

# EMT

## Steel Set Screw Couplings for Steel Conduit



### Features

- Pre-set & staked tri-head screws 1/2" thru 2"
- Hex head screws 2-1/2" thru 4"
- Heavy steel walls
- Concrete tight when taped
- UL listed for Steel EMT Conduit
- RoHS compliant

### Standard Materials



Steel

### Standard Finish

Zinc plated

### Applicable Third Party Standards

- UL Standard: 514B
- Fed. Spec. W-F-408E
- NEMA: FB-1
- UL Listed File # E200730 sizes 1/2" - 2"
- UL Listed File # E207875 sizes 2-1/2" - 4"

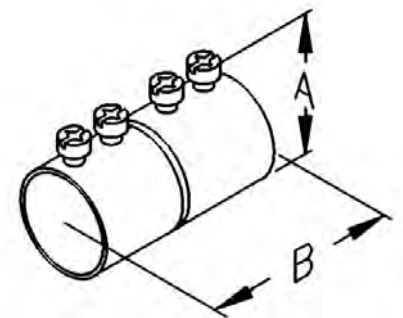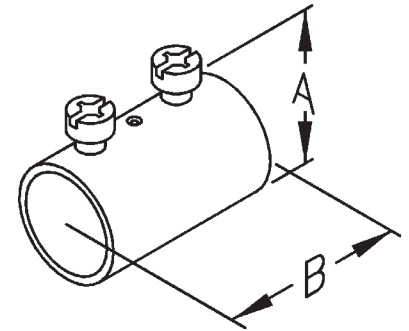

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	INNER PACK	MASTER PACK	WEIGHT PER C
Steel Setscrew Couplings						
SK50RKON	1/2"	0.875	1.625	50	500	7.8
SK75RKON	3/4"	1.130	1.875	25	250	12.7
SK100RKON	1"	1.190	2.313	20	200	19.6
SK125RKON*	1-1/4"	1.750	2.064	10	100	40.2
SK150RKON*	1-1/2"	2.000	3.000	10	100	57.5
SK200RKON*	2"	2.440	3.250	5	50	64.6
SK250RKON*^	2-1/2"	3.130	4.000	-	8	13.0
SK300RKON*^	3"	3.750	4.250	-	6	140.0
SK350RKON*^	3-1/2"	4.250	4.500	-	4	216.6
SK400RKON*^	4"	4.750	4.750	-	4	250.0

\* Furnished with four set screws

^ Indicates UL & CUL. Listed for EMT, IMC and Rigid conduit