

DESCRIPTION

The Lumark Axcent LED wall mount luminaire provides a flush-mounted, architectural design with high performing, energy-efficient illumination resulting in up to 95% energy and maintenance savings over traditional sources. The die-cast aluminum construction along with stainless steel hardware, gasketed housing, and sealed optical compartment make the Axcent impervious to contaminants. The Axcent replaces 70W to 450W metal halide equivalents making it ideal for pathway illumination, building entrances, vehicle ramps, schools, tunnels, stairways, loading docks and floodlighting applications.

Catalog #		Type	
Project			
Comments		Date	
Prepared by			

SPECIFICATION FEATURES

Construction

Low-profile LED design with rugged die-cast aluminum housing. Matching housing styles incorporate both a full cutoff and refractive lens design. External fin design on the back of the fixture extracts heat from the surface resulting in a thermally optimize design for longer luminaire life. One-piece silicone gasket seals the fixture, keeping out moisture and dusts in compliance with IP66 rating. The fixture is 3G vibration rated (ANSI C136.31) and UL/cUL listed ensuring reliability and durability in wall mount applications.

Optical

Silicone-sealed optical LED chamber incorporates a custom engineered reflector providing high-efficiency illumination. Refractive lens models incorporate a molded lens assembly designed for maximum forward throw. Optional glare free lens is available for visual comfort at reduced lumen values. Available in Type IV distribution with lumen packages ranging from 1,800 to 17,300 nominal lumens. Light engine configurations consist of high-efficiency, discrete LEDs mounted to metal-core circuit boards to maximize heat

dissipation and promote long life. Offered in standard 4000K (+/- 275K) CCT and minimum 70 CRI. Optional 5000K CCT / 70CRI min and 3000K / 80CRI min are available.

Electrical

LED driver is mounted to the die-cast aluminum housing for optimal heat sinking. Integral LED electronic driver incorporates 6kV surge protection. Class 1 electronic drivers have a power factor >90% and THD<20%. 120-277V 50/60Hz standard operation with optional 347V 60Hz or 480V 60Hz options available. 480V is compatible for use with 480V Wye systems only. 0-10V dimming driver is standard with leads external to the fixture to accommodate controls capability such a dimming and occupancy. 10kV/10kA surge protection option is available.

Mounting

Steel wedge mounting plate fits directly to 4" standard j-box or directly to wall with the "Hook-N-Lock" mechanism for quick installation. Secure with two captive, corrosion resistant, stainless steel set screws, which are concealed but accessible from bottom of fixture. Optional floodlight kits available in slipfitter,

knuckle and trunion mount configurations. Optional pole mount configuration provides a quick-mount solution to round and square poles. The easy installation arm accommodates multiple drill patterns ranging from 1-1/2" to 4-7/8".

Emergency Egress

Optional integral cold weather battery emergency egress includes emergency operation test switch, an AC-ON indicator light and a premium, maintenance-free battery pack. The separate emergency lighting LEDs are wired to provided redundant emergency lighting. Listed to UL Standard 924, Emergency Lighting.

Finish

The Axcent is protected with five state super TGIC polyester powder coat paint in carbon bronze and five other color finishes. Super TGIC power coat paint finishes withstand extreme climate conditions while providing optimal color and gloss retention of the installed life.

Warranty

Five-year warranty.



AXCS / AXCL AXCENT

14-123W
LED

APPLICATIONS:
WALL / SURFACE / INVERTED
FLOODLIGHTING / PATHWAY /
SITE LIGHTING



CERTIFICATION DATA

3G Vibration Rated
Dark Sky Approved (Fixed mount,
Full cutoff, and 3000K CCT only)
DesignLights Consortium® Qualified*
FCC Class A
IP66 Rated
ISO9001, UL/cUL Wet Location Listed
ROHS Compliant
Title 24 Compliant
UL924 Listed (CBP Models)


TECHNICAL DATA

-40°C Minimum Ambient Temperature
+40°C Maximum Ambient Temperature
External Supply Wiring 90°C Minimum

SHIPPING DATA:

Approximate Net Weight:
Small fixture=5 lbs. [2.36 kgs.]
Small with sensor or CBP=10 lbs. [4.40 kgs.]
Large fixture=12 lbs. [5.45 kgs.]
Large with sensor or CBP=17 lbs. [7.73 kgs.]
Large with sensor & CBP=21 lbs. [9.54 kgs.]

DIMENSIONS

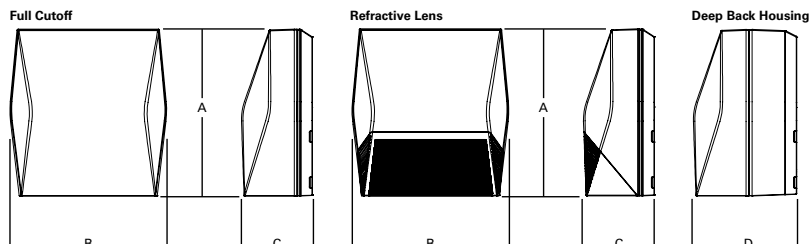


Dimensional Data


	AXCS Small	AXCL Large
A	8" [202mm]	11-1/2" [292mm]
B	7-1/2" [190mm]	10-3/4" [273mm]
C	3-5/8" [94mm]	4-7/8" [124mm]
D	6-1/8" [155mm]	7-1/8" [181mm]

MOUNTING OPTIONS


Slipfitter Mount (Small)
Tenon OD: 2-3/8" | EPA: 0.60

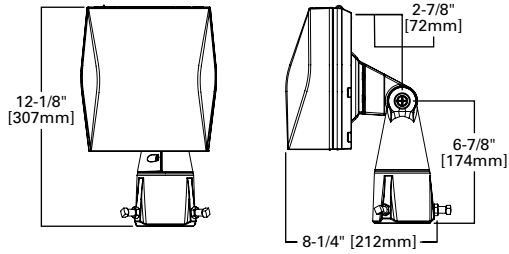


Knuckle Mount (Small)

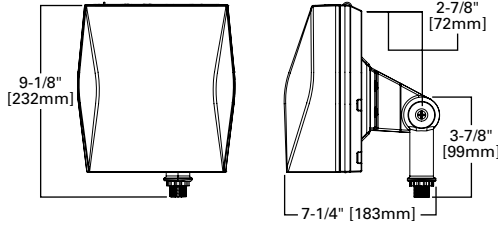


Trunnion Mount Detail

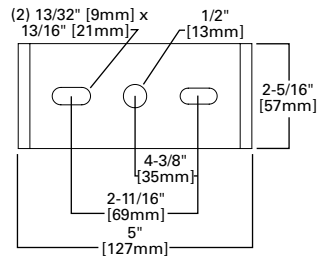


Trunnion Mount (Small)

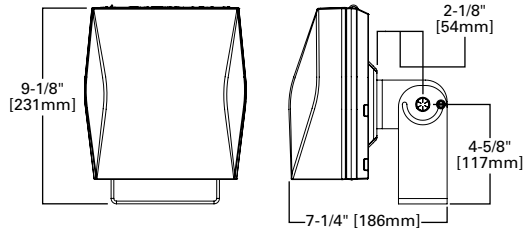


Slipfitter Mount (Large)
Tenon OD: 2-3/8" to 2-7/8" | EPA: 1.10

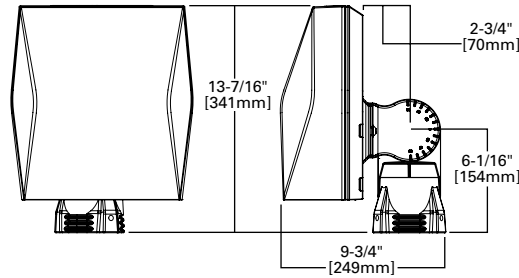


Pole Mount Arm Drill Pattern

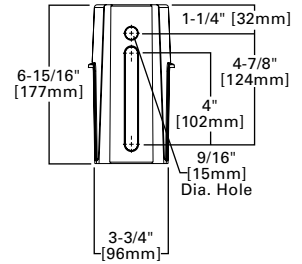

Trunnion Mount (Large)

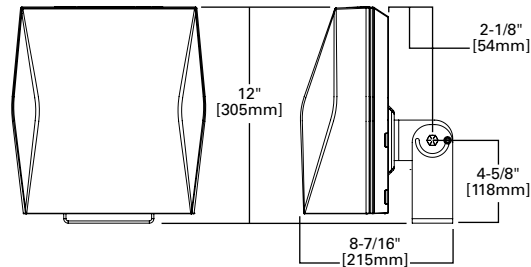


Pole Mount Arm (Shown with Large fixture)
EPA: 1.1

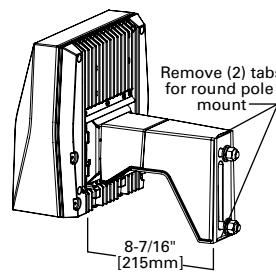


Through-branch Wiring


(Available through rated junction box - supplied by others)

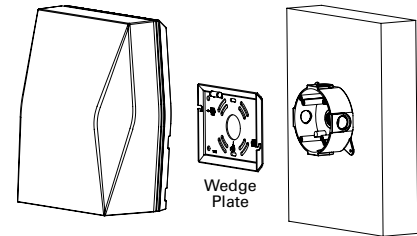


Wall Mount Plate Detail (Large)

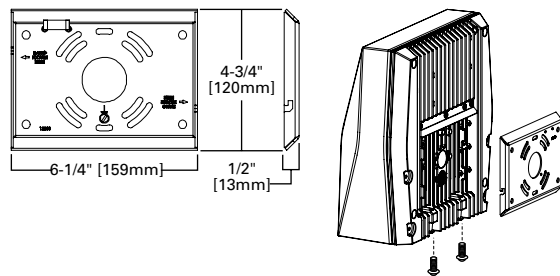


Wall Mount Plate Detail (Small)

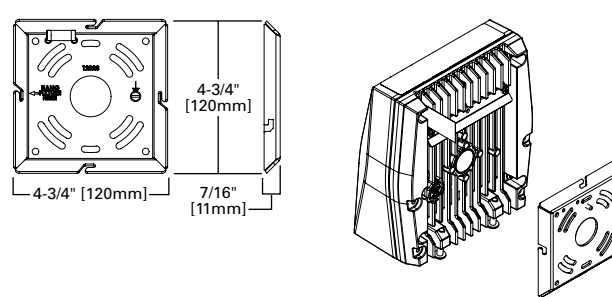


LumaWatt Pro Sensor

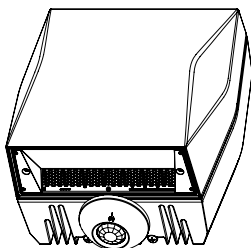


Occupancy Sensor

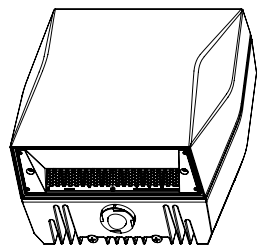


Button Photocontrol



Vandal Shield



Wire Guard

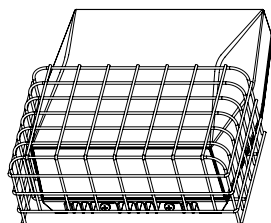

CONTROL OPTIONS

0-10V

This fixture is offered standard with 0-10V dimming driver(s) for use with a lighting control panel or other control method.

Photocontrol (PC1, PC2, and PC)

Optional button-type photocontrol provides a flexible solution to enable "dusk-to-dawn" lighting by sensing light levels.

After Hours Dim (AHD)



This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a "dusk-to-dawn" period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.

Dimming Occupancy Sensor (MSP/DIM-LXX and MSP-LXX)

These sensors are factory installed in the luminaire housing. When the MSP/DIM-LXX sensor option is selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MSP/DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of ten minutes. The MSP-LXX sensor is factory preset to turn the luminaire off after five minutes of no activity.

These occupancy sensors includes an integrated photocell that can be activated with the ISHH-01 accessory for "dusk-to-dawn" control or daylight harvesting - the factory preset is ON. The ISHH-01 is a wireless tool utilized for changing the dimming level, time delay, sensitivity and other parameters.


A variety of sensor lens are available to optimize the coverage pattern for mounting heights from 8'-30'.

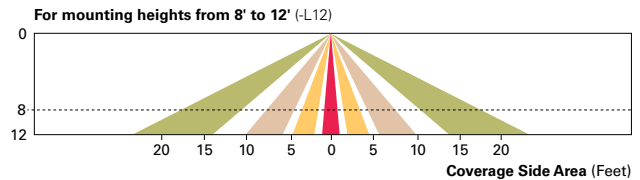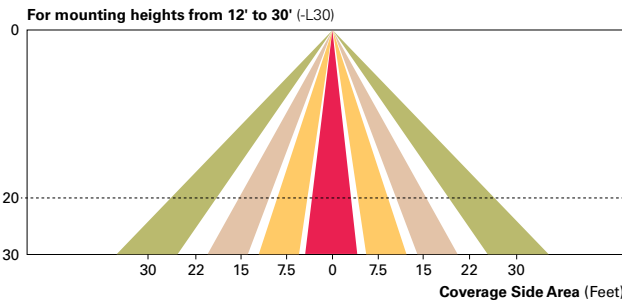

WaveLinx Wireless Control and Monitoring



The WaveLinx Outdoor control platform operates on a wireless mesh network based on IEEE 802.15.4 standards enabling wireless control of outdoor lighting. Use the WaveLinx Mobile application for set-up and configuration. At least one Wireless Area Controller (WAC) is required for full functionality and remote communication (including adjustment of any factory pre-sets).

WaveLinx Wireless Sensor (SWPD4 and SWPD5) These outdoor sensors offer passive infrared (PIR) occupancy and a photocell for closed loop daylight sensing. These sensors can be factory installed or field-installed via simple, tool-less integration into luminaires equipped with the Zhaga Book 18 compliant 4-PIN receptacle (ZW). These sensors are factory preset to dim down to approximately 50 percent power after 15 minutes of no activity detected. These occupancy sensors include an integral photocell for "dusk-to-dawn" control or daylight harvesting that is factory-enabled. A variety of sensor lenses are available to optimize the coverage pattern for mounting heights from 7'-40'.

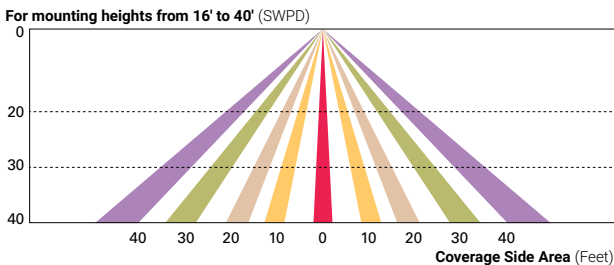

Enlighted Wireless Control and Monitoring System (LWR-LW and LWR-LN)

The Enlighted System is a connected lighting solution that combines LED luminaires with an integrated wireless sensor system. The sensor controls the lighting system in compliance with the latest energy codes and collects valuable data about building performance and use. Software applications turn the granular data into information through energy dashboards and specialized apps that make it simple and help optimize the use of other resources beyond lighting.

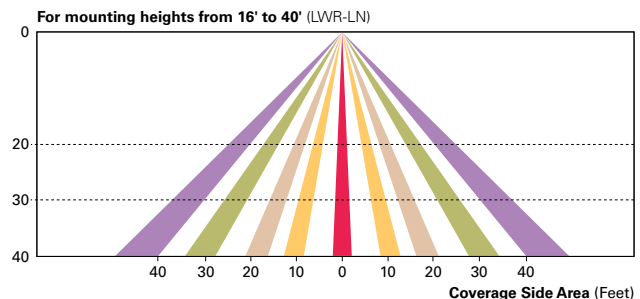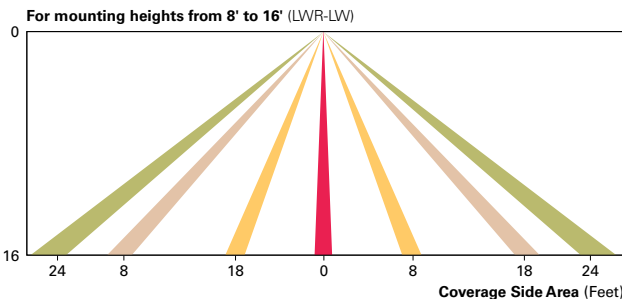

POWER AND LUMENS (AXCENT SMALL)

Light Engine		AXCS1A	AXCS2A	AXCS3A	AXCS4A	AXCS5A
Power (Watts)		14	21	27	44	52
Input Current @ 120V (A)		0.12	0.18	0.23	0.37	0.43
Input Current @ 240V (A)		0.06	0.09	0.11	0.18	0.22
Input Current @ 277V (A)		0.05	0.08	0.10	0.16	0.19
Input Current @ 347V (A)		0.04	0.06	0.08	0.13	0.15
Input Current @ 480V (A)		0.03	0.04	0.06	0.09	0.11
Configuration						
Full Cutoff	4000K/5000K Lumens	1,806	2,561	3,537	5,520	6,300
	3000K Lumens	1,526	2,164	2,989	4,665	5,324
	BUG Rating	B1-U0-G0	B1-U0-G0	B1-U0-G0	B2-U0-G1	B2-U0-G1
Refractive Lens	4000K/5000K Lumens	1,915	2,716	3,704	5,858	6,699
	3000K Lumens	1,618	2,295	3,130	4,950	5,661
	BUG Rating	B1-U3-G2	B1-U3-G2	B1-U3-G2	B1-U4-G3	B1-U4-G3

POWER AND LUMENS (AXCENT LARGE)

Light Engine		AXCL6A	AXCL8A	AXCL10A	AXCL12A
Power (Watts)		56	72	102	123
Input Current @ 120V (A)		0.44	0.60	0.83	1.01
Input Current @ 240V (A)		0.22	0.31	0.41	0.51
Input Current @ 277V (A)		0.20	0.27	0.36	0.45
Input Current @ 347V (A)		0.17	0.22	0.30	0.37
Input Current @ 480V (A)		0.13	0.16	0.22	0.27
Configuration					
Full Cutoff	4000K Lumens	7,594	9,696	13,283	16,823
	5000K Rating	7,465	9,531	13,058	16,538
	3000K Lumens	6,619	8,450	11,577	14,662
	BUG Rating	B1-U0-G1	B1-U0-G1	B3-U0-G2	B3-U0-G2
Refractive Lens	4000K Lumens	7,809	9,970	13,641	17,346
	5000K Rating	7,689	9,817	13,450	17,034
	3000K Lumens	6,817	8,704	11,924	15,102
	BUG Rating	B1-U4-G4	B2-U5-G5	B2-U5-G5	B2-U5-G5

POWER AND LUMENS (SMALL + CBP)

Light Engine		AXCS1A	AXCS2A	AXCS3A	AXCS4A
Power (Watts)		18	25	31	48
Input Current @ 120V (A)		0.15	0.21	0.26	0.40
Input Current @ 240V (A)		0.08	0.11	0.13	0.20
Input Current @ 277V (A)		0.07	0.09	0.11	0.18
Configuration					
Full Cutoff	4000K/5000K Lumens	629	587	647	570
	3000K Lumens	531	496	547	482
Refractive Lens	4000K/5000K Lumens	667	623	686	605
	3000K Lumens	563	526	580	511

Note: Power and current based on full power consumption while CBP is charging. Lumen outputs are while operating in emergency mode only.

POWER AND LUMENS (LARGE + CBP)

Light Engine		AXCL6A	AXCL8A	AXCL10A
Power (Watts)		60	76	106
Input Current @ 120V (A)		0.50	0.63	0.88
Input Current @ 240V (A)		0.25	0.32	0.44
Input Current @ 277V (A)		0.22	0.27	0.38
Configuration				
Full Cutoff	4000K/5000K Lumens	1,070		
	3000K Lumens	945		
Refractive Lens	4000K/5000K Lumens	1,098		
	3000K Lumens	973		

Note: Power and current based on full power consumption while CBP is charging. Lumen outputs are while operating in emergency mode only.

LUMEN MAINTENANCE (AXCENT SMALL)

Ambient Temperature	TM-21 Lumen Maintenance (72,000 Hours)	Theoretical L70 (72,000 Hours)
Up to 3A		
25°C	90%	246,000
40°C	90%	225,000
50°C	89%	195,000
Up to 5A		
25°C	89%	240,000
40°C	88%	223,000
50°C	87%	186,000

LUMEN MAINTENANCE (AXCENT LARGE)

Ambient Temperature	TM-21 Lumen Maintenance (72,000 Hours)	Theoretical L70 (72,000 Hours)
Up to 8A		
25°C	94%	556,000
40°C	94%	556,000
50°C	92%	340,000
Up to 10A		
25°C	94%	556,000
40°C	94%	478,000
50°C	87%	207,000
Up to 12A		
25°C	94%	151,000
40°C	81%	125,000

LUMEN MULTIPLIER

Ambient Temperature	Lumen Multiplier
10°C	1.02
15°C	1.01
25°C	1.00
40°C	0.97

ORDERING INFORMATION

Sample Number: AXCS1A-AP-347V

Model Series ¹	LED Color Temperature	Color	Options (Add as Suffix)
Full Cutoff AXCS1A=14W AXCS2A=21W AXCS3A=27W AXCS4A=44W AXCS5A=52W AXCL6A=56W AXCL8A=72W AXCL10A=102W AXCL12A=123W Refractive Lens AXCS1ARL=14W AXCS2ARL=21W AXCS3ARL=27W AXCS4ARL=44W AXCS5ARL=52W AXCL6ARL=56W AXCL8ARL=72W AXCL10ARL=102W AXCL12ARL=123W	[Blank]=4000K, Neutral C=5000K, Cool W=3000K, Warm	[Blank]=Carbon Bronze (Standard) WT=Summit White BK=Black AP=Grey GM=Graphite Metallic DP=Dark Platinum	347V=347V ² 480V=480V ² PC1=Photocontrol 120V ^{3,4,5} PC2=Photocontrol 208-277V, 347V, 480V ^{4,5,6} PC=Photocontrol 120-277V, 347V, 480V ^{4,7,8} KKIT=Knuckle Floodlight Mount ⁷ TRNKIT=Trunnion Floodlight Mount SFKIT=Slipfitter Floodlight Mount PMAKIT=Pole Mount Arm ZW=WaveLinX-enabled 4-PIN Twistlock Receptacle ^{4,9} ZW-SWPD4XX=WaveLinX Wireless Sensor, 7' - 15' Mounting Height ^{4,9,10,11} ZW-SWPD5XX=WaveLinX Wireless Sensor, 15' - 40' Mounting Height ^{4,9,10,11} LWR-LW=Enlighted Wireless Sensor, Wide Lens for 8' - 16' Mounting Height ^{4,9,12} LWR-LN=Enlighted Wireless Sensor, Narrow Lens for 16' - 40' Mounting Height ^{4,9,12} MSP/DIM-L12=Integrated Sensor for Dimming Operation, 8' - 12' Mounting Height ^{4,9,13} MSP/DIM-L30=Integrated Sensor for Dimming Operation, 12' - 30' Mounting Height ^{4,9,13} MSP-L12=Integrated Sensor for ON/OFF Operation, 8' - 12' Mounting Height ^{4,9,13} MSP-L30=Integrated Sensor for ON/OFF Operation, 12' - 30' Mounting Height ^{4,9,13} CBP=Cold Weather Battery Pack ^{3,11,12,13,14,15} CBP-CEC=Cold Weather Battery Pack, CEC compliant ^{3,14,15,16,17,18} 10K=10kV/10kA Surge Protection HA=50°C High Ambient ^{15,19} GRF=Glare Reducing Lens ²⁰ AHD145=After Hours Dim, 5 Hours ^{5,21} AHD245=After Hours Dim, 6 Hours ^{5,21} AHD255=After Hours Dim, 7 Hours ^{5,21} AHD355=After Hours Dim, 8 Hours ^{5,21}
Accessories (Order Separately) ²²			
VS/AXCS=Vandal Shield Axcnt Small ^{7,23} VS/AXCS-MS=Vandal Shield Axcnt Small (With Motion Sensor) ^{7,23} WG/AXCS=Wire Guard Axcnt Small ⁷ WG/AXCS-MS=Wire Guard Axcnt Small (With Motion Sensor) ⁷ VS/AXCL=Vandal Shield Axcnt Large ^{5,23} VS/AXCL-MS=Vandal Shield Axcnt (With Motion Sensor) ^{5,23} WG/AXCL=Wire Guard Axcnt Large ⁵ WG/AXCL-MS=Wire Guard Axcnt (With Motion Sensor) ⁵ KKIT/AXCS-XX=Knuckle and Visor Floodlight Kit (For Axcnt Small) ⁷ SFKIT/AXCS-XX=Slipfitter Floodlight Kit (For Axcnt Small) ⁷ TRNKIT/AXCS-XX=Trunnion and Visor Floodlight Kit (For Axcnt Small) ⁷			TRNKIT-XX=Trunnion Floodlight Kit (For Axcnt Large) ⁵ SFKIT-XX=Slipfitter Floodlight Kit (For Axcnt Large) ⁵ PMAKIT-XX=Pole Mount Kit ISHH-01=Integrated Sensor Programming Remote ²⁴ MA1010-XX=Single Tenon Adapter for 3-1/2" O.D. Tenon MA1011-XX=2@180° Tenon Adapter for 3-1/2" O.D. Tenon MA1017-XX=Single Tenon Adapter for 2-3/8" O.D. Tenon MA1018-XX=2@180° Tenon Adapter for 2-3/8" O.D. Tenon SWPD4-XX=WaveLinX Wireless Sensor, 7' - 15' Mounting Height ^{10,11,25} SWPD5-XX=WaveLinX Wireless Sensor, 15' - 40' Mounting Height ^{10,11,25}

- NOTES:**
1. DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details.
 2. Transformer used only when ordered with motion sensor or AXCS1 through AXCS5 or AXCL6 fixture wattages.
 3. Not available in 347 or 480 VAC.
 4. Button photocontrol and any motion sensor (MSP, ZW, or LWR) not offered together.
 5. Only available on AXCL6-AXCL12 models.
 6. Used with 277, 347, and 480 VAC options.
 7. Only available on AXCS1-AXCS5 models.
 8. This configuration may contain materials that are not RoHS compliant. Contact your lighting representative for more information.
 9. Uses deep back housing.
 10. Sensor passive infrared (PIR) may be overly sensitive when operating below -20°C (-4°F). For the device to be field-configurable, requires WAC Gateway components WAC-PoE and WPOE-120 in appropriate quantities. Only compatible with WaveLinX system and software and requires system components to be installed for operation. See website for more Wavelinx application information.
 11. Replace XX with sensor color (WH, BZ, or BK).
 12. Enlighted wireless sensors are factory installed and require network components LWP-EM-1, LWP-GW-1, and LWP-PoE8 in appropriate quantities. See website for application information.
 13. The ISHH-01 accessory is required to adjust parameters.
 14. Ambient operating temperature -20°C to 25°C for AXCL6 through AXCL10. Ambient operating temperature -20°C to 30°C on AXCS4 models. Ambient operating temperature -20°C to 40°C on AXCS1 through AXCS3 models.
 15. Not available with AXCS5 or AXCL12 models.
 16. Uses deep back housing for AXCS1, AXCL2, AXCS3, and AXCS4 models.
 17. Not to be mounted in upwards / inverted orientation. Downlight wall mount only for AXCS1 through AXCS4.
 18. In AXCS1, AXCS2, AXCS3, and AXCS4 models, CBP cannot be used with any sensor option (PC, MSP, ZW, or LWR).
 19. Can not be ordered with CBP or PC options.
 20. Use dedicated IES files on product website for lumen values and distributions.
 21. Requires the use of PC1 or PC2 button photocontrol. See After Hours Dim supplemental guide for additional information.
 22. Replace XX with color designation.
 23. For use with full cutoff lens configurations only.
 24. This tool enables adjustment to parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult you lighting representative for more information.
 25. Requires 4-PIN twistlock receptacle (ZW) option.

STOCK ORDERING INFORMATION

Model Series ¹			
Full Cutoff		Refractive Lens	
AXCS1A=14W	AXCL10A=102W	AXCS1ARL=14W	AXCL10ARL=102W
AXCS2A=21W	AXCL12A=123W	AXCS2ARL=21W	AXCL12ARL=123W
AXCS3A=27W	AXCL6A-347V=56W	AXCS3ARL=27W	AXCL6ARL-347V=56W
AXCS4A=44W	AXCL8A-347V=72W	AXCS4ARL=44W	AXCL8ARL-347V=72W
AXCS5A=52W	AXCL10A-347V=102W	AXCS5ARL=52W	AXCL10ARL-347V=102W
AXCL6A=56W	AXCL12A-347V=123W	AXCL6ARL=56W	AXCL12ARL-347V=123W
AXCL8A=72W		AXCL8ARL=72W	

- NOTES:**
1. All stock configurations are 4000K color temperatures, standard Carbon Bronze finish, and wall mount configuration.



Cooper Lighting Solutions
 1121 Highway 74 South
 Peachtree City, GA 30269
 P: 770-486-4800
 www.cooperlighting.com

Specifications and dimensions subject to change without notice.