

## ALUMINUM SPLICER-REDUCER • TYPE SR

Copper or aluminum conductors



486 B  
LISTED  
AL9 CU



- Body, fabricated from high strength aluminum alloy
- Solid center barrier
- Electro tin plated
- Rounded corner for easy taping




FIG. 1




FIG. 2

Catalog Number	Torque Value In-Lbs.	Fig.	Conductor Range	Approximate Dimensions		
				H in	W in	L in
SR-2	50	1	14-2	3/16	1/2	1 3/8
SR-0	50	1	14-1/0	3/4	3/4	1 29/32
SR-250	275	2	6-250MCM	1 1/8	1	3 15/16
SR-250-2	275	1	6-250MCM	1 1/8	1	1 15/16
SR-350	275	2	6-350MCM	1 3/16	1 1/8	4 3/16
SR-350-2	275	1	6-350MCM	1 3/16	1 1/8	2 5/8
SR-500	375	2	2-500MCM	1 1/2	1 3/8	5
SR-750	375	2	250-750MCM	1 3/4	1 5/8	6 1/4

## ALUMINUM SOLDERLESS PANELBOARD LUGS • TYPE PB

For copper or aluminum conductors



486 B  
LISTED  
AL9 CU



Body, fabricated from high strength aluminum alloy extrusions. Lug is 100% re-usable using hex wrench. No special tools required.

Maximum conductivity, compact design, light weight with ultimate strength.

Finish, electro-tin plated to assure minimum contact resistance and protection against corrosion when used with copper wire. (For added protection apply Penn-Union Cual-Aid® to cable before installation.)




FIG. 1

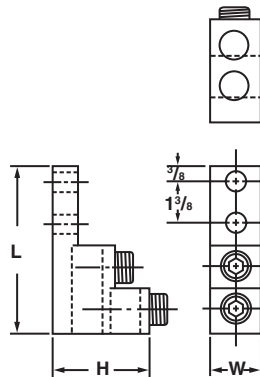


FIG. 2




FIG. 3




FIG. 4

Catalog Number	Torque Value In-Lbs.	Fig.	No. of Conductors	Conductor Range	Stud Size	Approximate Dimensions		
						H in	W in	L in
PB2-300	275	1	2	6-300MCM	5/16(1)	2	1	3
PB2-600	375	2	2	2-600MCM	3/8(2)	3	1 1/2	4 29/32
PB2-750	375	2	2	1/0-750MCM	3/8(2)	3	1 9/16	4 29/32
PB3-600	375	3	3	2-600MCM	3/8(2)	3	2 1/2	4 29/32
PB3-750	375	3	3	1/0-750MCM	3/8(2)	3	2 27/32	4 29/32
PB4-600	375	4	4	2-600MCM	3/8(2)	3	2 1/2	4 29/32
PB4-750	375	4	4	1/0-750MCM	3/8(2)	3	2 27/32	4 29/32