




"The Diamond of the Industry"

## Rigid-IMC Connectors Compression Type - (No Thread)

- Industrial specification grade, screw machined steel, zinc plated
- UL Listed Rain Tight and Concrete Tight 1/2" – 2"
- UL Listed Concrete Tight 2-1/2" – 4"

Cat. #	Size	Unit Ctn	Std Pkg	WT/100
NT2750	1/2"	25	250	13
NT2751	3/4"	20	100	20
NT2752	1"	5	50	36
NT2753	1-1/4"	5	25	48
NT2754	1-1/2"	5	25	70
NT2755 †	2"	5	25	100
NT2756 * †	2-1/2"	-	5	275
NT2757 *	3"	-	3	333
NT2758 * †	3-1/2"	-	3	475
NT2759 * †	4"	-	2	547
NT2770 *	5"	-	1	1100

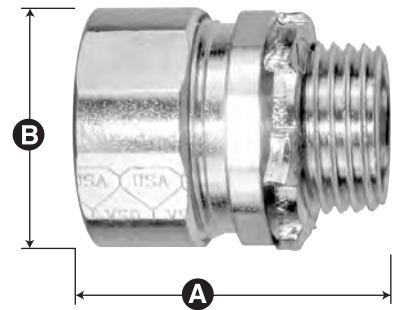

E93605



LR61799

## With Insulated Throat

Cat. #	Size	Unit Ctn	Std Pkg	WT/100
NT2750B	1/2"	25	250	13
NT2751B	3/4"	20	100	20
NT2752B	1"	5	50	36
NT2753B	1-1/4"	5	25	48
NT2754B	1-1/2"	5	25	70
NT2755B †	2"	5	25	100
NT2756B * †	2-1/2"	-	5	275
NT2757B *	3"	-	3	333
NT2758B * †	3-1/2"	-	3	475
NT2759B * †	4"	-	2	547
NT2770B *	5"	-	1	1100

## Dimensional Table

Cat. #	A Length	B Diameter
NT2750/B	1.35	1.17
NT2751/B	1.48	1.43
NT2752/B	1.58	1.75
NT2753/B	1.86	2.15
NT2754/B	1.94	2.38
NT2755/B	2.49	3.38
NT2756/B	3.88	3.93
NT2757/B	4.00	4.66
NT2758/B	4.31	5.20
NT2759/B	4.50	5.75
NT2770/B	5.00	7.00