


6 - 25 Ton Unitary Split Systems Outdoor

Unit Overview	
Model	TTA12043CAB**AE00000000000000 00000000000000
Unit Tonnage	10 Tons
Refrigeration Circuit / Stage	Manifold Compressors / Single Circuit
Unit Function	Cooling



Electrical Information			
Unit Voltage	208-230/60/3	Compressor 1 RLA	16.00 A
MCA	41.00 A	Compressor 2 RLA	16.00 A
MOP	50.00 A	Cond. Motor 1 FLA	4.80 A


These cut sheets are for reference only. Stock model numbers may differ. Contact your salesperson for job specific submittals for engineer approval.

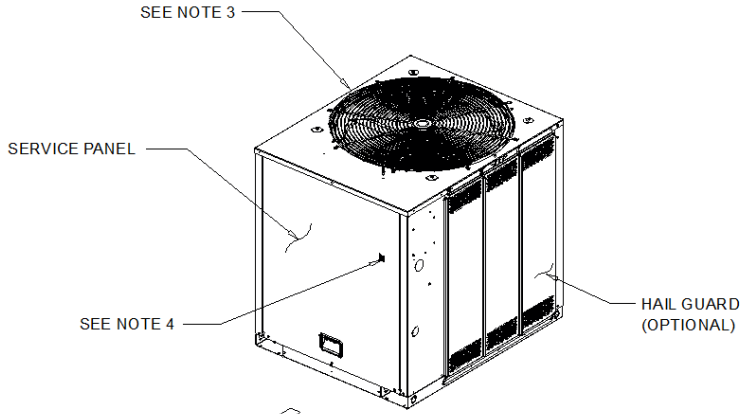

SERVICE CLEARANCE
48" (SEE NOTE 2
FOR CLEARANCE)

NOTES:

1. ACCESS OPENING IS FOR FIELD INSTALLED BAYLOAM ACCESSORY.
2. MINIMUM CLEARANCE FOR PROPER OPERATION IS 36" FROM WALLS, SHRUBBERY, PRIVACY FENCES ETC. MINIMUM CLEARANCE BETWEEN ADJACENT UNITS IS 72". RECOMMENDED SERVICE CLEARANCE 48"
3. TOP DISCHARGE AREA SHOULD BE UNRESTRICTED FOR 100" MINIMUM. UNIT SHOULD BE PLACED SO ROOF RUN-OFF WATER DOES NOT POUR DIRECTLY ON UNIT
4. OUTDOOR AIR TEMPERATURE SENSOR OPENING (DO NOT BLOCK OPENING)

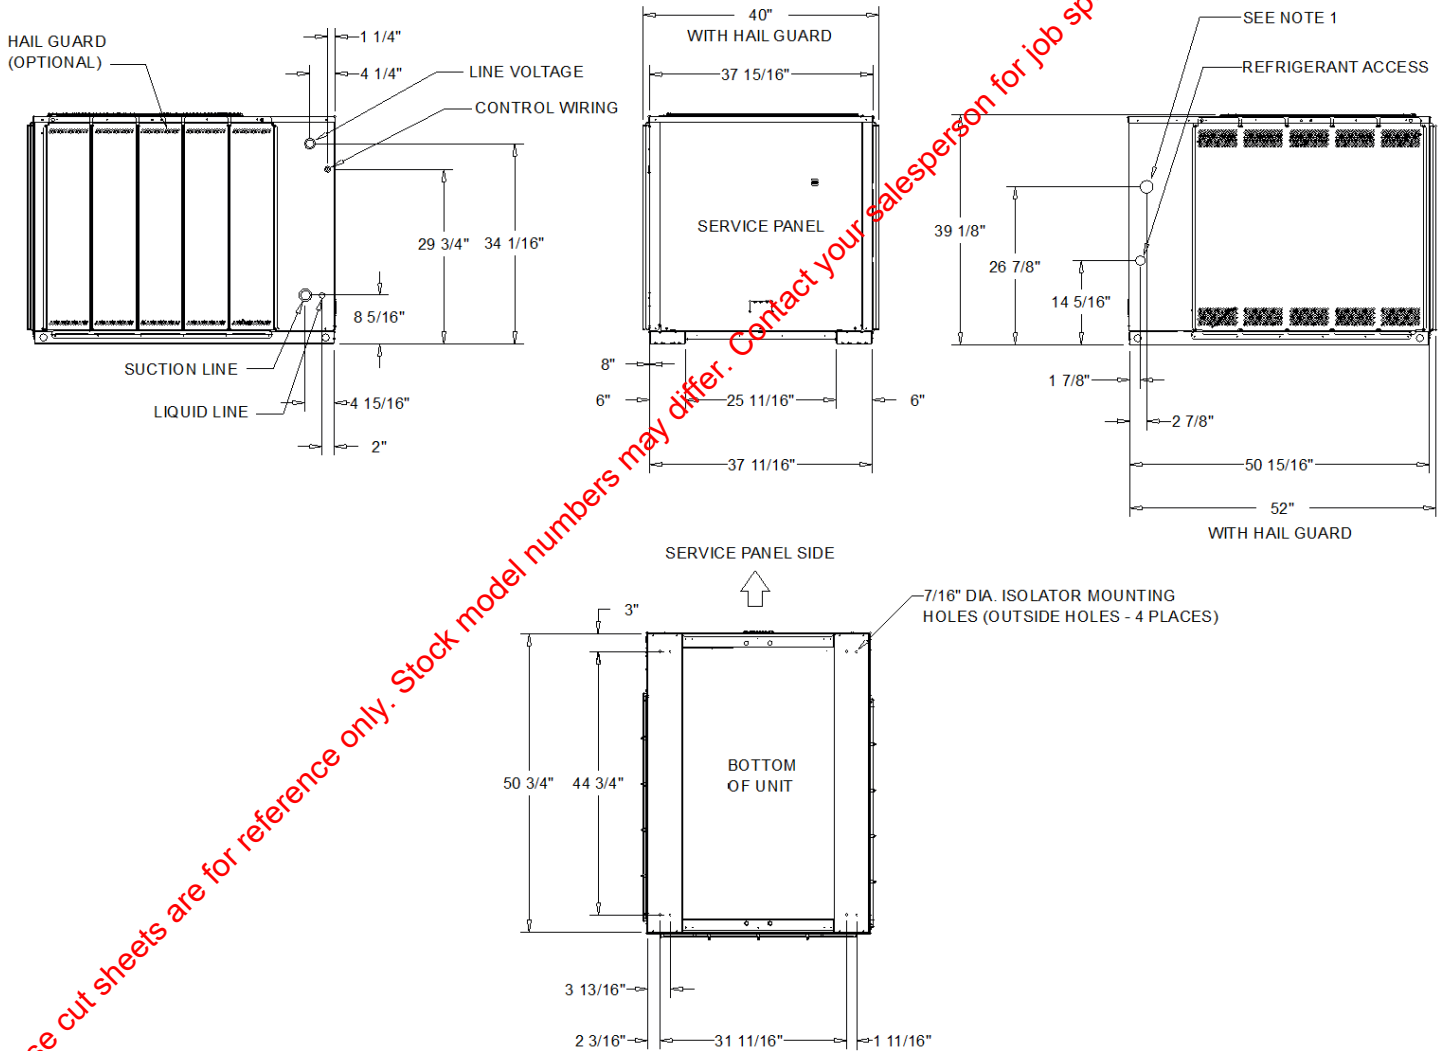

10 TON COOLING CONDENSER (MANIFOLDED COMPRESSOR)

DIMENSIONAL DRAWING

These cut sheets are for reference only. Stock model numbers may differ. Contact your salesperson for job specific submittals for engineer approval.



ELECTRICAL DATA CONDENSER

ELECTRICAL DATA		COMPRESSOR MOTOR		CONDENSER FAN MOTOR	
Model:	TTA12043C	No.:	2	No.:	1
Unit Operating Voltage:	187 - 253	Volts:	208-230	Volts:	208-230
Minimum Circuit Ampacity:	41.0	Phase:	3	Phase:	1
Maximum Fuse Size:	50.0	Amp-RLA:	16.0/16.0	Amp-FLA:	4.8
Maximum Circuit Breaker:	50.0	Amp-LRA:	110.0/110.0	Amp-LRA:	20.0
GENERAL DATA CONDENSER					
COOLING PERFORMANCE (1)(2)(3)(4)(5)			COMPRESSOR		
Matched Air Handler:	TWE1204*B*	Number:	Manifolded Scrolls		
Condensing Unit Only:	116,000	No. Compressor / Tons:	2/4.3		
ARI Net Cooling Capacity:	122,000				
Matched Air Handler (EER):	11.3				
Condensing Unit Only (EER):	12.5				
System KW:	10.3				
Condensing Unit KW:	9.3				
System IEER:	13.3				
			SYSTEM DATA (7)		
			No. Refrigerant Circuits:	1	
			Suction Line (in.) OD:	1 3/8" Horizontal / 1 1/8" Vertical	
			Liquid Line (in.) OD:	2"	
OUTDOOR COIL			OUTDOOR FAN		
Tube Size (in.) OD:	13/16"	No. Used/Diameter (in.):	1 / 28"		
Face Area (sq. ft.):	23 13/16"	Drive Type/No. Speeds:	DIRECT / 1		
Rows/FPI:	1/23	No. Motors/HP:	1 / 1		
			Motor RPM:	1,100	
REFRIGERANT CHARGE (Fld Supplied) (7)(8)					
TYPE:	R-410A				
(Circuits #1):	13.1 lb				
(Circuits #2):	N/A				

NOTES:

- Cooling performance is rated at 95 F ambient, 80 F entering dry bulb, 67 F entering wet bulb. Gross capacity does not include the effect of fan motor heat. ARI capacity is net and includes the effect of fan motor heat. Ratings shown are tested and certified in accordance with AHRI Standard 340/360 or 365 certification program.
- Standard 340/360 or 365 certification program.
- Condensing Unit Only Gross Cooling Capacity rate at 43 F saturated suction temperature and at 95 F ambient.
- ARI Net Cooling Capacity is calculated with matched blower coil and 25 ft. of OD interconnecting tubing. EER is rated at AHRI conditions and in accordance with DOE test procedures.
- Integrated Part Load Value is based on AHRI Standard 340/360 or 365. Units are rated at 80 F ambient, 80 F entering dry bulb, and 67 F entering wet bulb at AHRI rated CFM.
- Sound Rating shown is tested in accordance with AHRI Standard 270.
- Refer to refrigerant piping program for line sizing and line length.
- Refrigerant (operating) charge is for condensing unit (all circuits) with matching blower coils and 25 ft. of interconnecting refrigerant lines. All units are shipped with a small nitrogen holding charge only.

These cut sheets are for reference only. Stock model numbers may differ. Contact your salesperson for job specific submittals for engineer approval.

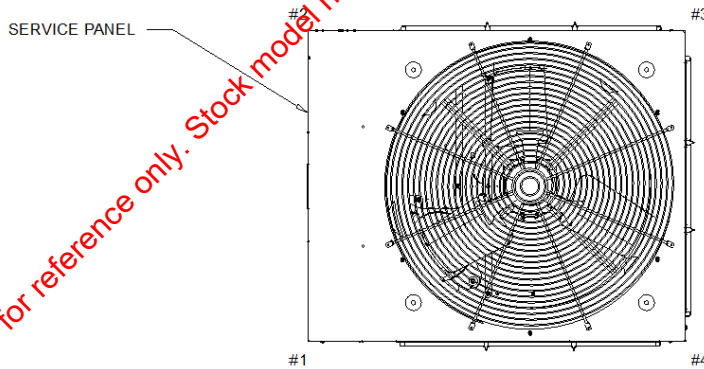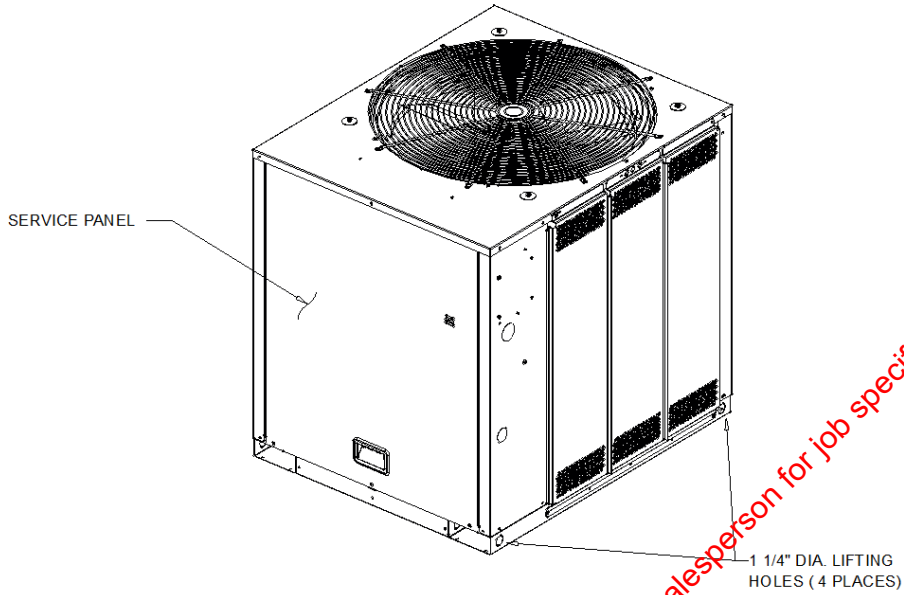

WEIGHTS AND CORNER WEIGHTS

Shipping:	474.0 lb
Net	417.0 lb
Corner 1:	110.0 lb
Corner 2:	168.0 lb
Corner 3:	87.0 lb
Corner 4:	52.0 lb

WEIGHTS AND LOAD POINT LOCATION

WEIGHT AND RIGGING

These cut sheets are for reference only. Stock model numbers may differ. Contact your salesperson for job specific submittals for engineer approval.

Refrigeration System - TTA Dual Manifolder Compressors

(TTA120F, TTA180F, TTA240F, TTA300F, TTA101F, TTA156F, TTA201F, TTA251F)

Single Refrigerant Circuit with Integral Subcooling Circuit.

Two (2) Direct Drive Hermetic Scroll Compressor

Suction Gas-Cooled Motors w/ +/- 10% Voltage Utilization Range of Unit Nameplate Voltage

Crankcase Heaters

Internal Temperature and Current Sensitive Motor Overloads

No Compressor Suction and/or Discharge Valves (Reduced Vibration/Sound)

Factory Installed Liquid Line Filter Drier

Phase Loss/Reverse Rotation Monitor

External High Pressure Cutout Devices

External Low Pressure Cutout Devices

Evaporator Defrost Control

Loss of Charge Protection (Discharge Line Thermostats)

Front or Rear Refrigerant Line Connections (TTA251300F only)

TTA Microchannel - General

Weatherproofed steel mounting/lifting rails Hermetic scroll compressors Microchannel condenser coils on select models Plate fin condenser coils Fans and motors Standard operating range 50-125°F (min. 0°F with low ambient accessory) Nitrogen holding charge Certified and rated in accordance with AHRI and DOE standards Certified to UL 1995

TTA Microchannel - Casing

Zinc coated, heavy gauge, galvanized steel Weather resistant baked enamel finish Meets ASTM B117, 672 hour salt spray test

Removable single side maintenance access panels

Lifting handles in maintenance access panels

Unit base provisions for forklift and/or crane lifting

TTA - Refrigeration System - Dual Manifolder Compressors (TTA120J, TTA180J, TTA240J, TTA300J)

Single refrigerant circuit with integral subcooling circuit Two (2) direct drive hermetic scroll compressor

Suction gas-cooled motors w/ ± 10% voltage utilization range of unit nameplate voltage Crankcase

Heaters Internal temperature and current sensitive motor overloads No compressor suction and/or

discharge valves (reduced vibration/sound) Factory installed liquid line filter drier Phase loss/reverse

rotation monitor External high pressure cutout devices External low pressure cutout devices

Evaporator defrost control Loss of charge protection (discharge line thermostats) Front or rear

refrigerant line connections (TTA180J/240J/300J only)

TTA Microchannel - Condenser Coil (Microchannel)

Microchannel coils burst tested by the manufacturer Coils shall be leak tested to ensure the pressure

integrity Factory pressure and leak tested to 660 psig Perforated steel hail guards available (factory

installed option or field installed accessory)

TTA Microchannel - Condenser Fan

26" or 28" propeller fan(s) Direct drive statically and dynamically balanced

TTA Microchannel - Condenser Motor(s)

Permanently lubricated totally enclosed or open construction Built-in current and thermal overloads

Ball or sleeve bearing type

TTA Microchannel - Controls

Choice of electromechanical or microprocessor Completely internally wired Numbered and colored

wires Contactor pressure lugs or terminal block Unit external mounting location for disconnect device

Single point power entry

TTA Controls: Electro-Mechanical

24V control circuit Control transformer Thermostat compatible Anti-Short Cycle Timer