For Residential and Commercial Applications		
Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

## BL12-\*\*WA Speedi Plumb<sup>®</sup> PLUS Braided Washing Machine Connector – Female Hose Thread

*Use:* For use in potable water distribution systems in accessible locations only.

### **Design Features:**

- Engineered polymer braided fibers bend freely without kinking or crimping
- Reinforced PVC inner hose ensures durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **8-sided pneumatic crimp** provides greater dependability for reliable nut-to-hose connections
- 🛚 🕑 No Lead

#### **Operating Specifications:**

Temperature:	40°- 140° F, intermittent to 180° F
Pressure:	125 PSI maximum

*Tubing Diameter:* 0.450" ID (0.660" OD)

MATERIAL SPECIFICATIONS		
Inner Hose	EPDM or reinforced PVC	
Braiding	PVC coated polyester yarn	
Barb	Brass	
Ferrule	Zinc-plated steel	
Nut	Brass, chrome plated	
Washer	Rubber	

W THE USP

#### Part Listing:

-	
BL12-48WA	3/4" female hose thread x 3/4" female hose thread x 48" length, sleeve
BL12-48WA B	3/4" female hose thread x 3/4" female hose thread x 48" length, bulk
BL12-48WA F	3/4" female hose thread x 3/4" female hose thread x 48" length, flag labeled
BL12-48WA P	3/4" female hose thread x 3/4" female hose thread x 48" length, bagged
BL12-60WA	3/4" female hose thread x 3/4" female hose thread x 60" length, sleeve
BL12-60WA B	3/4" female hose thread x 3/4" female hose thread x 60" length, bulk
BL12-60WA F	3/4" female hose thread x 3/4" female hose thread x 60" length, flag labeled
BL12-60WA P	3/4" female hose thread x 3/4" female hose thread x 60" length, bagged

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.




400.112 BL12-\*\*WA SPP Braided Washing Machine Connector REV 07/13

# BL12-\*\*WA Speedi Plumb<sup>®</sup> PLUS Braided Washing Machine Connector – Female Hose Thread

#### Part Listing (con't):

BL12-60WA PX2	3/4" female hose thread x 3/4" female hose thread x 60" length, 2 per bag, cutcase of 5
BL12-72WA	3/4" female hose thread x 3/4" female hose thread x 72" length, sleeve
BL12-72WA B	3/4" female hose thread x 3/4" female hose thread x 72" length, bulk
BL12-72WA F	3/4" female hose thread x 3/4" female hose thread x 72" length, flag labeled
BL12-72WA P	3/4" female hose thread x $3/4$ " female hose thread x $72$ " length, bagged

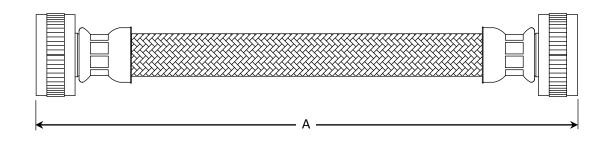

PART DIMENSIONS (Inches)		
Model	DIM. A	
BL12-48WA	48.0 / 49.0	
BL12-60WA	60.0 / 61.0	
BL12-72WA	72.0 / 73.0	

#### Listings & Certifications:

- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- No-Lead product CSA listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

