

COLUMBIA LIGHTING

is a recognized leader in providing quality and innovation at value. Columbia Lighting manufactures an array of commercial and industrial luminaires, leading the industry with exceptional efficacy, optical performance and quality.

INDOOR TABLE OF CONTENTS

CCL..... 13	CWP..... 20	VAPORTITES
CFP..... 14	CRW..... 21	PRODUCT SELECTION GUIDE..... 30
CBT..... 15	CUC..... 21	CLB..... 32
PANELS & TROFFERS	WRAPS	LINEAR HIGH BAY
PRODUCT SELECTION GUIDE..... 16	PRODUCT SELECTION GUIDE..... 22	PRODUCT SELECTION GUIDE..... 33
CTK..... 18	CSL..... 24	CRN2..... 34
RETROFIT	STRIPS	CRB..... 35
PRODUCT SELECTION GUIDE..... 19	PRODUCT SELECTION GUIDE..... 26	ROUND HIGH BAY
CNW..... 20	CVT..... 28	PRODUCT SELECTION GUIDE..... 36





CCL

CENTER-LENS TROFFER

The CCL is an efficient LED troffer with architectural style and appearance.

- Frosted acrylic lens
- Fully assembled for quick installation
- Universal voltage, 120-277V
- 0-10V Dimming
- Up to 118 lumens per watt
- IC rated

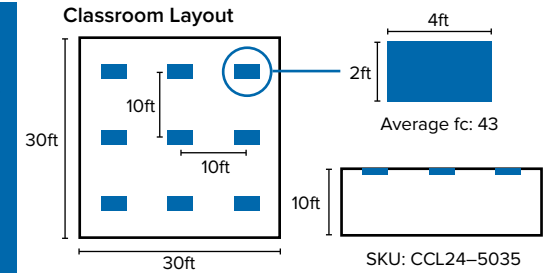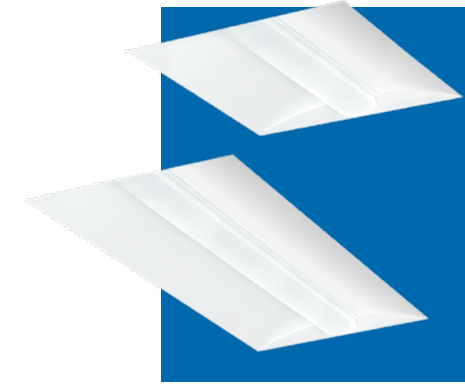

Fixture	Length	Width	Height	Weight
2'x2'	23.8in.	23.8in.	4.0in.	15lbs.
2'x4'	47.8in.	23.8in.	4.0in.	20lbs.




Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
2'x2'													
93077477	CCL22-3335	78531127503	3223	3500K	112	29	40	2 Lamp T8	PKA8TBHS
93077478	CCL22-3340	78531127510	3345	4000K	116	29	40	2 Lamp T8	PBRBS4UZ
2'x4'													
93077479	CCL24-5035	78531127527	5001	3500K	114	44	20	3 Lamp T8	PMRJBMVH
93077480	CCL24-5040	78531127534	5191	4000K	118	44	20	3 Lamp T8	PQVJUNK8
Accessories													
FK22	FK22	78531000752	-	-			-	-	-
FK24	FK24	78531038991	-	-			-	-	-

CFP

EDGE-LIT FLAT PANEL

The CFP offers Edge-Lit LED technology in a sleek flat panel design.

- Switchable Lumen technology
- Recessed or surface mount
- Universal voltage, 120–277V
- Flex and battery back up available in 5–10 day Quick–Ship program
- 0–10V
- IC rated

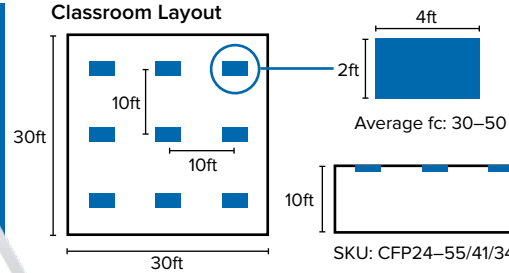

Fixture	Length	Width	Height	Weight
1'x4' Recessed	47.7in.	11.8in.	1.6in.	7.7lbs.
2'x2' Recessed	23.7in.	23.7in.	1.6in.	8.2lbs.
2'x4' Recessed	47.7in.	23.7in.	1.6in.	15.1lbs.

* Weights will differ for HE SKU luminaires,



Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
1'x4'													
93114030	CFP14-55/41/3435	78531140953	5500, 4100, 3400	3500K	117, 121, 125	50, 40, 31	28	2 Lamp T5 or T8	PLGW6YKU
93114031	CFP14-55/41/3440	78531140960	5500, 4100, 3400	4000K	122, 126, 130	50, 40, 31	28	2 Lamp T5 or T8	P7HF8LTI
2'x2'													
93114403	CFP22-3335-HE	78531140571	3300	3500K	114	44	56	2 Lamp T8	PNTBAJF4
93114405	CFP22-3340-HE	78531140595	3300	4000K	118	44	56	2 or 3 Lamp T8	PBJO7QT4
93114032	CFP22-40/33/2835	78531140977	4000, 3300, 2800	3500K	108, 113, 115	40, 30, 25	56	2 Lamp T8	PKQBM9G7
93114033	CFP22-40/33/2840	78531140984	4000, 3300, 2800	4000K	125, 131, 133	40, 30, 26	56	2 or 3 Lamp T8	PSB40AA2
2'x4'													
93114409	CFP24-4135-HE	78531140632	4100	3500K	114	44	28	2 Lamp T8	POFQBK4I
93114411	CFP24-4140-HE	78531140656	4100	4000K	118	44	28	2 Lamp T8	PS2Q2171
93114034	CFP24-55/41/3435	78531140991	5500, 4100, 3400	3500K	122, 125, 128	50, 40, 31	28	2 or 3 Lamp T8	PXE068MB
93114035	CFP24-55/41/3440	78531141004	5500, 4100, 3400	4000K	102, 104, 107	49, 39, 30	28	2 or 3 Lamp T8	P2FVDW6D
93114414	CFP24-7535	78531140687	7364	3500K	132	56	28	3 Lamp T8	PPBJZ6U8
93114415	CFP24-7540	78531140694	7534	4000K	133	56	28	3 Lamp T8	P4D29LN4

10-Day Quick-Ship options:
Add **ELL14** (Emergency Battery Pack Installed, 1400 Lumens) or **C588** (5-wire Flex) to any stocked option.
Examples: **CFP14-55/41/3435-ELL14**; **CFP14-55/41/3435-C588**



Accessories													
93078803	PLD10M	782520869335	-	-	-	-	-	-	-
93080406	PLRTS	782520869410	-	-	-	-	-	-	-
FK14	FK14	78531000745	-	-	-	-	-	-	-
FK22	FK22	78531000752	-	-	-	-	-	-	-
FK24	FK24	78531038991	-	-	-	-	-	-	-
93094847	CFPSMK-14	78531133283	-	-	-	-	-	-	-
93094848	CFPSMK-22	78531133290	-	-	-	-	-	-	-
93094849	CFPSMK-24	78531133306	-	-	-	-	-	-	-
93093113	CFPCM36Y SC5F-KIT	78531133023	-	-	-	-	-	-	-

CBT

BACK-LIT TROFFER

Affordable LED lensed troffer with smooth even illumination. Shallow height is ideal for tight plenum applications.

- Switchable Lumen, CCT technology
- Recessed or surface mount
- Smooth even illumination
- Universal Voltage, 120-277V
- 0-10 Dimming up to 10%
- IC rated

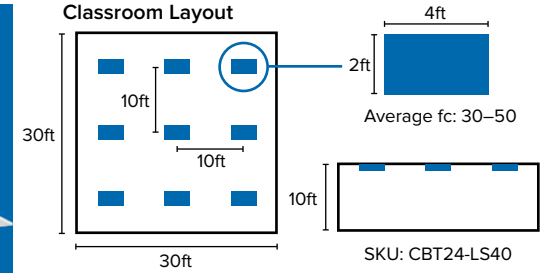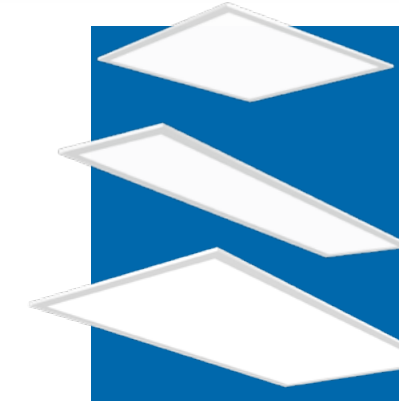







Fixture	Length	Width	Height	Weight
1'x4'	47.7in.	11.8in.	1.72in.	4.6lbs
2'x2'	23.7in.	23.7in.	1.7in.	4.4lbs.
2'x4'	47.7in.	23.7in.	1.72in.	8.8lbs.



Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
1'x4'													
93123033	CBT14-LS35	840141400013	4400, 3300, 2750	3500K	107, 114, 120	42, 31, 25	28	1 or 2 Lamp T8	PLSHP7YN9BKK
93123034	CBT14-LS40	840141400020	4400, 3300, 2750	4000K	108, 117, 122	41, 30, 24	28	1 or 2 Lamp T8	PLKLSJTZBRZ9
2'x2'													
93123035	CBT22-LS35	840141400037	4400, 3300, 2750	3500K	111, 119, 122	40, 30, 24	56	2 U-Lamp or 3 Lamp T8	PLQPR9EXDJEK
93123036	CBT22-LS40	840141400044	4400, 3300, 2750	4000K	113, 121, 126	40, 30, 24	56	2 U-Lamp or 3 Lamp T8	PLOQK9FLMTCC
2'x4'													
93133183	CBT24-LSCS	840141401881	5500, 4400, 3300	3500/ 4000/ 5000K	129, 136, 135	48, 38, 28	28	2 or 3 Lamp T8	-
Accessories													
FK14	FK14	78531000745	-	-	-	-	-	-	-
FK22	FK22	78531000752	-	-	-	-	-	-	-
FK24	FK24	78531038991	-	-	-	-	-	-	-
93123039	CBTSMK14	840141400075	-	-	-	-	-	-	-
93123040	CBTSMK22	840141400082	-	-	-	-	-	-	-
93123041	CBTMK24	840141400099	-	-	-	-	-	-	-

PANELS & TROFFERS

PRODUCT SELECTION GUIDE

	GOOD			BETTER			BEST				
	tradeSELECT™    CBT Back-Lit Troffer			tradeSELECT™   CFP Edge-Lit Flat Panel			High-Spec Panel  Scaler™ Edge-Lit Flat Panel				
FEATURES	Sizes		1x4	2x2	2x4	1x4	2x2	2x4	1x4	2x2	2x4
			Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	CRI		80+			80+			80+		
	CCT		3500K, 4000K			3500K, 4000K			3000K, 3500K, 4000K, 5000K		
	SpectraSync™ Color Tuning Technology		-			-			3000-5000K		
	Switchable Technology		Switchable Lumen, CCT			Switchable Lumen			-		
	SpectraSAFE™ Integrated Surveillance		-			-			-		
	Lumen Range		2941-5964			2876-7534			1492-8995		
	Mounting		Recessed	Surface	Cable	Recessed	Surface	Cable	Recessed	Surface	Cable
			Yes	Yes	-	Yes	Yes	Yes	Yes	Yes	Yes
Dimming		0-10V Dimming to 10%			0-10V Dimming to 10%			0-10V Dimming to 1% and Dim to Dark			
Emergency Battery Pack		-			Yes			Yes			
DTS (UL924 Bypass)		-			-			Yes			
Flex		-			Yes			Yes			
Efficacy (maximum LPW)		133			137			145			
DLC® DesignLights Consortium		Standard			Premium			Standard & Premium			
INTEGRATED CONTROLS	Standalone Occupancy & Daylighting		-			-			-		
	NX Standalone Occupancy & Daylighting		-			-			-		
	NX Networked Occupancy & Daylighting		-			-			-		
	PowerHUBB™		-			-			-		
USES	Applications		Education, Healthcare, Office, Retail			Education, Healthcare, Office, Retail, Cleanroom (ISO Class 5-9 Rating)			Education, Healthcare, Office, Retail, Cleanroom (ISO Class 5-9 Rating)		

DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org




CTK

TROFFER RETROFIT KIT

Retrofit for existing prismatic or parabolic troffers with integrated assembly for easy installation.

- High efficiency frosted polycarbonate lens
- Fits most standard housings
- 0-10V Dimming to 10%

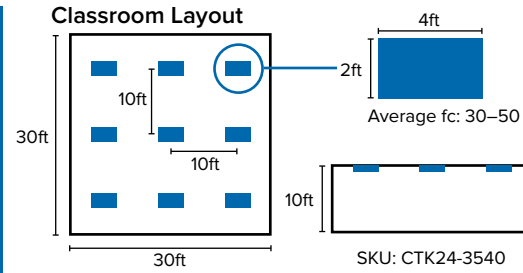

Fixture	Length	Width	Height	Weight
2'x2'	22.5 in.	22.5 in.	3.07 in.	3.9 lbs.
2'x4'	48 in.	22.5 in.	3.07 in.	6.4 lbs.

Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
2'x2'													
93123046	CTK22-2835	840141400143	2800	3500K	127	21	•	•		40	2 Lamp T8	PLC8I187J2HW	
93123047	CTK22-2840	840141400150	2800	4000K	127	21	•	•		40	2 Lamp T8	PLO29ODI5ZJ9	
93123044	CTK22-3335	840141400129	3300	3500K	124	25	•	•		40	2 Lamp T8	PLHJ5XR0LHI2	
93123045	CTK22-3340	840141400136	3300	4000K	124	25	•	•		40	2 Lamp T8	PLEQAMLGWAWC	
93123042	CTK22-4035	840141400105	4000	3500K	125	32	•	•		40	3 Lamp T8	PLABNOJ7ZJCN	
93123043	CTK22-4040	840141400112	4000	4000K	125	32	•	•		40	3 Lamp T8	PLY2YEJR6U3S	
2'x4'													
93123052	CTK24-2535	840141400204	2500	3500K	128	20	•	•		20	1 Lamp T8	-	
93123053	CTK24-2540	840141400211	2500	4000K	130	20	•	•		20	1 Lamp T8	-	
93123050	CTK24-3535	840141400181	3500	3500K	125	28	•	•		20	1 Lamp T8	PLCV00ZH9RX8	
93123051	CTK24-3540	840141400198	3500	4000K	125	28	•	•		20	1 Lamp T8	PL2HPYGGH4DE	
93123048	CTK24-4435	840141400167	4400	3500K	126	35	•	•		20	2 Lamp T8	PLTDFS3BF59U	
93123049	CTK24-4440	840141400174	4400	4000K	126	35	•	•		20	2 Lamp T8	PLV8R4XKDFMK	

RETROFIT

PRODUCT SELECTION GUIDE

		GOOD		BETTER	
		tradeSELECT™		Mid-Spec Retrofit Kit	
		CTK		SLK	
FEATURES	Sizes	2x2	2x4	2x2	2x4
		Yes	Yes	Yes	Yes
	CRI	80+		80+	
	CCT	3500K, 4000K		3000K, 3500K, 4000K, 5000K	
	SpectraSync™ Color Tuning Technology	-		2700K-5000K, 2700K-6500K	
	Switchable Technology	Switchable Lumen & CCT		-	
	Lumen Range	2551-4536		1545-6200	
	Dimming	0-10V Dimming to 10%		0-10V plus others	
	Emergency	Field Install		Yes	
	DTS (UL924 Bypass)	-		Yes	
Efficacy (maximum LPW)	130		141		
DLC® DesignLights Consortium	Standard & Premium		Premium		
Buy America(n) Solutions	-		TAA FAR §52.225-11		
INTEGRATED CONTROLS	Standalone Occupancy & Daylighting	-		Yes	
	NX Standalone Occupancy & Daylighting	-		Yes	
	NX Networked Occupancy & Daylighting	-		-	
USES	Applications	PowerHUBB™		-	
		Education, Healthcare, Office, Retail		Education, Healthcare, Office, Retail	


DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

CNW

NARROW WRAP

An attractive narrow wrap with decorative end caps and a polished look, suitable for many applications.

- Frosted acrylic lens
- Fully assembled for quick installation
- Efficient 4' LED narrow utility wrap
- 116 lumens per watt

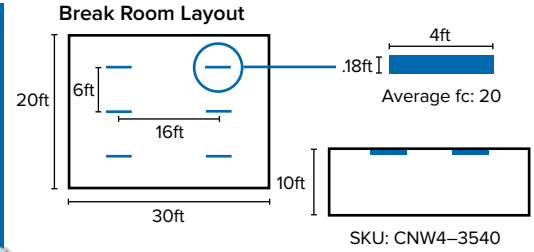

Length	Width	Height	Weight
47.6in.	5.3in.	2.1in.	4.08lbs.



Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
93123055	CNW4-3540	840141400235	3501	4000K	116	30	64	1 Lamp T8	-*


* Consult Factory

CWP

WRAP LUMINAIRE

Efficient general lighting solution with wide housing ideal for retrofit applications.

- Sturdy frosted acrylic lens
- Universal voltage, 120-277V
- 0-10V Dimming

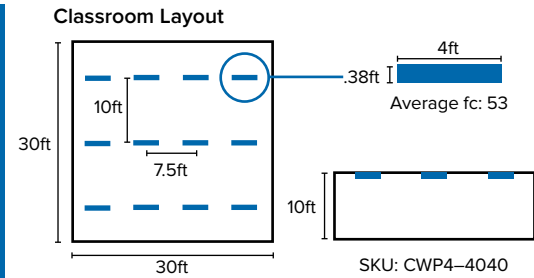

Length	Width	Height	Weight
48.0 in.	9.0 in.	4.5 in.	10.8 lbs.





Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
93075545	CWP4-4035	78531127480	4584	3500K	124	37	33	2 Lamp T8	PK3QCUC2
93075546	CWP4-4040	78531127497	4584	4000K	124	37	33	2 Lamp T8	PBX1ZHW2

CRW

ROUND WRAP

The CRW is a versatile round wrap with decorative end caps.

- Switchable Lumen and CCT technology
- Frosted acrylic lens
- Up to 153 lumens per watt
- 0-10V Dimming

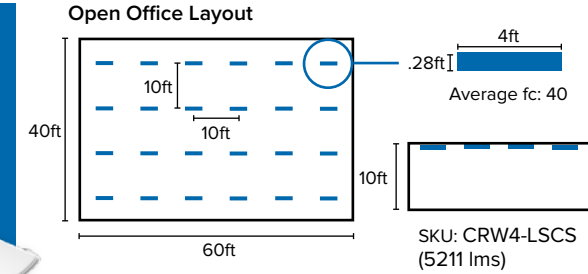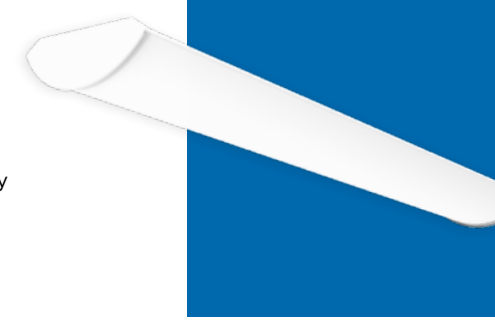

Length	Width	Height	Weight
46.0in.	9.7in.	3.4in.	6.83lbs.



Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
93123054	CRW4-LSCS	840141400228	5200, 4556, 3864	3500K	133, 136, 149	40	30	1 or 2 Lamp T8 or 1 Lamp T5HO	-*
			5240, 4590, 3892	4000K	141, 149, 160	27							
			5280, 4624, 3920	5000K	137, 145, 156	33							

* Consult Factory

CUC

COMMERCIAL LED UNDERCABINET

Sleek LED undercabinet luminaire with a variety of applications.

- Switchable CCT technology
- Durable polycarbonate lens
- Triac Dimming
- Direct wire or plug-and-play
- 120V



CUC4-ED120 Mounted at 20" from surface
Workspace desktop foot candles




Fixture	Length	Width	Fixture	Weight
CUC1	11.5in.	3.33in.	1.0in.	1.0lbs.
CUC2	23.5in.	3.33in.	1.0in.	1.9lbs.
CUC3	35.5in.	3.33in.	1.0in.	2.9lbs.
CUC4	47.5in.	3.33in.	1.0in.	3.5lbs.





Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Carton Qty	
							CA	GA	IL	NJ		
93124554	CUC1-CS-ED120	840141420387	443, 468, 444	3000/3500/4000K	61, 66, 62	7, 7, 7	4	
93124555	CUC2-CS-ED120	840141420394	896, 943, 910	3000/3500/4000K	62, 67, 63	15, 14, 15	4	
93124556	CUC3-CS-ED120	840141420400	1176, 1211, 1186	3000/3500/4000K	61, 65, 62	19, 19, 19	4	
93124557	CUC4-CS-ED120	840141420417	1628, 1666, 1627	3000/3500/4000K	25, 24, 25	66, 70, 66	4	
Accessories												
93097061	CUC-13CC	078531133634	-	-	-	-	10	
93097062	CUC-24CC	078531133641	-	-	-	-	10	
93097060	CUC-5F-120-CP	078531133627	-	-	-	-	10	

WRAPS

PRODUCT SELECTION GUIDE

		GOOD								
		tradeSELECT™  CNW			tradeSELECT™  CWP			tradeSELECT™  CRW		
		2'	4'	8'	2'	4'	8'	2'	4'	8'
FEATURES	Length	-	Yes	-	-	Yes	-	-	Yes	-
	Width	5.3"			9"			9.7"		
	Continuous Row	-			-			-		
	Lumens (maximum)	3507			4584			5880		
	Efficacy (maximum LPW)	116			124			153		
	Life Rating	54,000 hours @ L70			54,000 hours @ L70			54,000 hours @ L70		
	CRI	80+			80+			80+		
	CCT	4000K			4000K			3500K, 4000K, 5000K		
	SpectraSync™ Color Tuning Technology	-			-			-		
	SpectraSAFE™ Integrated Surveillance	-			-			-		
	Switchable Technology	-			-			Lumen & CCT		
	Lens	Frosted Acrylic			Frosted Acrylic			Frosted Acrylic		
	Dimming	0-10V Dimming to 10%			0-10V Dimming to 10%			0-10V Dimming to 10%		
	Emergency Battery Pack	-			-			-		
DLC® DesignLights Consortium	Standard			Standard			Premium			
Buy America(n) Solutions	-			-			-			
INTEGRATED CONTROLS	Standalone Occupancy & Daylighting	-			-			-		
	NX Standalone Occupancy & Daylighting	-			-			-		
	NX Networked Occupancy & Daylighting	-			-			-		
	PowerHUBB™	-			-			-		
USES	Applications	Education, Office, Retail, Warehouse			Education, Healthcare, Office, Warehouse			Education, Healthcare, Office, Retail, Warehouse		

DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

		BETTER			BEST		
		Mid-Spec Wrap  LAW			High-Spec Wrap  RLW		
		2'	4'	8'	2'	4'	8'
FEATURES	Length	Yes	Yes	-	Yes	Yes	Yes
	Width	8.31"			8.5"		
	Continuous Row	-			Yes		
	Lumens (maximum)	7263			14,711		
	Efficacy (maximum LPW)	125			144		
	Life Rating	60,000 hours @ L80			60,000 hours @ L80		
	CRI	80+			80+, 90		
	CCT	3000K, 3500K, 4000K, 5000K			3000K, 3500K, 4000K, 5000K		
	SpectraSync™ Color Tuning Technology	-			Yes		
	SpectraSAFE™ Integrated Surveillance	-			Yes		
	Switchable Technology	-			-		
	Lens	Acrylic, Frosted Overlay			Frosted Acrylic		
	Dimming	0-10V Dimming to 1% and Dim to Dark			0-10V Dimming to 1% and Dim to Dark		
	Emergency Battery Pack	Yes			Yes		
DLC® DesignLights Consortium	Standard			Standard			
Buy America(n) Solutions	-			TAA FAR §52.225-11			
INTEGRATED CONTROLS	Standalone Occupancy & Daylighting	-			Yes		
	NX Standalone Occupancy & Daylighting	-			Yes		
	NX Networked Occupancy & Daylighting	-			-		
	PowerHUBB™	-			Yes		
USES	Applications	Education, Healthcare, Office, Warehouse			Education, Healthcare, Office, Retail, Warehouse		





CSL

LENSED STRIPLIGHT

The CSL is an attractive narrow striplight with LED technology and a wide range of applications.

- Frosted acrylic lens
- Surface or suspended mount
- Fully assembled for quick installation
- Universal voltage, 120-277V
- 0-10V Dimming

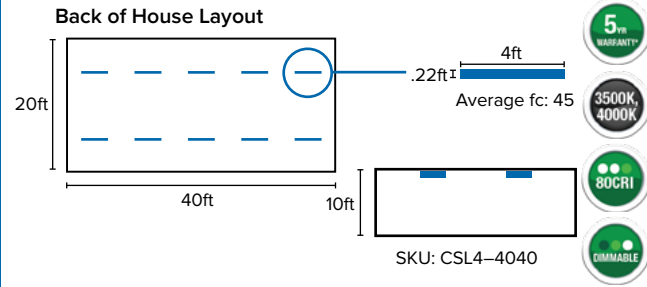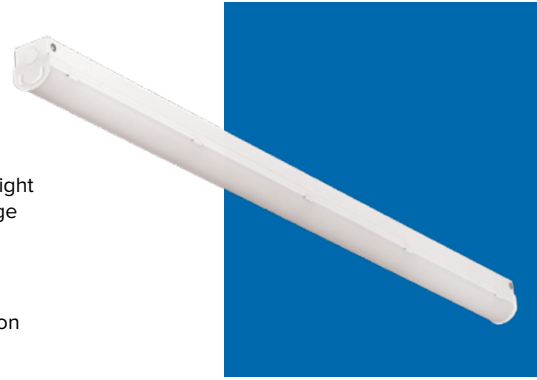

- 5 yr WARRANTY
- 3500K, 4000K
- 80CRI
- DIMMABLE




Fixture	Length	Width	Height	Weight
4'	48.0in.	2.25in.	2.69in.	4.9lbs.
8'	95.9in.	2.25in.	2.69in.	10.8lbs.

Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
4'													
93075541	CSL4-4035	78531127442	4231	3500K	105	40	•	•	•	•	120	2 Lamp T8	PTH54URX
93075542	CSL4-4040	78531127459	4517	4000K	112	40	•	•	•	•	120	2 Lamp T8	PFA16VH6
8'													
93075543	CSL8-8035	78531127466	8460	3500K	105	80	•	•	•	•	120	4 Lamp T8	P67H7F6G
93075544	CSL8-8040	78531127473	9036	4000K	112	80	•	•	•	•	120	4 Lamp T8	PGUEY5Z6




STRIPS

PRODUCT SELECTION GUIDE

		GOOD			BETTER						
		tradeSELECT [®]			Mid-Spec Strip			Mid-Spec Strip			
											
		CSL			LCS			LCL			
		2'	4'	8'	2'	4'	8'	2'	4'	8'	
FEATURES	Length	–	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	Continuous Row	–			–			–			
	Lumens (maximum)	4584			23,274			21,354			
	Efficacy (maximum LPW)	124			153			144			
	Lens	Frosted Acrylic			None			Frosted Acrylic			
	Emergency Battery Pack	–			Yes			Yes			
	CRI	80+			80+			80+			
	SpectraSAFE™	–			–			–			
	SpectraSync™ Color Tuning Technology	–			–			–			
	DLC® DesignLights Consortium	Standard			Premium			Premium			
Buy America(n) Solutions	–			–			TAA FAR §52.225-11				
INTEGRATED CONTROLS	Standalone Occupancy & Daylighting	–			–			–			
	NX Standalone Occupancy & Daylighting	–			–			–			
	NX Networked Occupancy & Daylighting	–			–			–			
	PowerHUBB™	–			–			–			
USES	Applications		Education, Healthcare, Office, Retail, Industrial			Education, Healthcare, Office, Retail, Industrial Yes			Education, Healthcare, Office, Retail, Industrial		

DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

BEST			
High-Spec Strip			
			
MPS			
2'	4'	8'	
Yes	Yes	Yes	
Yes			
17,490			
148			
None, Frosted Acrylic, Polycarbonate			
Yes			
80+/90			
Yes			
Yes			
Premium			
TAA FAR §52.225-11			
Yes			
Yes			
Yes			
Yes			
Education, Healthcare, Office, Retail, Industrial			





MPS

CVT VAPORTITE

A narrow body linear vaportite that offers Switchable Lumen outputs and multiple mounting options for easy installation in both retrofits and new construction.

- IP65/66 rated
- Up to 161 lumens per watt
- -40°C to 40°C
- Switchable Lumen technology
- Universal voltage, 120-277V
- 0-10V Dimming to 10%

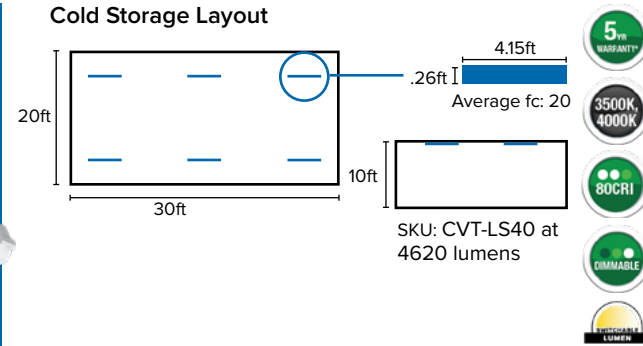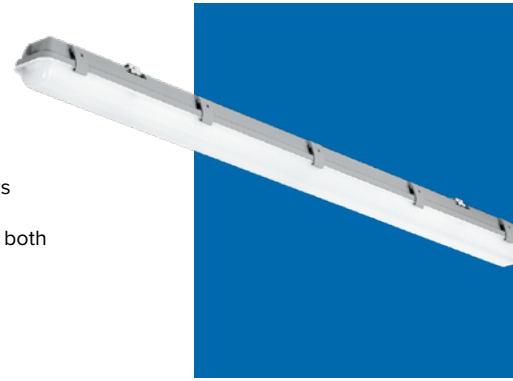

- 5 yr WARRANTY
- 3500K / 4000K
- 80CRI
- DIMMABLE
- 161 LUMEN

Length	Width	Height	Weight
49.8in.	3.4in.	3.4in.	4.4lbs.

Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
93123404	CVT4-LS40	840141400242	7000, 5800, 4500	4000K	155, 158, 160	48, 38, 29	•	•		24	3, 2, 2 T8 Lamp	PZF65FVJ	
93123405	CVT4-LS50	840141400259	7000, 5800, 4500	5000K	152, 154, 158	48, 38, 29	•	•		24	3, 2, 2 T8 Lamp	POZKQ7HN	




VAPORTITE

PRODUCT SELECTION GUIDE

	GOOD			BETTER					
	tradeSELECT [®]			Mid-Spec Vaportite			Mid-Spec Vaportite		
	CVT			LXEN			LXEM		
	2'	4'	8'	2'	4'	8'	2'	4'	8'
	Length	-	Yes	-	-	Yes	Yes	Yes	Yes
Certifications	IP65, IP66, Wet Location			IP65, IP66, IP67, Wet Location, UL Sanitation			IP65, IP66, IP67, Wet Location, UL Sanitation, IK10 with polycarbonate lens		
Lumens Range (Switchable)	4620-7460			2000-4300			2145-22,473		
Efficacy (maximum LPW)	29-48			111-116			96-143		
Mounting Height	8'-12'			8'-10'			8'-20'		
Lens	Ribbed Frosted Polycarbonate			Ribbed Frosted Acrylic			Ribbed Frosted Acrylic, Ribbed Clear Acrylic, Deep Frosted Acrylic, Deep Clear Acrylic, Ribbed Frosted Polycarbonate, Ribbed Clear Polycarbonate		
Dimming	Yes			Yes			Yes		
Emergency	-			-			Yes		
CRI	80+			80+			80+		
CCT	4000K, 5000K			3000K, 3500K, 4000K, 5000K			3000K, 3500K, 4000K, 5000K		
Temperature Range	-40°C to 40°C			-20°C to 50°C			-20°C to 50°C		
Switchable Technology	Switchable Lumen			-			-		
Buy America(n) Solutions	-			TAA FAR §52.225-11			TAA FAR §52.225-11		
DLC[®] DesignLights Consortium	Premium			Standard			Premium		
Applications	Education, Healthcare, Industrial, Cold Storage, Food Processing, Parking Garage			Education, Healthcare, Industrial, Cold Storage, Food Processing, Parking Garage			Education, Healthcare, Industrial, Cold Storage, Food Processing, Parking Garage		

DLC[®] (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org

BETTER					
Mid-Spec Vaportite			Mid-Spec Vaportite		
LXEW			LXEP		
2'	4'	8'	2'	4'	8'
-	Yes	-	Yes	Yes	Yes
IP65/67/66, Wet Location, UL Sanitation			IP65/67/66, Wet Location, UL Sanitation		
11,079-38,228			2960-19,700		
105-137			88-116		
20'-40'			8'-10'		
Frosted Impact Resistance Acrylic, Clear Impact Resistance Acrylic, Clear UV Stabilized Polycarbonate			Deep Frosted Acrylic, Deep Clear Acrylic		
Yes			Yes		
Yes			Yes		
80+			80+		
3000K, 3500K, 4000K, 5000K			3000K, 3500K, 4000K, 5000K		
-20°C to 50°C			-20°C to 50°C		
-			-		
TAA FAR §52.225-11			-		
Premium			Standard		
Education, Healthcare, Industrial, Cold Storage, Food Processing, Parking Garage			Parking Garage		

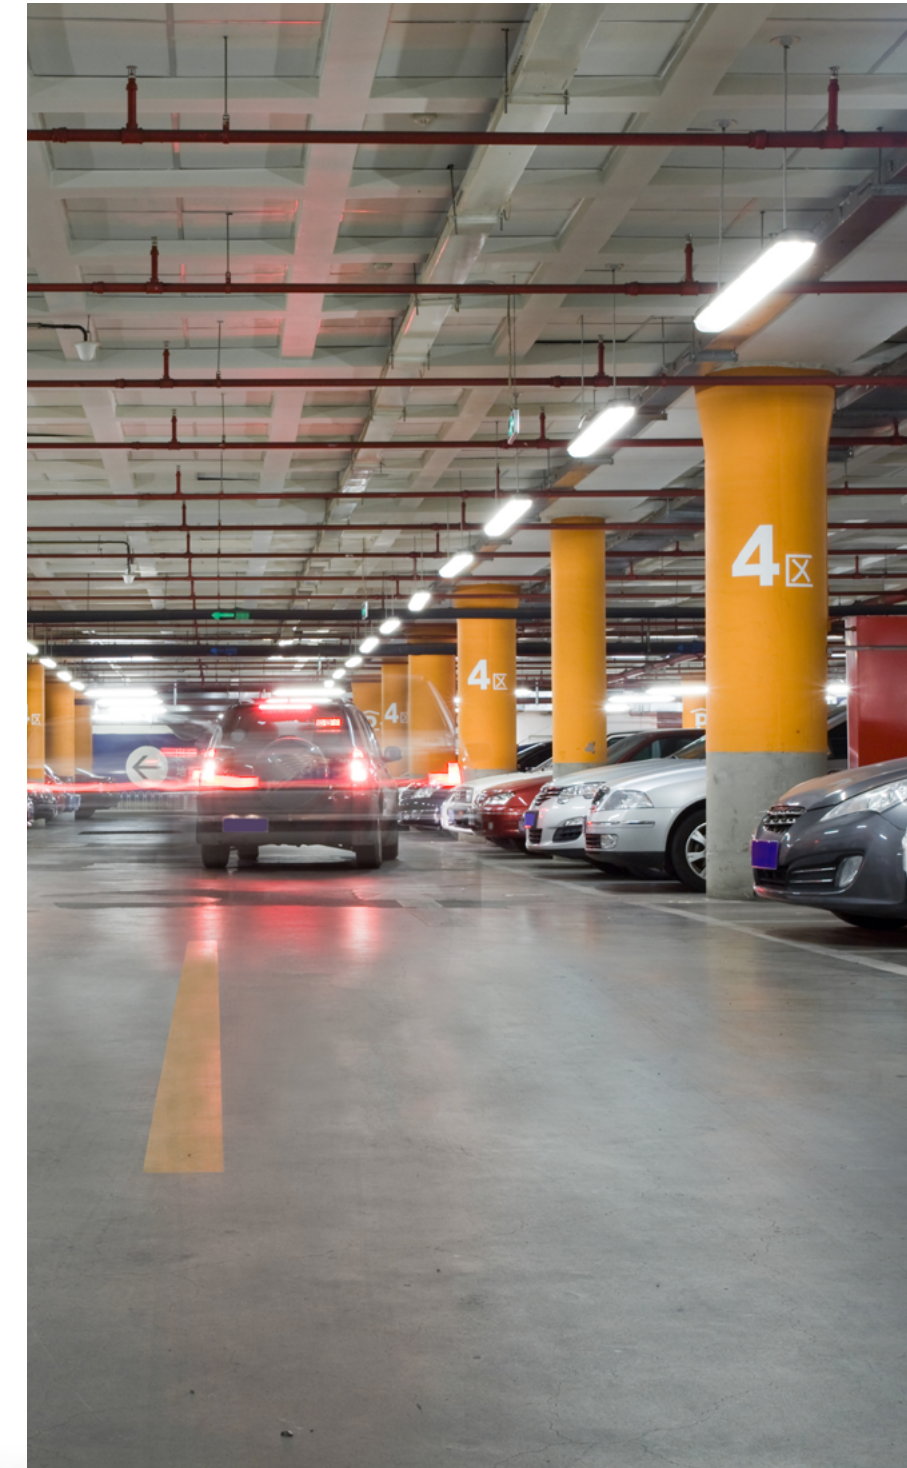


CLB

LINEAR HIGH BAY

The CLB is an efficient linear highbay suitable for a variety of areas including warehouses, gyms, and industrial spaces.

- Frosted polycarbonate lens—IK10 impact rated
- IP4X Rated
- 6kV surge protection
- Up to 158 lumens per watt
- -40°C to 50°C
- 0–10V dimming to 10%
- Universal Voltage 120–277V

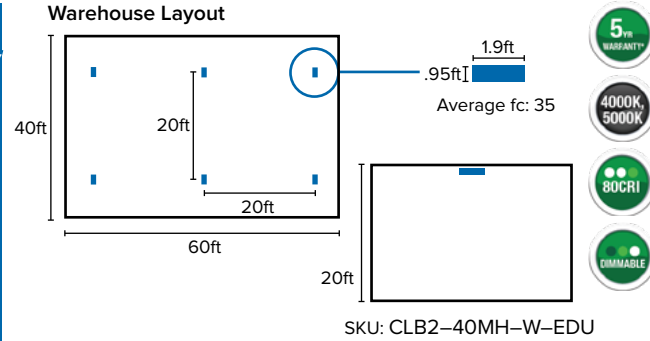

- 5 yr WARRANTY
- 4000K, 5000K
- 80CRI
- DIMMABLE

Fixture	Length	Width	Height	Weight
LX, MM	22 1/16 in.	10 in.	2 5/16 in.	5.8 lbs.
MH	22 1/16 in.	10 in.	2 5/16 in.	6.2 lbs.
MV	22 1/16 in.	14 1/16 in.	2 5/16 in.	9.6 lbs.
MX	43 1/8 in.	10 in.	2 5/16 in.	10.5 lbs.
HM	43 1/8 in.	10 in.	2 5/16 in.	12.4 lbs.
HH	43 1/8 in.	14 1/16 in.	2 5/16 in.	18.83 lbs.

Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Stock Locations				Pallet Qty	Equivalency	DLC Listing
							CA	GA	IL	NJ			
93133326	CLB2-40LX-W-EDU	840141402871	10,527	4000K	139	75.9	78	4 Lamp T8	PL6V0UBASM2L
93133333	CLB2-50LX-W-EDU	840141402949	10,477	5000K	142	73.7	78	4 Lamp T8	PL8UGF53K5DY
93133327	CLB2-40MM-W-EDU	840141402888	15,091	4000K	151	100.2	78	6 Lamp T8	PL8KD4HFZGL1
93133334	CLB2-50MM-W-EDU	840141402956	13,717	5000K	139	98.9	78	6 Lamp T8	PLMOUNY6HUBH
93133328	CLB2-40MH-W-EDU	840141402895	20,831	4000K	135	153.9	78	6 Lamp T8	PL7FUT52HFUY
93133335	CLB2-50MH-W-EDU	840141402963	22,297	5000K	150	148.7	78	6 Lamp T8	PLYE2WFMYT6C
93133329	CLB2-40MV-W-EDU	840141402901	26,364	4000K	138	191.2	52	6 Lamp T5HO	PLOI8O6DN40G
93133336	CLB2-50MV-W-EDU	840141402970	29,674	5000K	148	201.0	52	6 Lamp T5HO	PLFEWT7AA4Z1
93133330	CLB4-40MX-W-EDU	840141402918	35,051	4000K	145	240.9	39	6 Lamp T5HO	PLEVB9Q6JSID
93133337	CLB4-50MX-W-EDU	840141402987	37,145	5000K	154	242.0	39	6 Lamp T5HO	PLCTB0Y2MJR3
93133331	CLB4-40HM-W-EDU	840141402925	42,810	4000K	143	299.0	39	8 Lamp T5HO	PLUAK4BA0QRI
93133338	CLB4-50HM-W-EDU	840141402994	44,006	5000K	146	301.6	39	8 Lamp T5HO	PLDLAKIQAB7F
93133332	CLB4-40HH-W-EDU	840141402932	57,047	4000K	147	388.2	52	8 Lamp T5HO	PLDSM0CGLRQB
93133339	CLB4-50HH-W-EDU	840141403007	55,637	5000K	141	393.7	52	8 Lamp T5HO	PL2DC31EJ7F7

LINEAR HIGH BAY

PRODUCT SELECTION GUIDE

		GOOD		BEST	
		tradeSELECT [®]		High-Spec Linear High Bay	
		CLB		PEL	
		2'	4'	2'	4'
	Length	Yes	Yes	Yes	Yes
	Mounting Height	Up to 60'		Up to 60'	
	Lumens (maximum)	10,000- 57,000		8000–60,000	
	Efficacy (maximum LPW)	137–158		146–177	
	CRI	80		80+	
	CCT	4000K, 5000K		3000K, 3500K, 4000K, 5000K	
	Wattage	75–388W		50–410W	
	Voltage	120–277, 347–480*		120–277V, 347V, 480V	
	Distribution	Wide, Narrow*		Narrow, Wide, Lambertian	
	Lens	Polycarbonate		No Lens, Acrylic, Polycarbonate	
	Uplight	No		Yes	
	Temperature Range	-40° to 50° C		-40°C to 65°C	
	Dimming	0-10V Dimming to 10%		0–10V Dimming to 5%	
	Ratings	Damp Location, IP4X, IK10 Impact		Damp Location	
	Emergency Battery Pack	15W*		10W, 20W	
	Equivalency	100W to 1000W HID & 4-lamp T8, 8-lamp T5HO		100W to 1000W HID & 4-lamp T8, 8-lamp T5HO	
	DLC[®] DesignLights Consortium	Yes		Yes	
	Buy America(n) Solutions	–		TAA FAR §52.225-11	
INTEGRATED CONTROLS	Standalone Occupancy & Daylighting	Yes*		Yes	
	NX Standalone Occupancy & Daylighting	–		Yes	
	NX Networked Occupancy & Daylighting	–		Yes	
	PowerHUBB[™]	–		–	
USES	Applications	Industrial, Gymnasium, Warehouse, Big Box Retail		Industrial, Gymnasium, Warehouse, Big Box Retail	

DLC[®] (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org


*Available as MTO Option, coming Q2 2021

CRN2

WET LOCATION HIGH BAY

An efficient wet location high bay offers lumen packages from 14,000 to 38,000 for proper illumination on a variety of high bay applications.

- Frosted polycarbonate lens standard
- Clear acrylic, spun aluminum, and diffuse acrylic reflector options
- Up to 144 lumens per watt
- Wet Location, IP66, & IK10 Impact Rated
- 6' power cord standard
- Universal Voltage, 120–277V

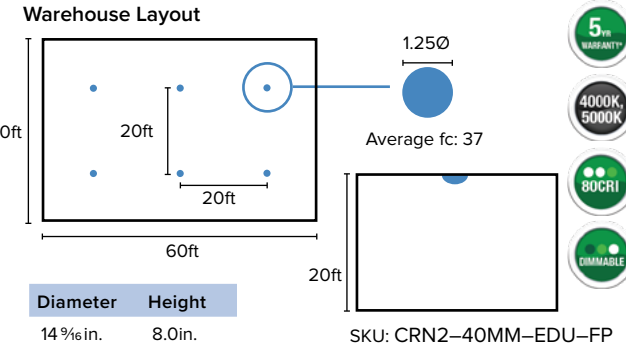

- 5 yr WARRANTY
- 4000K, 5000K
- 80CRI
- DIMMABLE


Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Weight	Stock Locations				Pallet Qty	Equivalency	DLC Listing
								CA	GA	IL	NJ			
93130226	CRN2-40LX-EDU-FP	840141400372	14444	4000K	144	100	9.4lbs.	•	•		20	250W MH	PLD4D9C4TT12	
93130227	CRN2-50LX-EDU-FP	840141400389	14444	5000K	144	100	9.4lbs.	•	•		20	250W MH	PLMXW9SIH9GO	
93130228	CRN2-40MM-EDU-FP	840141400396	21702	4000K	144	150	9.9lbs.	•	•		20	400W MH	PL0SB3M6IM8M	
93130229	CRN2-50MM-EDU-FP	840141400402	21702	5000K	144	150	9.9lbs.	•	•		20	400W MH	PLQFEIJXTEXO	
93130230	CRN2-40MV-EDU-FP	840141400419	27856	4000K	139	200	10.2lbs.	•	•		20	750W MH	PLVGLQK2PPY7	
93130231	CRN2-50MV-EDU-FP	840141400426	27856	5000K	139	200	10.2lbs.	•	•		20	750W MH	PL20WICFYC2B	
93130232	CRN2-40MX-EDU-FP	840141400433	34202	4000K	139	245	11lbs.	•	•		20	750W MH	PLD3J1K70V78	
93130233	CRN2-50MX-EDU-FP	840141400440	34202	5000K	139	245	11lbs.	•	•		20	750W MH	PL21IBZS1WPP	
93130234	CRN2-40HM-EDU-FP	840141400457	37927	4000K	140	270	11.5lbs.	•	•		20	1000W MH	PLBPSWQ730FZ	
93130235	CRN2-50HM-EDU-FP	840141400464	37927	5000K	140	270	11.5lbs.	•	•		20	1000W MH	PLDWQWFO8QQV	
Accessories														
93097503	CRNAL18	785988043002	–	–	–	–	1.7lbs.	•	•		–	–	–	
93097504	CRNWA18	785988043019	–	–	–	–	3.3lbs.	•	•		–	–	–	
93097502	CRNWW18	785988042999	–	–	–	–	3.3lbs.	•	•		–	–	–	

CRB

WET LOCATION HIGH BAY

CRB is a compact wet location round highbay suitable for a variety of bay lighting applications including mezzanines and garden centers.

- Durable die-cast aluminum housing and polycarbonate lens
- Lumen packages from 14,000–34,000
- Up to 143 lumens per watt
- Wet Location, IP66, & IK07 Impact Rated
- 4000K and 5000K options and 80 CRI
- -30°C to 50°C ambient operating temperature range

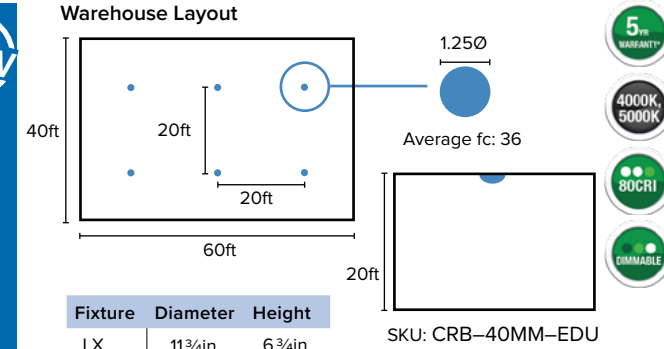




- 5 yr WARRANTY
- 4000K, 5000K
- 80CRI
- DIMMABLE

Part #	Catalog #	UPC	Lumens	CCT	LPW	Watts	Weight	Stock Locations				Pallet Qty	Equivalency	DLC Listing
								CA	GA	IL	NJ			
93130916	CRB-40LX-EDU	840141401461	14107	4000K	139	100	6.6lbs.	6.6	•		60	250W MH	PLHP30JW8L5Q	
93130917	CRB-40MM-EDU	840141401478	21349	4000K	140	150	6.7lbs.	6.7	•		60	400W MH	PLA8SQ7ISZNI	
93130918	CRB-40MV-EDU	840141401485	28739	4000K	143	200	9.5lbs.	9.5	•		30	750W MH	PLD9DM1993AW	
93130919	CRB-40MX-EDU	840141401492	34603	4000K	143	240	9.9lbs.	9.9	•		30	750W MH	PL364AKTVQ2B	
93130920	CRB-50LX-EDU	840141401508	14107	5000K	139	100	6.6lbs.	6.6	•		60	250W MH	PLBL6OYBSP4C	
93130921	CRB-50MM-EDU	840141401515	21349	5000K	140	150	6.7lbs.	6.7	•		60	400W MH	PLIMNBGRXCMZ	
93130922	CRB-50MV-EDU	840141401522	28739	5000K	143	200	9.5lbs.	9.5	•		30	750W MH	PLE3JEJHZOII	
93130923	CRB-50MX-EDU	840141401539	34603	5000K	143	240	9.9lbs.	9.9	•		30	750W MH	PLDZLCKFOU1R	

ROUND HIGH BAY

PRODUCT SELECTION GUIDE

		GOOD		BETTER
		tradeSELECT [®]  CRB		tradeSELECT [®]  CRN2
				Mid-Spec Round High Bay  UTB2
FEATURES	Diameter	11.75" 14.13"	14.56"	16"
	Mounting Height	Up to 40'		Up to 40'
	Lumens (maximum)	14,000–34,000		12,000–30,000
	Efficacy (maximum LPW)	139–143		106–162
	CRI	80		80+
	CCT	4000K, 5000K		3000K, 3500K, 4000K, 5000K
	Wattage	100–240W		84–190W
	Voltage	120–277V		120–277V, 120V, 208V, 240V, 277V, 347V, 480V
	Distribution	–		Reflector: Clear Acrylic, Translucent White, Suspended Bead, Anodized Aluminum, No Optic
	Lens	Glass, Frosted Polycarbonate		Conical Drop Lens Dropped Lens Refractor, Frosted Acrylic Lens, None
	Temperature Range	-30°C to 50°C		-35°C to 65°C
	Dimming	0–10V Dimming to 10%		0–10V Dimming to 10%
	Ratings	Wet Location, IP66, IK07 Impact		Damp Location
	Emergency Battery Pack	25W Field Installable		10W
Equivalency	250W to 750W HID		175W to 750W HID	
DLC [®] DesignLights Consortium	Yes		Yes	
INTEGRATED CONTROLS	Standalone Occupancy & Daylighting	–		Yes
	NX Standalone Occupancy & Daylighting	–		Yes
	NX Networked Occupancy & Daylighting	–		Yes
	PowerHUBB [™]	–		–
USES	Applications	Industrial, Gymnasium, Warehouse, Big Box Retail, Garden Center	Industrial, Gymnasium, Warehouse, Big Box Retail, Garden Center	Industrial, Gymnasium, Warehouse, Big Box Retail

DLC[®] (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at www.designlights.org