

 **CLIMPLIGHT**[®]

by **DIVERSITECH**[®] 

PRODUCT CATALOG

A large, abstract graphic composed of several overlapping, flowing, red ribbon-like shapes that curve and swirl across the bottom half of the page. The shapes have a gradient from dark red to bright red, giving them a three-dimensional, liquid appearance.

SUPER SEAL FLEX INJECT®

STOPS LEAKS PERMANENTLY

FASTEST - EASIEST - PROVEN

DiversiTech® introduces Super Seal Flex Inject , a NEW refrigerant leak sealant solution that will save both Contractors and Home Owners time and money!



3X SEALING POWER

Patent pending Flex Inject® triple power sealant is the fastest, most effective proven way to permanently seal and prevent air conditioning and refrigeration (HVAC/R) leaks



NO TOOLS REQUIRED

Flex Inject® installs in seconds - no tools or gauges required. The Flex Inject® sealant goes to work immediately traveling through the system with both the oil and refrigerant stopping leaks dead in their tracks.

FULLY COMPATIBLE

COMPATIBLE WITH ALL OILS & REFRIGERANTS

Works with all compressors, heat pumps, condensers, recovery units, and other system components. Will not plug up manifold gauges, TXVs, pistons or cap tubes. Compatible with all oils and refrigerants including R-410A requiring no pump down or recovery.



POLYMER FREE

The polymer free formula has unique metal bonding properties that create a permanent protective barrier to keep the refrigerant from escaping and is microchannel friendly.



Part #985
Patent Pending

ALL SYSTEMS | UP TO 20KW

UP TO 6 TONS

Learn more about Flex Inject at www.diversitech.com/flexinject



Super Seal Flex Inject®



**No manifold gauge
or hoses needed
Just Connect HI & LOW -
PUSH TO GO!**

QUICK & EASY INSTALLATION: INSTALL INTO FULLY-CHARGED SYSTEM

1. Ensure system is running.
2. Connect the red push button valve to the high side service port.*
3. Connect the blue low loss fitting to the low side service port.
4. Remove puck and press red button for 3 to 5 seconds to inject sealant.
5. Once sealant is dispensed, disconnect red push button valve from system.
6. Remove blue low loss fitting from system.

NO SYSTEM RUN TIME REQUIRED AFTER INJECTION

*IF NO HIGHSIDE PORT IS AVAILABLE - ATTACH RED PUSH BUTTON VALVE TO A REFRIGERANT CYLINDER & FOLLOW STEPS 3-6.

FREE MERCHANDISER AVAILABLE*



**While
Supplies
Last**

ITEM# MKT-MERCH-FLEX

WHY SUPER SEAL FLEX INJECT IS THE OBVIOUS CHOICE

Feature	DiversiTech Super Seal Flex Inject®	Nu-Calgon EasySeal Direct Inject
Sealant Power	Triple	Single
Hose	Flexible	Rigid
Equipment Required	None	Manifold Gauge and Hoses
Sealant-Refrigerant Integration	No Run Time Required	60 Minutes with System Running
Valve Protection	Push Button Valve Allows for a Controlled Refrigerant Flow with Automatic Shut Off	One Way Check Valve
Compressor Protection	Misting Orifice Prevents Liquid Slugging	None

REFRIGERANT LEAK SEALANT SOLUTION PART NUMBER CONVERSION TABLE

DiversiTech		Nu-Calgon	
PRODUCT	PART #	PRODUCT	PART #
Super Seal Flex Inject® with Integrated Hose - Up to 6 tons	985	EasySeal-SS Direct Inject – Fractional to 1.5 tons	4050-05
		EasySeal Direct Inject – 6 pc. BULK – 1.5 to 5 tons	4050-07
		EasySeal Direct Inject – 1.5 to 5 tons	4050-08

*REQUIRES TWO SIX PACK ORDERS AT TIME OF PURCHASE; LIMITED TO 200

INDEX

FLEX INJECT® 2 & 3

SUPER CHANGE™ 5

SUPER SEAL ADVANCED™ & TOTAL™ 6 & 7

SUPER SEAL SURE SHOT™ 8 & 9

SEAL-N-GO™ 10

FLASH™, UV KITS & INSPECTION LIGHTS 11

DRY R™ 12

LED WORKLIGHTS 13 & 14

SERVICE TOOLS..... 15

CHEMICAL SOLUTIONS THAT WORK



SUPER CHANGE™

FAST & EASY R22 SYSTEM RETROFIT

- Eliminates oil change out
- Replaces R22 line set conversion flush
- Ideal for dry charged units, retrofits, & drop-in refrigerants
- Maximizes oil return & heat transfer, including POE charged compressors

HOW DOES SUPER CHANGE™ WORK?

SUPER CHANGE™ creates a strong compatibility link between all oils to any HFC refrigerants, including POE-based R407C & R410A – eliminating compressor downtime & line set flush. It boosts efficiency plus extends compressor life by maximizing heat transfer & oil return with drop-in refrigerants.



Compatible



Eliminates Moisture



Equipment Safe



Boosts Efficiency

ADDED BENEFITS

- Reduces oil logging – critical in systems with long line set runs & rises
- Introduces antioxidants to reduce corrosion & restore lubricants
- Rejuvenates O-rings & gaskets – no change out required
- Required hose sold separately



20122
REUSABLE HOSE SOLD SEPARATELY



SOLD AS
6 PACK
COUNTER
DISPLAY



981*
ALL SYSTEMS UP TO 6 TONS

APPLICATION GUIDE

SYSTEM TONNAGE	Up to 3 Tons	3.5 - 6 Tons	6+ Tons
SYSTEM OIL CHARGE	Up to 32 oz	Up to 64 oz	128+ oz
Conversion not requiring oil change out	1 can	1 can	2 cans/gallon
Conversion requiring oil change out	1 can	2 cans	4 cans/gallon
Conversion to R410A	1 can	1 can	2 cans/gallon
R22 line set conversion flush	1 can	1 can	2 cans/gallon
For oil logging or long line set runs and rises	1 can	1 can	2 cans/gallon

It will take approximately 24 hours of operation for the full effect to be achieved.

Full FAQs available at cliplight.com

SUPER SEAL **ADVANCED**[™]

AC/R STOP LEAK + DRY R[™]



- Fast install – no pump down or recovery, even on R410A
- Ideal for all systems including microchannel, heat pump, & geothermal
- DRY R[™] eliminates moisture & increases efficiency
- Compatible with all oils & refrigerants



947KIT* SMALL SYSTEMS
UP TO 1.5 TONS | 5 KW



944KIT* MEDIUM SYSTEMS
1.5-5 TONS | 5-17 KW



948KIT* LARGE SYSTEMS
5+ TONS | 17+ KW

Reduce callbacks & prevent refrigerant loss with the industry's most trusted AC/R stop leak.

Used exclusively by AMTRAK, FORD, SEARS & more.



Permanent + Prevents Leaks



Eliminates 20 Drops of Water



Equipment Safe



Clear Hose Included

SUPER SEAL ADVANCED[™] & TOTAL[™] are engineered to meet ARI 700 purity standards. They are the only industry sealants that contain **DRY R[™]** to eliminate 20 drops of water, prevent acid/waxing, dissolve blockages, and free up TXVs.

SUPER SEAL TOTAL™ AC/R STOP LEAK + DRY R™ & FLASH™



- All the benefits of SUPER SEAL ADVANCED™
+ FLASH™ UV dye to find larger leaks




971KIT* SMALL SYSTEMS
UP TO 1.5 TONS | 5 KW



972KIT* MEDIUM SYSTEMS
1.5-5 TONS | 5-17 KW
APPLY SECOND CAN FOR SYSTEMS
5+ TONS | 17+ KW

NEW CLEAR HOSE ADVANTAGE See the can empty!

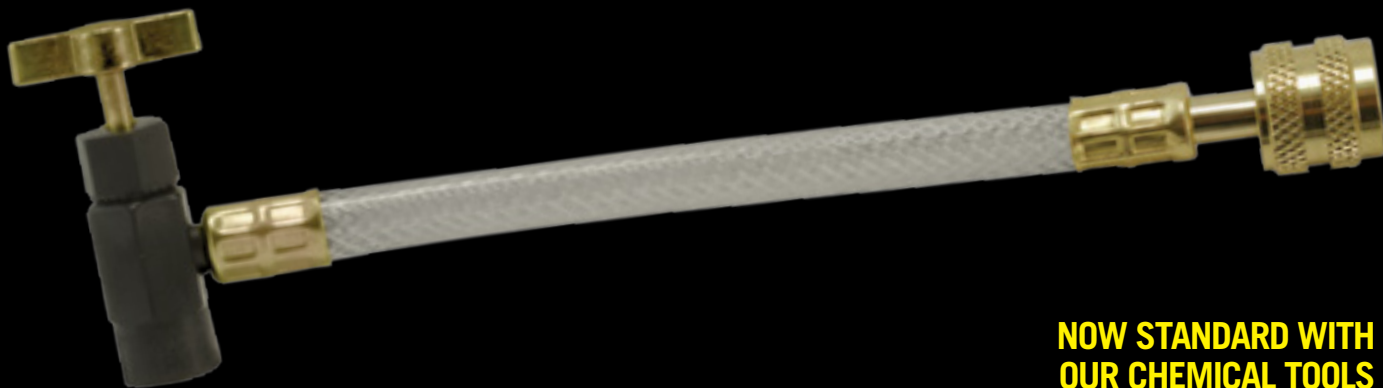

**NOW STANDARD WITH
OUR CHEMICAL TOOLS**

SUPER SEAL

SURE SHOT™

AC/R STOP LEAK + ECO BOOST

2 **IN** 1

SURE SHOT™ is a compressor-friendly method of permanently sealing leaks in AC/R systems. Eco Boost reduces noise and energy consumption, extends compressor life, plus eliminates 10 drops of water. It also enhances sealant performance, increases drier efficiency, while preventing acid/waxing formation.

APPLICATION GUIDE:

- Up to 1.5 tons - ½ syringe
- 1.5 – 6 tons - 1 syringe
- 6+ tons - additional syringe for every 64 ounces of systems oil



983KIT*
KIT WITH HOSE
ALL SYSTEMS UP TO 6 TONS

The NEW little brother in the SUPER SEAL™ stop leak family.

SURE SHOT™ is built on the same platform as SUPER SEAL ADVANCED™ and is well-suited to seal & prevent leaks in domestic refrigerators, mini-splits, & residential units. On smaller units, one syringe can be split between two systems.

SUPER SEAL
SURE SHOT™
 AC/R STOP LEAK + ECO BOOST



- Permanently seals & prevents leaks in AC/R systems
- Eco Boost reduces noise & eliminates moisture
- Polymer-free, compatible with all oils & refrigerants



Permanent + Prevents Leaks



Eliminates 10 Drops of Water



Equipment Safe



Clear Hose Included (983KIT)



940*
 REUSABLE HOSE & BLEEDER



984*
 REPLACEMENT SYRINGE

**AC/R STOP LEAK
 + ECO BOOST**
 SEAL, DRY & REDUCE NOISE



*ALL PRODUCTS ARE COVERED BY: US AND/OR CA AND/OR FOREIGN PATS. AND/OR PATS. PENDING FOR PRODUCTS, METHOD OF USE AND/OR SYSTEM INCORPORATING PRODUCT, CLIPLIGHT.COM

SEAL-N-GO™

SELF-SEALING REFRIGERANT™

410A + SUPER SEAL ADVANCED™



9410SSR*

HOW DOES SEAL-N-GO WORK?

SEAL-N-GO™ makes charging 410A systems faster & easier than ever. Portable, easy to handle, self-sealing refrigerant, permanently seals & prevent leaks.

ADDED BENEFITS

- Light-weight, compact, portable
- Tops off multiple systems
- Perfect for mini-split installs
- Permanently seals & prevent leaks
- Eliminates moisture

FAST - EASY - 1 STEP
push button application



Reusable charging hose with easy-to-read gauge sold separately. 20133*



Self-Sealing
Refrigerant



Eliminates
Moisture



Time Saver



Equipment
Safe

FLASH™ HIGH-RES, NO-MESS UV DYE

- Flashes into refrigerant as mist for instant distribution
- Highly stable – will not react with moisture
- Fastest dye – search for leaks in minutes
- Compatible with all oils & refrigerants

HOW DOES FLASH™ WORK?

FLASH™ is an advanced class of highly concentrated ultra violet dye that uses DRY R™ instead of POE oil as its carrier. This, combined with our patented misting orifice, enables the dye to travel at the speed of the refrigerant while keeping the dye stable. One can treats up to 64 oz | 1.8 L of oil. Required hose sold separately.

NO MESS

FLASH™ uses the system's refrigerant as the propellant – creating a clean, no-mess injection every time.



Compatible



Equipment Safe



Time Saver



20122
REUSABLE HOSE SOLD SEPARATELY

980*
ALL SYSTEMS UP TO 5 TONS | 17 KW
APPLY SECOND CAN FOR SYSTEMS
5+ TONS | 17+ KW

FLASH™ UV LEAK DETECTION KITS

- 3 cans of FLASH™ dye
- Reusable clear hose
- Heavy-duty storage case
- Choice of UV light

98084KIT* - MINI PRO 84 - SEEKERmini™ included

98087KIT* - MAXI PRO 87 - SEEKERmax™ included

NO UV ENHANCING GLASSES NEEDED



SEEKERmini™

84DCPLUS*



- High-powered UV LED
- High, low, or strobe light
- Focusable beam
- Rugged aluminum body
- 3 AAA batteries included
- No UV enhancing glasses needed



SEEKERmax™

87DCPLUS*



- Rechargeable 2200 mAh lithium-ion battery
- High-powered UV LED
- High, low, or strobe light
- Focusable beam
- Rugged aluminum body
- No UV enhancing glasses needed




UV POCKET LIGHT

89DC



- 7 high intensity UV LEDs
- Compact size
- 180° swivel magnetic clip
- 3 AAA batteries included
- No UV enhancing glasses needed

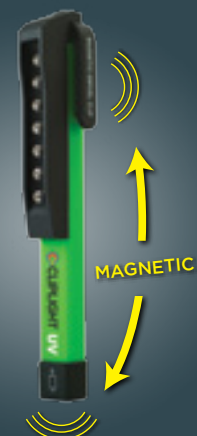

DRY R™ SYSTEM SAVER

- Eliminates moisture & increases efficiency
- Prevents acid & waxing formation
- Dissolves blockages & frees up TXVs
- Compatible with all oils & refrigerants

HOW DOES DRY R™ WORK?

DRY R™ eliminates 60 drops of water and does not use alcohol to mask moisture. Instead, DRY R™ chemically breaks down H₂O molecules to eradicate moisture, dissolve blockages, & free up metering devices.

ADDED BENEFITS

DRY R™ conditions & stabilizes oil by lowering overall moisture parts per million – no particulate, gels, or polymers will form. DRY R™ reduces the harmful effects of moisture in all oils & refrigerants. It is essential for removing moisture in R410A systems.

IMPROVES PERFORMANCE OF AC/R SYSTEMS

DRY R™ FREES UP STICKING OR BLOCKED TXVs

DRY R™ enhances function of driers and metering devices – eliminating ice crystals and breaking down blockages by removing scale & sludge on moving parts, such as TXVs.

By removing non-condensables, DRY R™ boosts oil and refrigerant performance – providing true energy savings to the home or business owner, plus increasing the life of coils and compressors.



973KIT*
ALL SYSTEMS – UP TO 5 TONS | 17 KW
APPLY SECOND CAN FOR SYSTEMS
5+ TONS | 17+ KW



Eliminates 60 Drops of Water



Equipment Safe



Boosts Efficiency



Hose Included

PIVOT

111114



- Strip array LED technology
- 5 LED top flashlight
- 360° folding swivel hook
- Magnetic base & back
- 3 AA batteries included



SOLD AS 9
PACK DISPLAY



PIVOT^{mini}

111115 - PIVOT MINI
111117 - PIVOT MINI CAMO



- 18 LED front | 3 LED top
- 360° folding swivel hook
- Magnetic base & back
- 3 AAA batteries included



SOLD AS 12
PACK DISPLAY



PIVOT³³

24-458 - PIVOT 33
24-460 - PIVOT 33 CAMO



- 28 LED front | 5 LED top
- 360° folding swivel hook
- Magnetic base
- 3 AA batteries included



SOLD AS 9
PACK DISPLAY



CLIPSTRIP™


111112 - CLIPSTRIP™ ORIGINAL
111116 - CLIPSTRIP™ CAMO



- Powerful pocket light
- Strip array LED technology
- 180° swivel magnetic clip
- 3 AAA batteries included



SOLD AS 12 PACK DISPLAYS (111112 SHOWN)

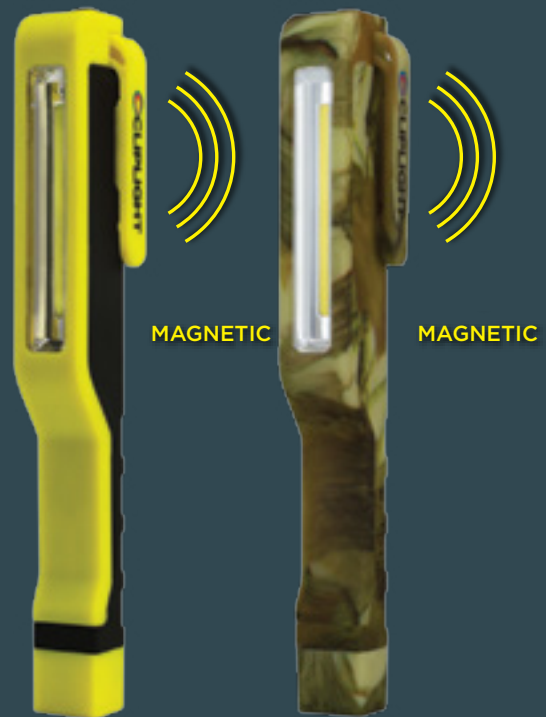

CLIPSTRIP™ AQUA

111113



- Waterproof & floating
- Strip array LED technology
- Rechargeable 2200 mAh lithium-ion battery
- Magnet and belt clip included

SOLD INDIVIDUALLY



VALVE CORE REMOVER

301



- Dual O-rings for maximum sealing
- Angled design – greater flow for faster recovery & charging
- Precision-machined ball valve
- Light weight & chrome plated brass cast
- Superior grip - never drop a valve core

ODOR~AID™ DISINFECT & DEODORIZE

171AIR

- Eliminates bacteria, germs, & micro-organisms that cause offensive odors
- Eliminates mold, mildew, & viruses
- Deodorizes & disinfects



**12 PACK
COUNTER
DISPLAY**

SPARK-KEY™

580500*



- Ignites all butane, propane, & gas torches
- Water-resistant & no batteries required
- 100,000 plus sure-fire sparks

**12 PACK
COUNTER
DISPLAY**

580512*



POINT OF PURCHASE DISPLAYS AVAILABLE WITH ORDERS



12 PACK COUNTER DISPLAY WITH PRODUCT BROCHURES
14" Wide • 16" High • 9" Deep
MKT - MERCH - SEAL12



30 PACK FLOOR DISPLAY
17" Wide • 36" High • 17" Deep
MKT - MERCH - SEAL30



MERCHANDISER DISPLAY
8" Wide • 11" High • 6" Deep
MKT - MERCH - FLEX

Download an electronic copy of this catalog at
<http://media.diversitech.com/doc/DOC19985.pdf>

LIT-CAT-SEAL
6650 Sugarloaf Parkway, #100
Duluth, GA 30097
678.542.3600
800.995.2222
678.542.3700 Fax
www.diversitech.com
© 2017 DiversiTech Corporation

