

А

DURALITE[™] 1212

MATERIAL & STYLE

Polyolefin Blend Straight Wall

1212-12

ANSI/SCTE-77, Tier 15 12.3 lbs ANSI/SCTE-77, Tier 22 12.3 lbs

1212-18

ANSI/SCTE-77, Tier 15 16.9 lbs

ANSI/SCTE-77, Tier 22 16.9 lbs

OPTIONS

Mouseholes/Knockouts

	А	В	С
1212-12	15 3/8"	15 3/8"	12"
1212-18	15 3/8"	15 3/8"	18"

Cover comes standard with permanent markings for manufacturer, load rating, model size and manufacturing location. Based upon lid and body combination, this unit can be Tier 15 or Tier 22. T22 rating when paired with T22 Cover.

Revision 06/16/20

oldcastleinfrastructure.com (888) 965-3227

Solving today. Transforming tomorrow.™

1 NEGERINISH

В

15 3/8" 15 3/8" 12" 15 3/8" 15 3/8" 18"	A	В	С
15 3/8" 15 3/8" 18"	15 3/8"	15 3/8"	12"
	15 3/8"	15 3/8"	18"




For use in non-vehicular traffic situations only. Weights and dimensions may vary slightly.

Actual load rating is determined by

© 2020 Oldcastle Infrastructure, Inc

the box and cover combination.

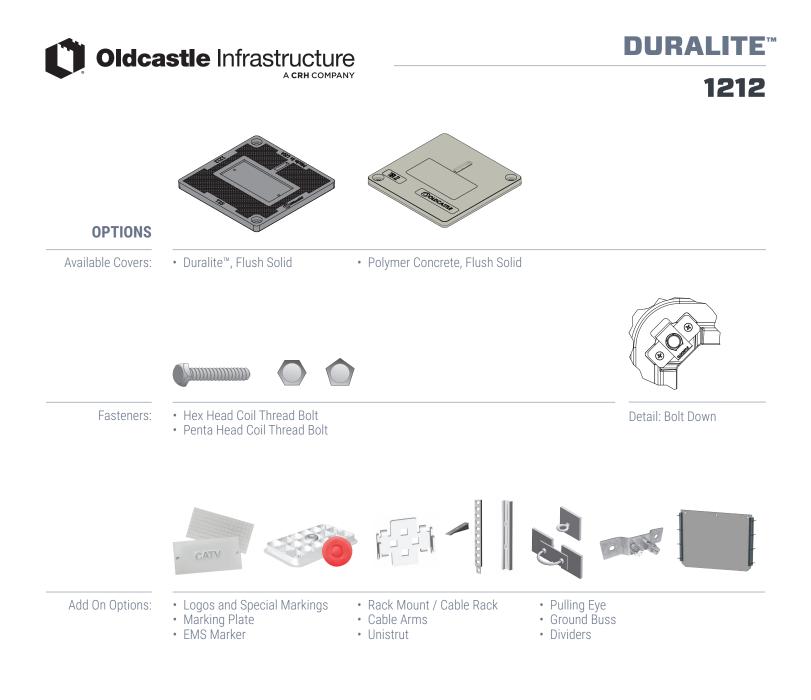

RAW MATERIAL	BODY : Material Property	Test Method	Typical Value ¹
SPECIFICATION	Density	ASTM D1505	0.960 to 0.980, g/cm3
SPECIFICATION	Tensile Strength, at break	ASTM D638	5,500 to 7,700 psi
	Flexural Modulus	ASTM D790	400,000 to 500,000 psi
	Impact Resistance	ASTM D5420	60.0 in-lb

¹ The values listed for physical property measurements are nominal values only. Certain physical property measurements are subject to variations consistent with the test methods and are within a generally accepted range for such values.

WARNING: Cancer - www.P65Warnings.ca.gov

Product modifications, including but not limited to, cutting for conduit access, or "mouseholes" may alter ratings and product performance listed within this document unless stated otherwise.

All information contained on this sheet is current at the time of publication. Oldcastle reserves the right to discontinue or update product information without notice. Revision 06/16/20 © 2020 Oldcastle Infrastructure, Inc