




# GE Zoneline® Cooling and Electric Heat Fixed Speed Unit with Corrosion Protection 9,000 BTU, 230/208 Volt Model# AZES09DCXXA

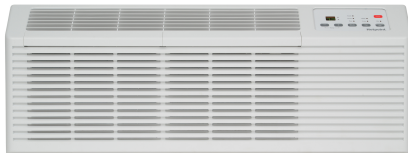

- R454B - Most environmentally friendly refrigerant on the market
- Heat pump down to 25°F
- Electronic touch controls with LED display
- Quiet Operation - baked on mastic sound barrier
- Corrosion protection package
- SMC basepan and bulkhead
- Electronic temperature limiting
- Fresh air vent

## FEATURES

Zoneline Features	"Sleep" Mode "Smart Fan" Fan Cycle Control Auto Power Recovery Automatic Indoor Frost Control Central Desk Control Compatibility Freeze Sentinel Heat Sentinel Proportional - Integral ID Airflow Random Twist/Length Segment Tangential Blower Remote Thermostat Compatibility Universal Heaters Weather Protected Electrical Components
Louver Style	Reversible
Control Type	Tactile touch pad with LED Display
Discharge Grille	2-position
Fan Speed Selections	Hi/Low Cooling Hi/Low Fan Only Hi/Low Heating
Sensible Heat Ratio	64%
Power Factor	98
Product Type	Packaged Terminal Air Conditioners (PTAC)
Refrigerant Type	R454B
Filter Type	Rigid Frame Slide-Out
Manual Vent Control	Hidden
Chassis Type	Slide-In
Fan Motor	2
Temperature Limiting	Electronic 7-Step
Fan Speed Control	Yes
Temperature Range	60 - 85 F
Corrosion Treated	Yes
Heat - Cool	Yes
Electronic Micro Computer Control	Yes
Fan Cycle Switch	Yes
Central Desk Control Compatibility	Yes
Rotary Compressor	Yes
Vent Control	3-position
Venting Features	Concealed Manual Vent Control Outdoor Vent Control - 3 Positions Vent Air Filter
Heating System	Electric Resistance



**GE APPLIANCES**  
a Haier company

*CustomerNet*

# GE Zoneline® Cooling and Electric Heat Fixed Speed Unit with Corrosion Protection 9,000 BTU, 230/208 Volt Model# AZES09DCXXA

---

## **APPROXIMATE DIMENSIONS(HxDxW)**

- 16 H x 42 W x 20 13/16 D

## **CAPACITY**

- Cooling BTUH (MAX) - 9500.00Btu
- CFM Indoor Fan Low - 265
- CFM Indoor Fan High - 375
- Cooling EER (BTUH / Watt) - 12.3 / 12.5
- Dehumidification (pts./hr.) - 2.2 (High Speed)
- Vent CFM (high fan at zero ESP) - 33
- Cooling BTUH (MIN) - 9500Btu

## **APPEARANCE**

- Color Appearance - Grey White

## **WEIGHTS & DIMENSIONS**

- Overall Width (in) - 42in
- Approximate Shipping Weight (lb) - 113lb
- Overall Height (in) - 16in
- Overall Depth (in) - 20 13/16in
- Net Weight (lb) - 103lb

## **POWER / RATINGS**

- Cooling - Amperes; L.R. - 21.0
- Cooling - Amperes; F.L. - Cooling - 3.5/3.9
- Cooling - Amperes - 3.5/3.9
- Cooling - Watts - 795/790
- Voltage (MIN) - 208V
- Heating BTUH - NA
- Voltage (MAX) - 230.000000V

## **ACCESSORIES**

- Accessories Required for Installation - RAB42 - Wall Case

## **WARRANTY**

- Warranty Notes - See written warranty for full details
- Labor Warranty - Limited 1-year entire appliance  
Limited 5-year sealed refrigerating system
- Parts Warranty - Limited 1-year entire appliance  
Limited 5-year sealed refrigerating system

## **CERTIFICATIONS**

- Claims & Certifications - California Prop 65  
UL  
AHRI  
CUL  
NRCAN

