

## HCC Holdings, Inc.

4700 West 160th  
Cleveland, Ohio 44135

Phone: 800-321-9532  
Website: www.Oatey.com




## PLUMBER'S SILICONE GREASE Universal All Purpose Grease

Date: August 2017

**Hercules Plumbers Silicone Grease** is a superior product that lubricates and prevents corrosion on valve stems, faucets, ballcock linkages, and other places where waterproof grease is needed. When applied to rubber and synthetic O-rings, insures free movement and extended service life of faucets. **Plumbers Silicone Grease** can also be used on sump and sewage ejector pump linkage to prevent corrosion and sticking.

Will not melt like ordinary grease and can be applied to both steam and hot/ cold water systems, withstanding exposure from -40°F to +400°F. Waterproof and heat resistant, **Plumbers Silicone Grease** will remain intact and not break down or disperse into water stream. Resists wash out even in severe water flow or water wash situations. Safe for use with potable water.

**Hercules Plumbers Silicone Grease** contains no petroleum products and can be used on plastic and rubber components. A smooth, VOC-free translucent gel maintains consistency under high temp exposure. Nonhazardous and odor-free

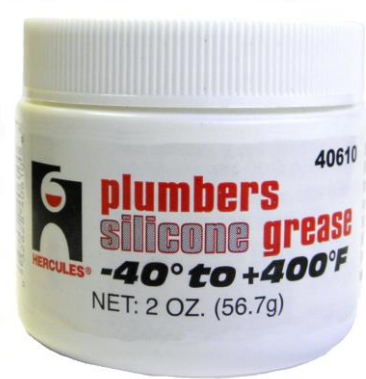

## APPROVALS & LISTINGS

Not applicable.

## SPECIFIC USES

When applied to rubber and synthetic O-rings, insures free movement and extended service life of faucets. **Plumbers Silicone Grease** can also be used on sump and sewage ejector pump linkage to prevent corrosion and sticking.

## SPECIFIC APPLICATIONS\*

**Plumbers Silicone Grease** can be used as a lubricant on sliding or rotating metal parts in steam and hot/cold water systems for valve stems, faucets, O-rings and ballcock assemblies.

\*For special applications which may not be covered on this or other Oatey literature, please contact Oatey Technical Services Department by phone 1-800-321-9532, or fax 1-800-321-9535, or visit our technical database web-site at [www.Oatey.com](http://www.Oatey.com).

## DIRECTIONS FOR USE

**Valve Bodies:** Unscrew valve bonnet nut. Rotate valve stem counter clockwise to remove from valve body. Clean stem and threads if necessary. Apply a liberal amount of Silicone Plumbers Grease to the stem and stem threads. Reassemble in reverse order. Tighten bonnet nut lightly. Retighten if necessary to prevent seepage when system pressure is restored.

**Ballcock and Float Linkages:** Clean and descale first if necessary. Apply liberally to all rubbing and pivoting surfaces. Apply a thin film to all metal parts in contact with water to prevent corrosion and scale build up. Apply to float linkage threads to prevent corrosion.

## PHYSICAL PROPERTIES

Specific gravity:	1.00
Solubility in water:	Not Soluble
Boiling point:	NA
Appearance/color/odor:	Smooth, translucent gel. Odorless

## WARNINGS OR CAUTIONS

- Read all cautions and directions carefully before using this product.
- **KEEP OUT OF REACH OF CHILDREN.**
- If **Plumbers Silicone Grease** is dropped on floor, wipe up to prevent slippery footing. Wash area thoroughly with soap and water.

## MATERIAL SAFETY INFORMATION

FOR MORE INFORMATION ON THIS PRODUCT, REQUEST SAFETY DATA SHEET (SDS) #7381E

For Delivery By Fax	Call 1-800-321-9535
Internet	See SDS section of <a href="http://www.Oatey.com">www.Oatey.com</a>

**HMIS® ratings** Health: 0  
 Flammability: 0  
 Physical hazard: 0

## SIZE & PACKING

STOCK NUMBER	SIZE	PACKING	WEIGHT/CASE	UPC
40610	2 oz.	24	4.2 lbs	032628-406100