

ACO Self

Residential & Landscape Products

The HexaLine Garage Pack is a convenient set that makes installation and cleaning easy. The pack includes:

- 3 HexaLine plastic channels (2 grate styles available)
- 2 end caps
- Bottom outlet
- Leaf guard

HexaLine is a recyclable polypropylene trench drain system with a range of innovative features, making installation easier than ever.

The lightweight, cellular construction allows for a simple 'push-fit' of channels and accessories and makes cleaning and maintenance easy.

Suitable for pedestrian/light vehicle traffic applications such as:


- Residential driveways
- Patios
- Basements
- Pools



Product Overview



Microgrip anti-slip texturing on plastic grates

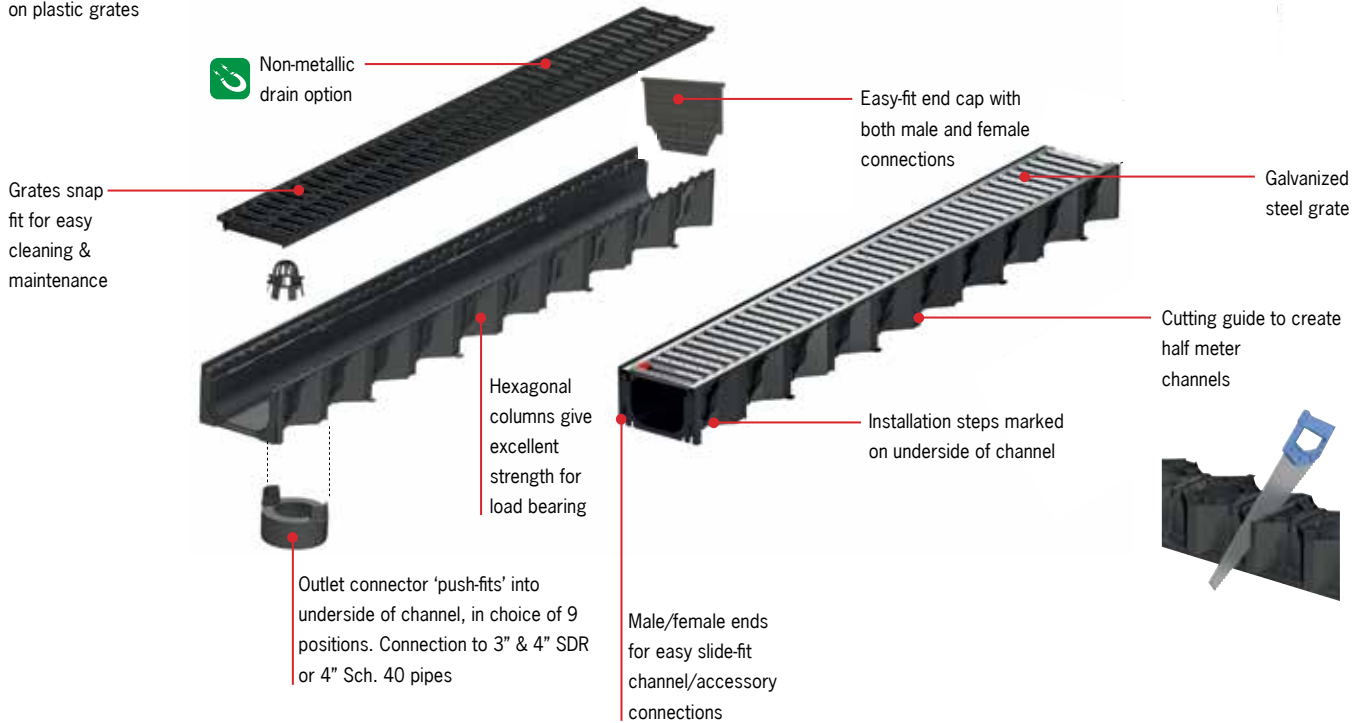

Parts Table

| | Part No. | Length inches | Width inches | Height inches | Wgt. lbs. |
|---|---------------|---------------|--------------|---------------|-----------|
| Garage Pack - black microgrip plastic grates* | 19305 | 39.4 | 5.1 | 9.6 | 8.92 |
| Garage Pack - galvanized steel grates* | 19309 | 39.4 | 5.1 | 9.6 | |
| Corner unit | 319560 | 5.1 | 5.1 | 3.2 | 0.81 |
| Accessory pack | 19303 | - | - | - | 0.4 |


*Pack includes 3 channels (39.4 in each).

Each HexaLine Garage Pack comes complete with:

- 3 HexaLine channels (almost 10 ft in length)
- choose either black microgrip or galvanized steel grates
- 2 closing end caps
- 1 bottom outlet
- 1 leaf guard



Grate Options

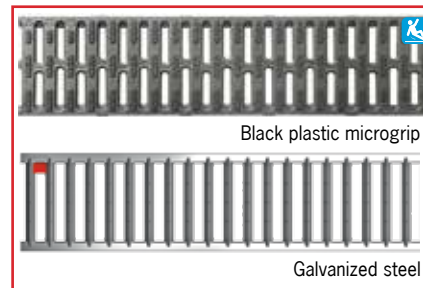

Black plastic microgrip

Galvanized steel

Accessories

A full range of accessories are available for simple installation.

Corner unit:

Allows up to 4 way channel connection



Accessory pack includes:

- 2 - closing end caps
- 1 - bottom outlet
- 1 - leaf guard



Installation Instructions



Excavate area to accommodate trench drain and 4" concrete surround.



Rough in 3" or 4" SDR pipe or 4" schedule 40 outlet pipe, compact excavation base and lay 4" deep concrete bed.




Knockout channel base for outlet and start to lay channels from outlet position.



Continue to lay channels working away from outlet, channels slide-fit together.



Pour 4" concrete around channel sides allowing for pavement detail (see section drawing above).

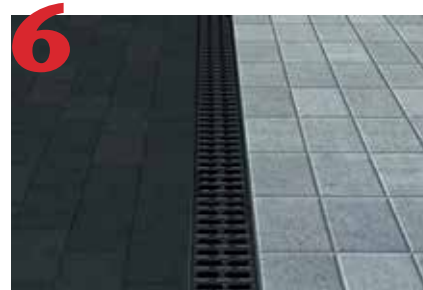

Finish pavement/pavers must be 1/8" higher than the grate.



For pedestrian **only** applications, trench drain can be set directly on well compacted soil. For driveway applications, trench drain **MUST** be surrounded by 4" of concrete.

ACO Polymer Products, Inc.

East Sales Office

9470 Pinecone Drive
Mentor, OH 44060
Tel: (440) 639-7230
Toll free: (877) 553-9961
Fax: (440) 639-7235

Southeast Sales Office

4211 Pleasant Road
Ft. Mill, SC 29708
Toll free: (877) 553-9961
Fax: (803) 802-1063

West Sales Office

825 W. Beechcraft St.
Casa Grande, AZ 85122
Tel: (520) 421-9988
Toll Free: (877) 553-9961
Fax: (520) 421-9899

Electronic Contact

info@acoself.com
www.acoself.com

Follow us on

