




"The Diamond of the Industry"

## Rigid-IMC Couplings Compression Type - (No Thread)

- Industrial specification grade, screw machined steel, zinc plated
- UL Listed Rain Tight and Concrete Tight 1/2" – 2"
- UL Listed Concrete Tight 2-1/2" – 4"

Cat. #	Size	Unit Ctn	Std Pkg	WT/100
NT2760	1/2"	20	100	16
NT2761	3/4"	20	100	24
NT2762	1"	5	50	48
NT2763	1-1/4"	5	25	64
NT2764	1-1/2"	5	25	110
NT2765 †	2"	3	15	140
NT2766 * †	2-1/2"	-	5	401
NT2767 *	3"	-	3	558
NT2768 * †	3-1/2"	-	2	718
NT2769 * †	4"	-	2	819
NT2780*	5"	-	1	1350

\* Malleable Iron † UL Pending for IMC conduit

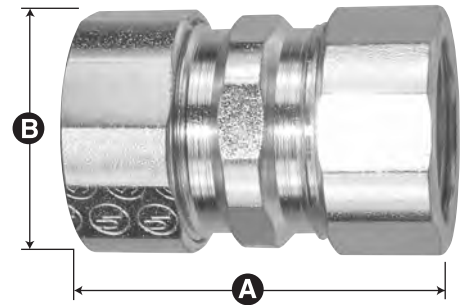

### Dimensional Table

Cat. #	A Length	B Diameter
NT2760	1.74	1.17
NT2761	1.82	1.43
NT2762	1.95	1.75
NT2763	2.65	2.15
NT2764	2.70	2.37
NT2765	2.93	3.38
NT2766	5.38	3.93
NT2767	5.63	4.66
NT2768	5.69	5.20
NT2769	5.88	5.75
NT2780	7.00	6.38