


**Note:**

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

**LRD3359**

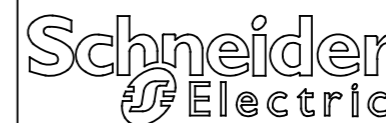

Schneider Electric United States  
 North American Division  
 Boston One Campus  
 800 Federal Street  
 Andover, MA 01810, USA  
 Phone: +1 8773425173  
 Email: CCC@us.schneider-electric.com

**Technical Information:**

Termination Method:	Screw Clamp
UL File/CCN:	E164353 / NKCR
CSA File:	LR43364 3211 03
Meets Standard:	IEC 60947-1
CE:	Yes
RoHS:	Yes
Weight:	1.12 lb (0.51 kg)
Power Wire Size :	#0 - #10 AWG
Control Wire Size:	#12 - #18 AWG
Power Terminal Torque:	75 lb-in (9 Nm)
Control Terminal Torque:	10 lb-in (1.2 Nm)
Mtg. Directly to Contactor:	Yes
Mtg. Separate from Contactor:	LA7D3064

**Specification:**

Description:	TeSys D IEC Overload Relays, Amb. Comp. Bimetallic Class 10 w Single Phase Sensitivity
Type:	TeSys D IEC Bi-Metallic Overload Relay 600V 65A
Ambient Comp. Bimetallic:	Yes
Solid State:	No
Class 10:	Yes
Class 20:	No
Single Phase Sensitivity:	Yes
For Use with Contactors:	LC1D50 thru LC1D80
Current Setting Range:	48A to 65A