



### Main

Product or component type	Dry Sealed Transformer
Primary Voltage	240 x 480 V
Full Capacity Taps	0
Secondary Voltage	120/240 V

### Complementary

Enclosure Code	13B
Phase	1 phase
Primary to Secondary Voltage	240 x 480 V 120/240 V
Power Rating	10 kVA
Temperature rise	115 °C
Maximum Height	14.75 in (374.65 mm)
Maximum Width	9.75 in (247.65 mm)
Maximum Depth	11.75 in (298.45 mm)
Net Weight	165 Lb(US) (74.84 kg) 164.99 lb(US) (74.84 kg)
Enclosure mounting	Wall mounted
Enclosure material	Painted sheet steel

### Environment

Enclosure Type	NEMA 3R
Insulation temperature	356 °F (180 °C)
Product certifications	CULus CSA UL Listed

### Ordering and shipping details

Category	16277 - RESIN LVGP XFMR
Discount Schedule	PE2
GTIN	00785901359562
Nbr. of units in pkg.	1
Package weight(Lbs)	165 lb(US) (74.84 kg)
Returnability	Yes
Country of origin	MX

### Packing Units

Package 1 Height	14.10 in (35.814 cm)
Package 1 width	14.00 in (35.560 cm)
Package 1 Length	10.70 in (27.178 cm)


## Offer Sustainability

Sustainable offer status	Green Premium product
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
PVC free	Yes




## Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

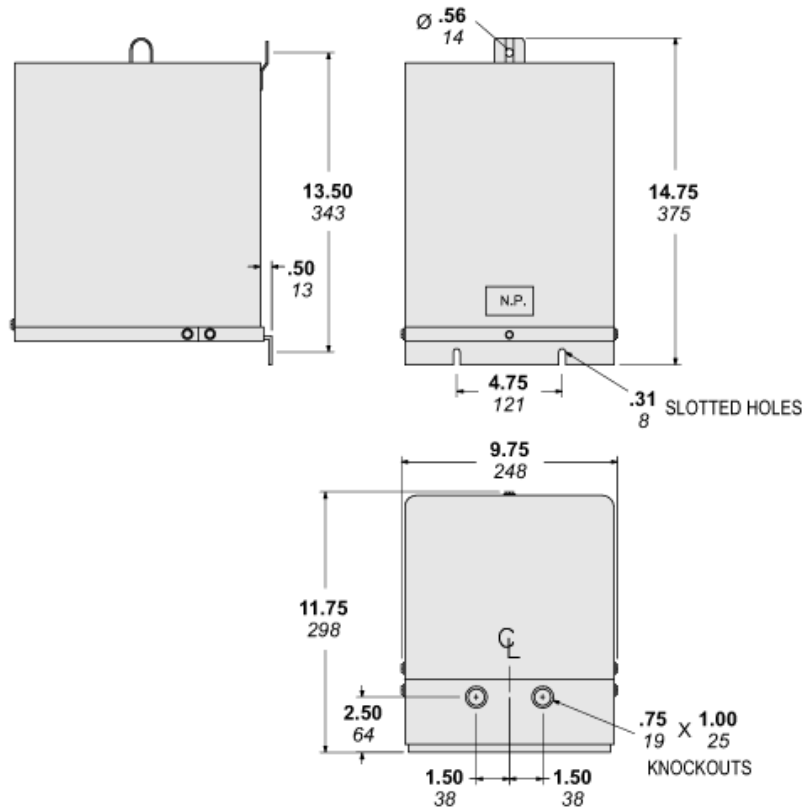

Wiring

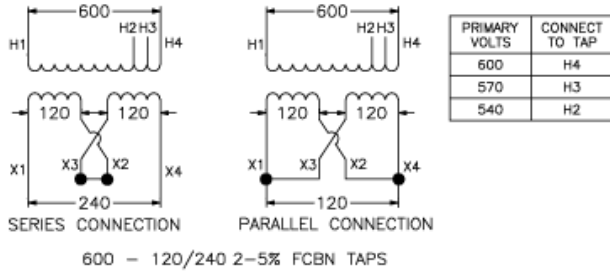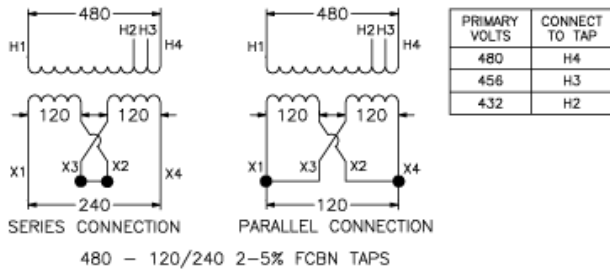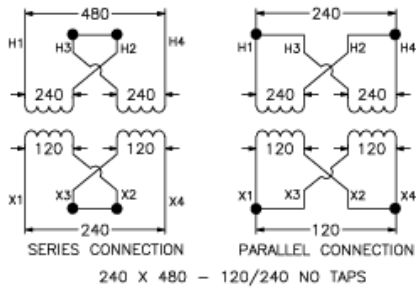

KVA	CATALOG NUMBERS			TEMP. RISE	GUAR. SOUND LEVEL	WGT LBS
	PRIMARY					
	240X480	480	600			
5	5S1F	5S40F	5S4F	115°C	40 DB	115
7.5	7S1F	7S40F	7S4F	115°C	40 DB	135
10	10S1F	10S40F	10S4F	115°C	45 DB	165