



Main

Product or component type	Miniature circuit-breaker
Range of product	QOU
Circuit breaker type	Standard
Circuit breaker application	HACR and Switching Duty rated

Complementary

Line Rated Current	15 A
Number of Poles	1P
Interrupt Rating	10 KA 120/240 V AC 10 KA 120 V AC 5 kA 48 V DC
Electrical connection	Slotted box lugs, line side Slotted box lugs, load side
[Ue] rated operational voltage	120/240 V AC 120 V AC 48 V DC
Mounting mode	Unit mount
AWG gauge	AWG 14...AWG 2 aluminium/copper
Maximum Height	4.05 in (102.87 mm)
Maximum Depth	2.95 in (74.93 mm)
Maximum Width	0.75 in (19.05 mm)
Tightening torque	45 lbf.in (5.08 N.m) AWG 14...AWG 2)

Environment

Product certifications	IEC UL Listed CSA
------------------------	-------------------------

Ordering and shipping details

Category	00900 - QOU BREAKERS & SWITCH
Discount Schedule	DE2
GTIN	00785901418504
Nbr. of units in pkg.	40
Package weight(Lbs)	0.35 lb(US) (0.16 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	0.90 in (2.286 cm)
Package 1 width	3.10 in (7.874 cm)
Package 1 Length	4.50 in (11.43 cm)
Unit Type of Package 2	CAR
Number of Units in Package 2	66
Package 2 Weight	24.95 lb(US) (11.317 kg)
Package 2 Height	3.10 in (7.874 cm)
Package 2 width	14.20 in (36.068 cm)
Package 2 Length	20.80 in (52.832 cm)
Unit Type of Package 3	PAL
Number of Units in Package 3	2772
Package 3 Weight	1018.00 lb(US) (461.757 kg)
Package 3 Height	40.00 in (101.6 cm)
Package 3 width	40.00 in (101.6 cm)
Package 3 Length	48.00 in (121.92 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

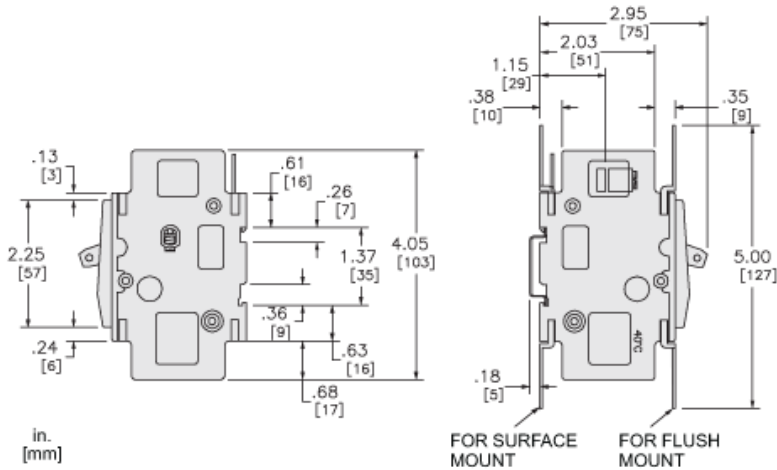

2.50 [64] MIN. WIRE BENDING SPACE FOR 2 AWG
 1.50 [38] MIN. WIRE BENDING SPACE FOR 14 AWG
 TYP. BOTH ENDS FOR ALL CB'S SHOWN PER ARTICLE 430-1-(B) NEC

