



Transformer Specifications	
PRIMARY VOLTAGE(S)	230*460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	100
RATED FREQUENCY	50/60
INSULATION CLASS	105
AGENCY APPROVALS	UL/CUL
ESTIMATED WEIGHT	4.4 LBS


TEST REQUIREMENTS	
WINDING	H4-H3 H2-H1 X2-X1
D.C. VOLTS	240 240 130.8
LOAD VOLTS	240 240 120
F.L. AMPS	0.270 0.270 0.833
HI-POINT	3000V 1800V
EXCITING AMPS	0.31AMPS @ 240 VOLTS, 50HZ
EXCITING WATTS	8.9 MAX




NOTE:  
1. ALL MEASUREMENTS IN INCHES (MM)  
INTERNALLY JUMPERED TO FUSE TERMINAL  
CONNECTION DIAGRAM

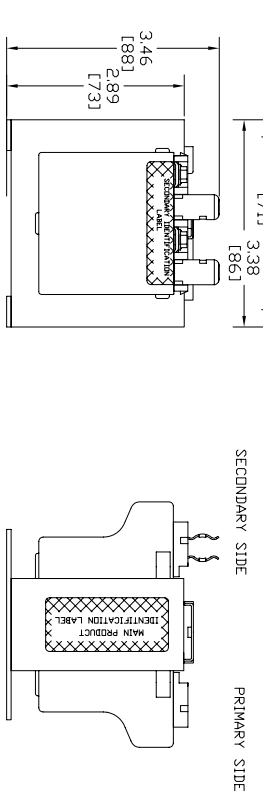

PRIMARY SIDE  
SECONDARY SIDE



PRIMARY IDENTIFICATION LABEL



SECONDARY IDENTIFICATION LABEL

**Cutler-Hammer**  
 INDUSTRIAL CONTROL TRANSFORMER  
 100VA  
 TEMP CL. 105°C  
 CAT. C0100E2A  
 SERIES 2  
 B100-2104-1  
 34095

MAIN PRODUCT IDENTIFICATION LABEL

REVISION DT1109			
UNLESS OTHERWISE SPECIFIED			
DIMENSIONS IN INCHES	DATE	DESIGNER/DRAWN	DATE
DRAWING FILE NO.	11/06/08	S. CASTRO	11/06/08
TIME PLACE DEC.	11/06/08	ENR. DEPT.	11/06/08
THREE PLACE DEC.	±0.005	APPRO.	DATE
ANGLES	±0.2	C. CASTORENA	11/06/08
TOLERANCE	±10%	ENGR REF.	
APPROX. DIMENSIONS	±1%	ENG REF.	
TEMPERATURE	±37°/±5°F	TEST METHOD	
DIMENSIONS TO BE INTERFERED		TOOL REF.	
ASME Y14.5M-1994		SCALE	
(SEE) THIRD ANGLE PROJECTION		SIZE	
		B	
		C0100E2ADWG	DWG NO.
		PARTS LIST	C0100E2A
			PRODUCT CODE
			1 OF 1
EATON CORPORATION - CONFIDENTIAL AND PROPRIETARY THIS DOCUMENT IS NOT BE LOANED, REPRODUCED, COPIED, OR OTHERWISE REPRODUCED WITHOUT THE WRITTEN CONSENT OF EATON. IN THE CASE OF CONTRACTING WORK, THIS DOCUMENT IS THE PROPERTY OF EATON AND SHALL REMAIN THE PROPERTY OF EATON. TITLE: MTE CONTROL TRANSFORMER 100 VA SERIES 2 SHEET NO.			

EAO, A20, FPMRT  
 REV. 05/03/08  
 4 3 2 1  
 © 2008 Eaton Corporation. All Rights Reserved.