


# Product data sheet

## Characteristics

# QO112M100PRB

Load center, QO, 1 phase, 12 spaces, 24 circuits, 100A convertible main breaker, PoN, NEMA3R, UL

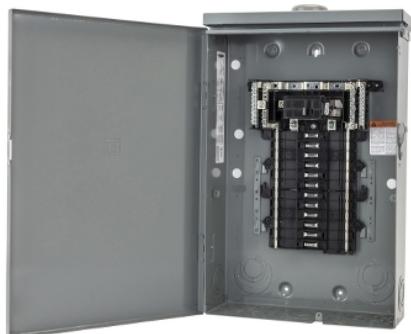

### Main

Marketing Trade Name	QO
Product Type	Load Center
Enclosure Type	Weatherproof enclosure

### Complementary

Load Center Type	Main breaker
Rated Current	100 A
Number of Spaces	12
Max Short Circuit Current Rating	22 kA
Maximum Number of Single Pole Circuits	24
Maximum Number of Tandem Breakers	12
Number of Phases	1 phase
Ground Bar	Grounding bar (ordered separately)
Box Number	3R
Height	18.92 in (480.57 mm)
Width	14.75 in (374.65 mm)
Depth	4.52 in (114.81 mm)

### Environment




Enclosure Rating	NEMA 3R outdoor
Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
Product Certifications	UL Listed

### Ordering and shipping details

Category	10002 - QO PON 1PH LC,12-60 CKT, N3R
Discount Schedule	DE3A
GTIN	00785901596530
Nbr. of units in pkg.	1
Package weight(Lbs)	1 lb(US) (0.45 kg)
Returnability	Yes
Country of origin	US

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Offer Sustainability

EU RoHS Directive	Compliant  <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 <a href="#">Yes</a>
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>