


HUBBELL-PRO LOCKING CONNECTOR

KEY FEATURES:

- Impact modified nylon body construction
- Rubber dust shield
- NEMA configuration and rating marked on device face
- Ready-to-wire
- Clearly marked terminal identification



DIMENSIONS

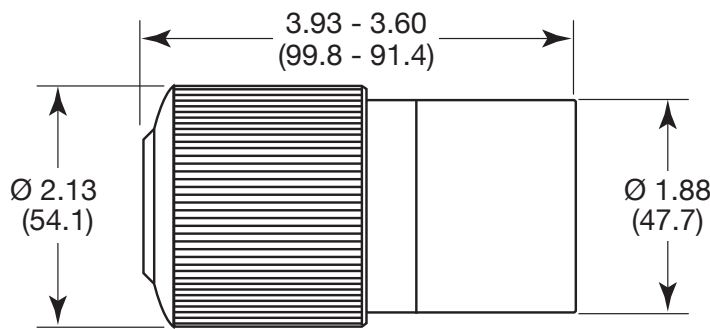

NEMA No.	Config.	Rating	Pole/Wire	Catalog Number
L5-20R		20A 125V	2P 3W Grounding	L520C
L6-20R		20A 250V	2P 3W Grounding	L620C
L7-20R		20A 277V AC	2P 3W Grounding	L720C
L5-30R		30A 125V	2P 3W Grounding	L530C
L6-30R		30A 250V	2P 3W Grounding	L630C L630CM2* Bulk Pack 100 pcs L630CBKM2* All Black, Bulk Pack 100 pcs
L7-30R		30A 277V AC	2P 3W Grounding	L730C

LISTINGS

- UL Standard 498
- CSA Standard C22.2 No. 42-M1984
- CSA Standard C22.2 No. 182.2-M1987
- PSE (L630C, L630CM2, L630CBKM2)
- Fed Spec WC596 (except **L630C**)
- RoHS Compliant

CORD RANGE

- 3 Conductor (stranded copper wire only)
- #18/3 SJ - #8/3 SO
 - .300 in. - .950 in. (7.6 mm - 24.1 mm)
- *Recommended for use with .500 in.-.950 in. cable

PERFORMANCE

- Flammability: V-0
- Operating Temperature:
 - Max. continuous 60°C;
 - Min. -40°C without impact

ENVIRONMENTAL

- NEMA Type 1
- IP20

MATERIALS

Part	Description
Pull Down Ring	Nylon, black
Grip Body	Nylon, black
Terminal Cover	Lexan
Drive Screw	Steel, Zinc Plate
Dust Shield	Rubber
Assembly Screw	Steel, Zinc Plate
Terminal Screw	Steel, Green, Nickel, Brass
Wire Clamp Nut	Brass/Steel/Tin Plate
Contacts	Brass
Connector face	Nylon, White

ACCESSORIES

- Weather protective boot **HBC2**