

FLEX • AC • MC

Quicklock Type Connectors with Insulated Throats for Flex • AC • MC • MCI-A cables



Applications

For connecting Flex, AC, MCI, MCI-A and HCF cable

Features

- No locknut required
- Single-unit or duplex construction with captive clamp
- Easy to install. Just tilt, insert and snap down
- Single unit construction eliminates loose component parts, integral green plastic insulated throat bushing provides maximum protection for wire installation
- RoHS compliant

Standard Materials

Steel

Standard Finish


Zinc plated

Applicable Third Party Standards


- UL Standard: 514B, Armored Cable Connectors, Type AC, Armored Cable Connectors Type AC - Certified for Canada
- Fed. Spec. W-F-406E
- ANSI/NEMA FB-1
- UL Listed File # E238299



QLKON



QL-DKON



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Combo Coupling - Rigid to Flex							
QL-50KON	1/2" Single	1.440	0.880	0.440	50	500	7.5
QL-50DKON**	1/2" Duplex	1.690	1.690	0.380	25	250	10.2
QL-75KON	3/4" Single	1.630	1.310	0.560	25	250	14.4

CABLE TYPE	QL-50KON 1/2" KO	QL-75KON 3/4" KO	QL-50DKON** 1/2" KO
AC STEEL KON	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3	10/4, 10/5, 8/3, 8/4, 6/3	14/2, 14/3, 14/4, 12/2, 12/3, 12/4
AC ALUMINUM KON	14/2, 14/3, 14/4, 12/2, 12/3, 12/4	10/4, 8/2, 8/3, 8/4	14/2, 14/3, 14/4, 12/2, 12/3, 12/4
MC STEEL KON	14/2*, 14/3*, 14/4*, 12/2*, 12/3*, 12/4*, 10/2	10/3*, 10/4*, 8/2*	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3
MC ALUMINUM INTERLOCKED KON	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2	10/3, 10/4, 8/2	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3
MC ALUMINUM KON	14/3, 14/4, 12/2*, 12/3*, 12/4, 10/2, 10/3		
MC ALUMINUM FLEX KON	12/3		
FLEX RW KON	3/8" Steel & Aluminum		
MCI-A KON	.500 - .610 12/4, 12/6, 12/8, 10/4		.410 - .590 14/3, 14/4, 12/2, 12/3, 12/4, 12/6, 12/8, 10/2, 10/3, 10/4

* Concrete tight when taped and used with PVC jacketed cord

** Accepts 2 cables of each size listed



FLEX • AC • MC


Quicklock Type Connectors with Insulated Throats for Flex • AC • MC • MCI-A cables

Applications

For connecting Flex, AC, MCI, MCI-A and HCF cable

Features

- No locknut required
- Double bite
- Single-unit construction with captive clamp
- Easy to install. Just tilt, insert and snap down
- Single unit construction eliminates loose component parts, integral green plastic insulated throat bushing provides maximum protection for wire installation
- Double clamp for better grip will not damage the wire
- **16 extra cables (UL approved)**
- RoHS compliant

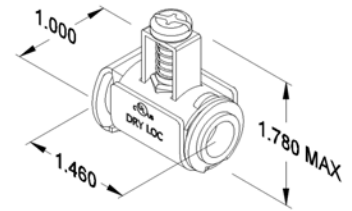

QL-DBKON

Standard Materials

Steel

Standard Finish

Zinc plated

Applicable Third Party Standards

- UL Standard: 514B
- Fed. Spec. W-F-406E

U.S. Patent No. 8.646.813

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	INNER PACK	MASTER PACK	WEIGHT PER C
Combo Coupling - Rigid to Flex							
QL-50DBKON	1/2" Single	1.000	1.460	1.780	25	125	7.5

CABLE TYPE	QL-50DKON** 1/2" KO
AC STEEL KON	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.470-.665 dia)
AC ALUMINUM KON	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4 (.450-.635 dia)
AC STEEL HCF KON	.470 - .665 dia.
AC ALUMINUM HCF KON	.410 - .650 dia.
MCI STEEL KON	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.410-.610 dia)
MCI ALUMINUM KON	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4 (.410-.650)
MCI STEEL HCF KON	.410 - .610 dia.
MCI ALUMINUM HCF KON	.410 - .650 dia.
MCI-A STEEL KON	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4 (.410-.630 dia)
MCI-A ALUMINUM KON	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.410-.610 dia)
FLEX STEEL & ALUMINUM KON	3/8"

Bolded information indicates new sizes available