

Workstation Wall Mount Fan With Pivoting Arm

18" HIGH VELOCITY FAN MOUNTED ON 24", 40", or 60" PIVOTING ARMS



Mounting Arm Features

- 1 1/2" square, 14 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long, 18/3 SJTW conductor cord and NEMA 5-15 grounded plug
- Dual electrical outlets embedded in arm to allow connection of modular fan and optional light
- Made in U.S.A. with domestic and foreign components.

Modular Fan Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1-Phase permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Coated steel guards / Aluminum blades
- Meets OSHA standards / 1 year limited warranty

Use on loading docks to cool off workers entering hot truck trailers.

Use at factory workstations to cool off people or the machines.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	FAN SIZE	ARM LENGTH	FAN CFM*			VELOCITY PROFILE	MAX AMPS	WT. (LBS)
				HIGH	MED	LOW	CFM / Area Sq Ft		
08009102	24-LDF-TE	18"	24"	1800	1500	1300	2900 / 125	2.2	31
08009202	40-LDF-TE	18"	40"						38
08009302	60-LDF-TE	18"	60"						44

*Measured 2 feet from face of fan

Optional Modular Lights



DKL-INC mounted on 40-LDF-TE (above)

Light Features

- Plugs into embedded outlet in arm
- On/Off switch and wire guard included
- Bulb included with DKL-QH and DKL-FL
- Made in U.S.A. with domestic and foreign components.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	LIGHT HEAD TYPE	MAX WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS)
04465602	DKL-INC	Incandescent	300	3,700	2,000	5
04465702	DKL-QH	Quartz Halogen	500	11,000	2,000	6
04843302	DKL-FL	Fluorescent	55	3,000	10,000	7
04708602	DKL-LED	LED	12	960	50,000	5

Low Velocity "Special Application" Workstation Fan



WALL MOUNT



BENCH MOUNT CEILING MOUNT

Features

- 12" all metal, gray powder coated fan that can be wall, ceiling or bench mounted
- Direct wire electrical connection
- Toggle switch
- Fan head tilts 90° in horizontal and vertical plane
- Meets OSHA standards / 1 year limited warranty
- Made in U.S.A. with domestic and foreign components

Standard Models

SIZE	MFG CATALOG NUMBER	MFG MODEL NUMBER	MOTOR HP	CFM* / RPM		VELOCITY PROFILE	AMPS HIGH	WT. (LBS)
				HIGH	LOW	CFM / Area Sq Ft		
12"	08708902	N-12	1/12	800 / 1350	600 / 1000	1200 / 40	0.6	12

*Measured 2 feet from face of fan

Loading Dock Lights - Modular

Modular Lights




Features

- 14" long, 18/3 conductor cord plugs into electrical junction box on arm
- On/Off switch & wire guard included with each light head
- Bulb included with all light heads except DKL-INC
- Imported to TPI specifications.
- DKL-LED-37 is compliant with ROHS 2 Directive (2011/65/EU), that of which includes the application exemptions outlined in Annex III of the directive.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	LIGHT HEAD TYPE	MAX WATTS	MAX LUMENS	AVE. BULB LIFE (HRS)	WT. (LBS)
04465602	DKL-INC	Incandescent	300	3,700	2,000	5
04465702	DKL-QH	Quartz Halogen	500	11,000	2,000	6
04708602	DKL-LED	LED	12	960	50,000	7
04881302	DKL-LED-37	LED	37	2,373	>30,000	5
04843302	DKL-FL	Fluorescent	55	3,000	10,000	7

Mounting Arms

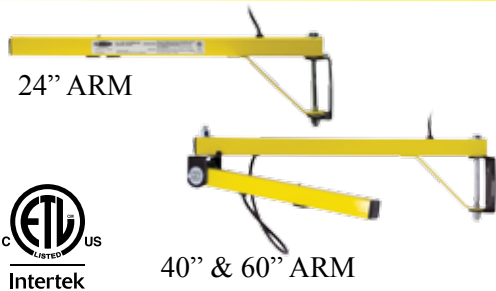

The outer arm on 40" & 60" arms will swing 300° in horizontal plane & 210° in vertical plane

Features

- 1 1/2" square, 11 gauge, steel tubing
- 3" x 5" x 3/16" mounting plate attaches with (4) 3/8" bolts
- 5' long, 18/3 SJTW conductor cord and NEMA 5-15 grounded plug
- Made in U.S.A.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	ARM LENGTH	TOTAL # OF ARMS	WT. (LBS)
04465402	DKL-40VA-ARM	40"	2	18
04465502	DKL-60VA-ARM	60"	2	24
04465302	24-LDA	24"	1	11
04466102	40-LDA**	40"	3	18
04466202	60-LDA**	60"	3	24

**Indicates heavy duty dock arms.

Loading Dock Arm Fan



Features

- 18" high velocity circulator, with 3 speed, 1/8 HP, 115V, 1phase permanently lubricated, totally enclosed, PSC motor
- Modular fan plugs into electrical outlet on arm
- Coated steel guards and aluminum blades.
- Imported to TPI specifications.

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	CFM			AMPS HIGH	WT. (LBS)
		HIGH	MED	LOW		
07971802	LDF-18-TE	1800	1500	1300	2.2	20

Note: Must be used with LDA (Heavy Duty) mounting arms.