


PLUMBING SOLUTIONS

What's keeping this...



Sewer and/or stormwater drain

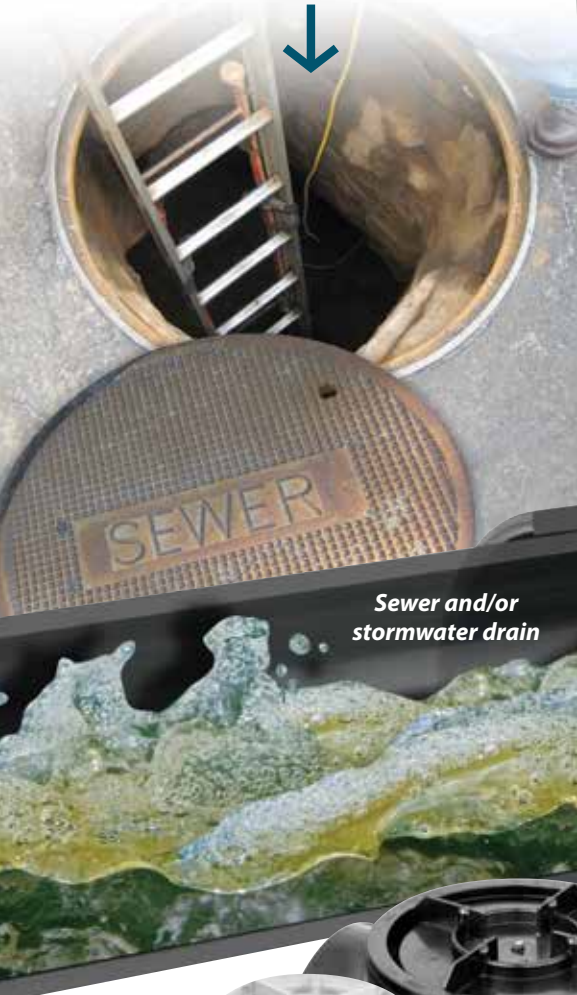

IPEX Backwater Valve

out of this?




To home drain connections



New! DWV pipe can now be solvent welded to the lids of the 3" and 4" backwater valves to serve as an extension handle for easier access to the plug.


Backwater Valves

These simple devices offer effective protection against the backflow of sewage and stormwater into homes and businesses.

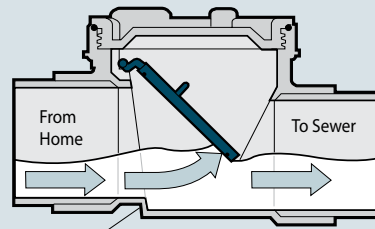

Built-in drainage slope

Under Normal Operation, the lightweight flapper opens and allows waste water to exit to sewer line.

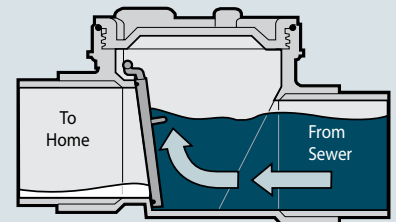


During a backflow, the flapper seals closed, stopping the flow from reaching interior drains entering the living space.



Backwater Valves


BACKWATER VALVE



BWV Sleeve Kits available, see USP Price List


| PART # | CTN. QTY. | SIZE |
|--------------------------------------|-----------|------|
| ABS - With DWV Hubs | | |
| 123281 | 15 | 1½" |
| 123282 | 15 | 2" |
| 123283 | 10 | 3" |
| 123284 | 4 | 4" |
| 123286 | 1 | 6" |
| PVC (White) - With DWV Hubs | | |
| 223281W | 15 | 1½" |
| 223282W | 15 | 2" |
| 223283W | 10 | 3" |
| 223284W | 4 | 4" |
| 223286W | 1 | 6" |
| PVC (White) - With Sewer Hubs | | |
| 223291W | 4 | 3" |
| 223289W | 2 | 4" |

BACKWATER VALVE WITH 16" ACCESS SLEEVE & ABS LID

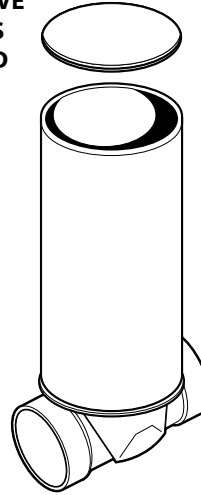

| PART # | CTN. QTY. | SIZE |
|---|-----------|------|
| ABS - With DWV Hubs | | |
| 123271 | 1 | 1½" |
| 123272 | 1 | 2" |
| 123287 | 1 | 3" |
| 123285 | 1 | 4" |
| PVC (White) - With DWV Hubs | | |
| 223271W | 4 | 1½" |
| 223272W | 1 | 2" |
| 223287W | 1 | 3" |
| 223285W | 1 | 4" |
| PVC (White) - With Cast Iron Lid | | |
| 223287WSC | 1 | 3" |
| 223285WSC | 1 | 4" |
| PVC (White) - With Sewer Hubs | | |
| 223290W | 1 | 3" |
| 223288W | 1 | 4" |

DIMENSIONS



| A | B | C | D |
|---------------------------|--------|-------------|---------|
| 1-1/2" Size Models | | | |
| 3-43/64" | 2-1/2" | 1-1/2" Nom. | 3-5/8" |
| 2" Size Models | | | |
| 3-5/8" | 3" | 2" Nom. | 3-5/8" |
| 3" Size Models | | | |
| 5" | 4-1/4" | 3" Nom. | 5-5/8" |
| 4" Size Models | | | |
| 7" | 6-1/4" | 4" Nom. | 6-1/2" |
| 6" Size Models | | | |
| 10-1/8" | 8-1/4" | 6" Nom. | 9-1/16" |

Note: If the valve is to be buried in the ground or installed under a concrete floor, an access sleeve with lid is to be installed over the opening in the top of the valve permitting access to the valve for periodic inspection. If the sleeve is solvent cemented to the valve, care must be taken to ensure that the operation of the access plug is not affected.

BWV's are recommended on all branch lines serving low level appliances, leaving the main line open to discharge and vent.

Extension Pipe (Not Included)
1-1/2" DWV pipe for 3" BWV lid
or
2" DWV pipe for 4" BWV lid

OR

A BWV can also be installed on the main line before it enters building.

Any drain openings behind the BWV are protected from backflows.



Plumbing Products for
the Construction Industry
ipexna.com

Eastern U.S. Customers
Tel: (289) 881-0120
Toll Free: 1-800-463-9572
Fax: (905) 844-0826

Western U.S. Customers
Tel: (303) 373-1918
Toll Free: 1-888-461-5307
Fax: (303) 373-1923