




Oatey[®]


Building Materials Catalog
ROOF FLASHING AND ACCESSORIES

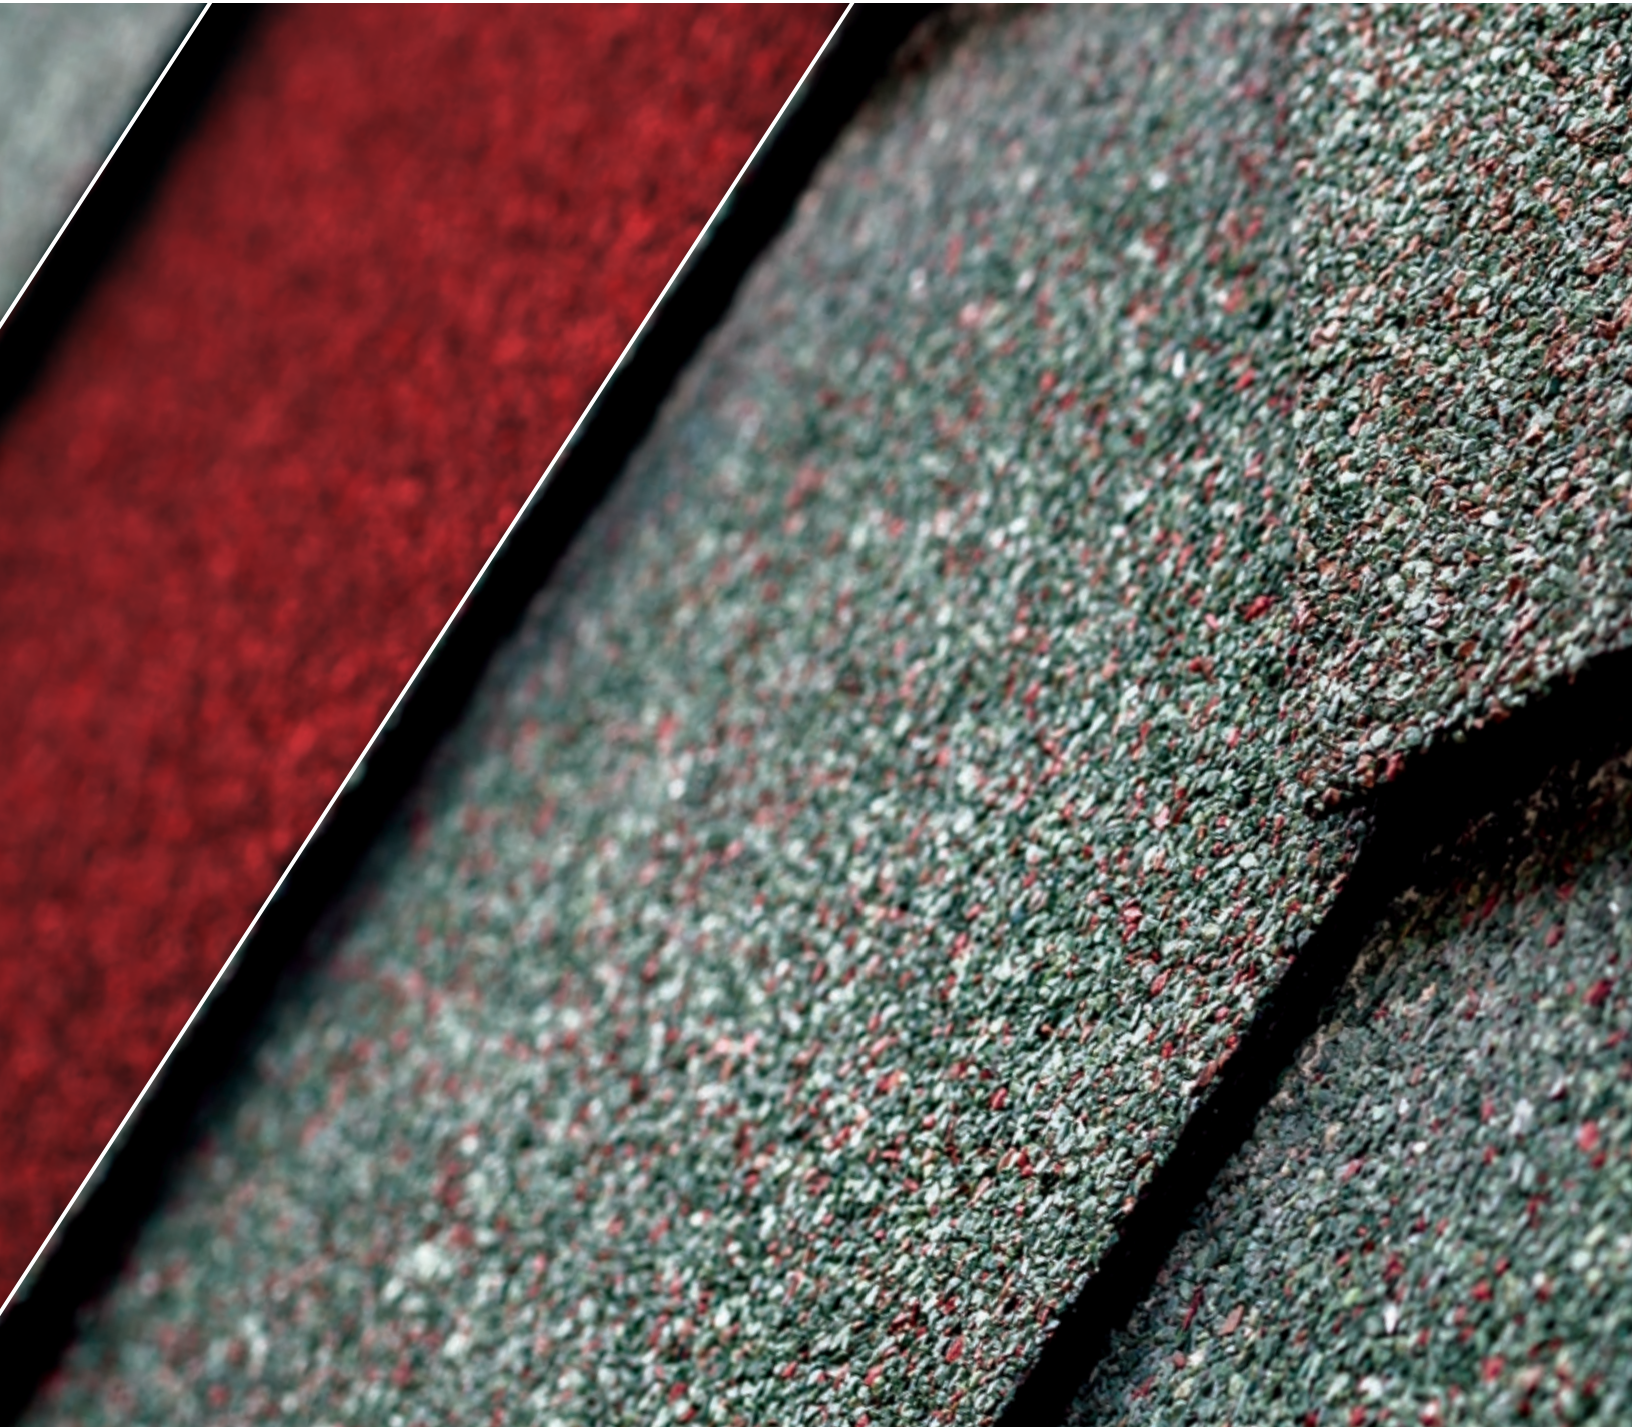

In 1916 L.R. Oatey founded his plumbing supply company in Cleveland, Ohio. Originally he sold one product, a lead roof flashing for venting plumbing pipes. The first flashings were all made from sheet lead. Our flashings progressed onto cast lead, followed by copper, galvanized and aluminum bases with poured lead collars.

L.R. insisted that everything about that product, everything that represented the Oatey brand, was about quality in meeting our customers' needs. We have not strayed from that same commitment even though 100 years later, we have expanded operationally to become a global manufacturer of thousands of products.

Today, Oatey offers over 6,000 residential and commercial plumbing products through its six branded lines. After a century of incredible progress, Oatey has changed with the times, meeting the needs of its customers and manufacturing products designed to deliver quality, build trust and improve lives. Because of this evolution, Oatey is recognized today as a leading manufacturer of high quality plumbing products.

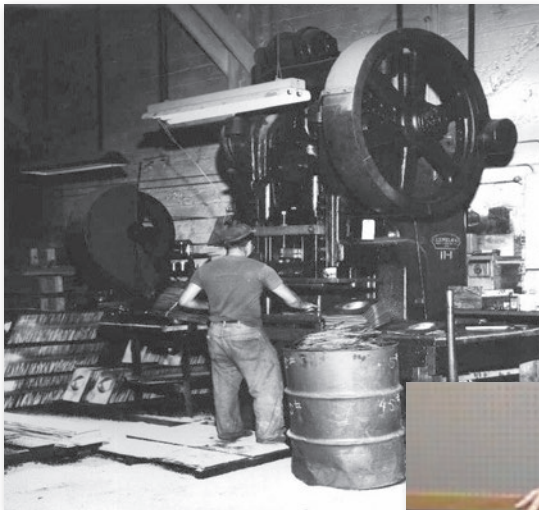

The last L.R. Oatey designed lead roof flashing (seen here) was produced by Oatey Co. on October 13, 2000, after which Oatey became a lead free company.


OATEY

1 THE POWER OF ONE



	Page
Flashings	3
Roof Drains	8
Sealants, Caulk and Epoxy	9
Copper Installation	10
Rainwater Diverter	11
Plastic Pipe Cements & Primers	11
Hand Cleaners & Lotion	12
Numeric Listings	13






#11854 shown


Galvanized No-Calk® Roof Flashings

- Galvanized Base.
- Self-sealing collar slides over pipe and requires no caulking.
- Metal base for pitch from 0-40° or up to 10/12 roof.
- Do not use petroleum based products or paint on flashing collar. Not for hot-mopped or built-up roofs.
- Rated 180°F continuous heat and approved for Type B installations.

Product No.	Size	Description	Ctn. Qty.
11840	1-1/4" – 1-1/2"	Galvanized 9" x 12-1/2" base	12
11853	2"	Galvanized 9" x 12-1/2" base	12
11866	3"	Galvanized 9" x 12-1/2" base	12
11879	4"	Galvanized 9" x 12-1/2" base	12




#12936 shown


Aluminum No-Calk® Roof Flashings

- Rustproof stamped aluminum base allows for easy shaping of flashing.
- Rated 180°F continuous heat and approved for Type B installations.
- Metal base for pitch from 0-40° or up to 10/12 roof.
- Self-sealing collar slides over pipe and requires no caulking.
- Do not use petroleum based products or paint on flashing collar. Not for hot-mopped or built-up roofs.

Product No.	Size	Description	Ctn. Qty.
12920	1-1/4" – 1-1/2"	Aluminum 9" x 12-1/2" base	12
12933	2"	Aluminum 9" x 12-1/2" base	12
12946	3"	Aluminum 11" x 14-1/2" base	12
12959	4"	Aluminum 12" x 15" base	12



#11898 shown


Thermoplastic No-Calk® Roof Flashings

- Non-fading, non-cracking, rigid black thermoplastic base.
- Self-sealing collar slides over pipe and requires no caulking.
- Do not use petroleum based products or paint on flashing collar or plastic base. Not for hot-mopped or built-up roofs.
- Plastic base for pitch from 0-45° or up to 12/12 roof.
- Rated 180°F continuous heat and approved for Type B installations.

Product No.	Size	Description	Ctn. Qty.
11908	1-1/4" – 1-1/2"	Thermoplastic 9-1/4" x 13" base	12
11909	2"	Thermoplastic 9-1/4" x 13" base	12
11910	3"	Thermoplastic 11" x 15" base	12
11911	4"	Thermoplastic 12" x 16" base	12

U.S. Patent No. 5,390,451




#11930 shown

High-Rise[®] Thermoplastic All-Flash[®] No-Calk[®] Roof Flashing

- Ideal for steep pitch roofs with non-fading, non-cracking, rigid black thermoplastic base.
- Self-sealing collar slides over pipe and requires no caulking.
- Do not use petroleum based products or paint on flashing collar or plastic base. Not for hot-mopped or built-up roofs.
- Plastic base for pitch from 10-60° or up to 20/12 roof.
- Rated 180°F continuous heat and approved for Type B installations.

Product No.	Size	Description	Ctn. Qty.
11930	1-1/2" – 3"	All-Flash High-Rise 11" x 19" base	6
11931	3" – 4"	All-Flash High-Rise 13" x 20" base	6



#12945 shown



U.S. Patent No. 5,588,267

All-Flash[®] Galvanized/Copper/Aluminum/Thermoplastic

- Patented All-Flash[®] design allows use on multiple pipe sizes with choice of Aluminum, Copper, Galvanized or Thermoplastic Base.
- Rated 180°F continuous heat and approved for Type B installations.
- Metal base for pitch from 0-40° and plastic base for pitch from 0-45°.
- Self-sealing collar slides over pipe and requires no caulking.
- Do not use petroleum based products or paint on flashing collar or plastic base. Not for hot-mopped or built-up roofs.

Product No.	Size	Description	Ctn. Qty.
GALVANIZED BASE FLASHING			
11871	1-1/2" – 3"	Galvanized All-Flash 11" x 14-1/2" base	12
11877	3" – 4"	Galvanized All-Flash 12" x 15" base	12
COPPER BASE FLASHING			
12403	1-1/2" – 3"	Copper No-Calk 11" x 14-1/2" base	12
12404	3" – 4"	Copper No-Calk 11" x 14-1/2" base	12
ALUMINUM BASE FLASHING			
12945	1-1/2" – 3"	Aluminum All-Flash 11" x 14-1/2" base	12
12956	3" – 4"	Aluminum All-Flash 12" x 15" base	12
THERMOPLASTIC BASE FLASHING			
11919	1-1/2" – 3"	Thermoplastic All-Flash 11-1/4" x 15" base	12
11920	3" – 4"	Thermoplastic All-Flash 12" x 16" base	12



Aurora[™] No-Calk[®] Solar Flashings

- Can be used in commercial and residential applications where a water-tight seal for roof penetrations around the piping for solar mounting system is required.
- Low profile flashing collar design provides a clean finished appearance.
- Available in galvanized bases.
- Rated 180°F continuous heat and approved for type B installations.

Product No.	Size	Description	Ctn. Qty.
12802	1/2" - 1-1/2"	Aurora Solar Flashing 9-1/2" x 12-1/2"	12



#12944 shown



Color-Flash® Aluminum/Galvanized All-Flash® No-Calk® Roof Flashings

- Color base designed to match roof color.
- Self-sealing collar slides over pipe and requires no caulking.
- Do not use petroleum based products or paint on flashing collar or plastic base. Not for hot-mopped or built-up roofs.
- Metal base for pitch from 0-40° and plastic base for pitch from 0-45°.
- Rated 180°F continuous heat and approved for Type B installations.

Product No.	Size	Description	Ctn. Qty.
ALUMINUM BASE FLASHING			
12944	1-1/2" – 3"	Aluminum Brown 11" x 14-1/2" base	12
12943	1-1/2" – 3"	Aluminum Black 11" x 14-1/2" base	12
12942	1-1/2" – 3"	Aluminum Gray 11" x 14-1/2" base	12
12955	3" – 4"	Aluminum Brown 12" x 15" base	12
12954	3" – 4"	Aluminum Black 12" x 15" base	12
12953	3" – 4"	Aluminum Gray 12" x 15" base	12
GALVANIZED BASE FLASHING			
11872	1-1/2" – 3"	Galvanized Brown 11" x 14-1/2" base	12
11873	1-1/2" – 3"	Galvanized Black 11" x 14-1/2" base	12
11874	1-1/2" – 3"	Galvanized Gray 11" x 14-1/2" base	12
11875	3" – 4"	Galvanized Brown 12" x 15" base	12
11876	3" – 4"	Galvanized Black 12" x 15" base	12
11878	3" – 4"	Galvanized Gray 12" x 15" base	12



#14012 shown



Flex-Flash™ No-Calk® Roof Flashings

- 100% flexible, foldable plastic base.
- Self-sealing collar slides over pipe and requires no caulking.
- Do not use petroleum based products or paint on flashing collar or plastic base. Not for hot-mopped or built-up roofs.
- Plastic base for pitch from 0-45° or up to 12/12 roof.
- Rated 180°F continuous heat and approved for Type B installations.

Product No.	Size	Description	Ctn. Qty.
14009	1-1/4" – 1-1/2"	Flex-Flash 9" x 11" base	12
14012	2"	Flex-Flash 9" x 11" base	12
14025	2 – 1/2"	Flex-Flash 10" x 13-1/4" base	12
14038	3"	Flex-Flash 10" x 13-1/4" base	12
14041	4"	Flex-Flash 11-1/2" x 14" base	12



Electrical Service Mast (ESM) Master Flash® Roof Flashing

- Galvanized base.
- Self-sealing collar slides over pipe and requires no caulking.
- Collar unattached from flashing base for Electrical Service Mast applications.
- Do not use petroleum based products or paint on flashing collar or plastic base. Not for hot-mopped or built-up roofs.

Product No.	Size	Description	Ctn. Qty.
14090	0 – 5-3/8"	EPDM ESM Master Flash 15" x 15" base	4

MASTER FLASH® is a Registered Trademark of the Aztec Washer Company, Inc.



#14052 shown



Standard Master Flash® Roof Flashings

- Engineered for profiled roofing systems at any pitch.
- Rated 212°F continuous heat and approved for Type B installations.
- Easily customized to accommodate a broad range of pipe diameters.

Product No.	Size	Description	Ctn. Qty.
14050	1/4" – 2"	Master Flash 4-1/2" x 4-1/2" base	6
14051	1-1/4" – 3"	Master Flash 6" x 6" base	6
14052	1/4" – 4"	Master Flash 8" x 8" base	6
14053	3" – 6"	Master Flash 10" x 10" base	6
14054	4" – 8-1/4"	Master Flash 11" x 11" base	2
14055	5" – 9"	Master Flash 12" x 12" base	2



Universal Master Flash® Roof Flashings

- Engineered for profiled roofing systems at any pitch.
- Rated 212°F continuous heat and approved for Type B installations.
- Easily customized to accommodate a broad range of pipe diameters.

Product No.	Size	Description	Ctn. Qty.
14741	1/4" – 2-1/2"	Universal Master Flash 4-3/4" base	10
14742	1-3/4" – 3"	Universal Master Flash 6-1/4" base	10
14743	1/4" – 5"	Universal Master Flash 7-3/4" base	5
14744	3" – 6-1/4"	Universal Master Flash 9-1/4" base	5
14745	4-1/4" – 7-3/4"	Universal Master Flash 10-1/2" base	5
14746	5" – 9"	Universal Master Flash 13" base	5
14747	6" – 11"	Universal Master Flash 14-1/2" base	5
14748	7" – 13"	Universal Master Flash 16-1/2" base	5
14749	9" – 19"	Universal Master Flash 25-1/4" base	5

Installation of Oatey Standard or Universal Master Flash®



Choose appropriate Master Flash with opening at least 20% smaller than pipe diameter. If necessary trim opening to 20% smaller than pipe diameter.




Slide Master Flash down over pipe (A non-petroleum base lubricant will ease installation).



Press Master Flash down, bending it to conform to roof profile or roof irregularities. A blunt tool will help press flashing into tight roof angles.



Apply sealant between base and roof.

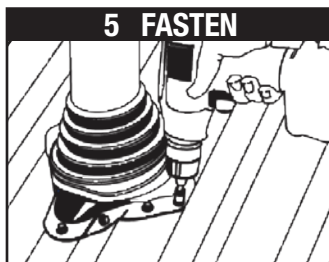

Use fasteners to complete sealing. For UPC installation, fastener spacing may not exceed 1-1/2" (38 mm).

MASTER FLASH® is a Registered Trademark of the Aztec Washer Company, Inc.



#14206 shown

Rain Collar for No-Calk® Roof Flashings

- Use as a protective water shield (slides over existing flashing).
- Do not use petroleum based products on rubber collars.
- Non-fading collar material.

Product No.	Size	Description	Ctn. Qty.
14122	1-1/4" – 1-1/2"	Collar	36
14205	1-1/4" – 1-1/2"	Collar – Carded	6
14135	2"	Collar	24
14206	2"	Collar – Carded	6
14193	3"	Collar	24
14207	3"	Collar – Carded	6
14203	4"	Collar	12
14208	4"	Collar – Carded	6
14136	1-1/2" – 3"	All Flash Collar	24



#12805 shown

Sideflash™ Vertical Flashing


Product No.	Size	Description	Ctn. Qty.
12805	1/2" – 2-1/2"	Sideflash Vertical Flashing – 8-1/2" x 8" base	12
12806	3" – 6"	Sideflash Vertical Flashing – 12-1/2" x 12" base	12

Sideflash Vertical Flashings protects from moisture, air and vermin and provides a superior seal around water lines, gas lines, HVAC and other side wall penetrations.

High Visibility Orange for Ease of Inspection

THE SIDEFLASH DIFFERENCE

- Easy to identify for residential inspections.
- Maintains constant seal at penetration.
- Prevents moisture, outside air, and vermin from entering.
- Helps meet current and future energy conservation codes.
- Rated to 180°F - Can be used for power-vented water heater exhaust.
- Tear-out collar accommodates a broad array of penetration sizes - from 1/2" to 2-1/2" or 3" to 6".



Spray foam or caulk can leak and cause damage.



Oatey Sideflash creates a constant seal for superior protection.



Sideflash covers completely for aesthetically finished look.



Roof Drains

- Offers superior drainage with robust debris protection.
- Provides a dome free-flow area over 200 square inches.
- Domes available in ABS and Cast Iron with 2 inch water dam collar.

Product No.	Size	Description	Ctn. Qty.
88032	2"	ABS Roof Drain w/ABS Dome & Dam Collar	1
88042	2"	ABS Roof Drain w/Cast Iron Dome & Dam Collar	1
88033	3"	ABS Roof Drain w/ABS Dome & Dam Collar	1
88043	3"	ABS Roof Drain w/Cast Iron Dome & Dam Collar	1
88034	4"	ABS Roof Drain w/ABS Dome & Dam Collar	1
88044	4"	ABS Roof Drain w/Cast Iron Dome & Dam Collar	1
88036	6"	ABS Roof Drain w/ABS Dome & Dam Collar	1
88046	6"	ABS Roof Drain w/Cast Iron Dome & Dam Collar	1



#14726 shown

Breathers and Vents

- A quality solution to moisture problems on commercial roofs by allowing the moisture to escape.
- One-way/two-way easy installation.
- Heavy gauge spun aluminum.
- Extra-wide 4" base opening.

Product No.	Size	Description	Ctn. Qty.
14726		HDPE Roof Breather, 1-Way	25
14731		Spun Aluminum Roof Breather, 1-Way	25



#25410 shown

Roof & Flashing Sealant

- Long-lasting sealant.
- No separation; no stirring time; no objectionable odor.
- Forms durable, flexible, weatherproof coating.
- Can be applied on cold or wet surfaces.
- Not for use on rubber boot of flashings.

Product No.	Size	Description	Ctn. Qty.
25403	10.3 oz.	Roof & Flashing Sealant – Cartridge	12
25405	1 qt.	Roof & Flashing Sealant	12
25410	1 Gallon	Roof & Flashing Sealant	6
25415	5 Gallon	Roof & Flashing Sealant	1



High Temp Red Silicone

- For high temperature applications.
- Flexible, durable, waterproof seal.
- Performs at temperatures ranging from -80° F to +600° F.

Product No.	Size	Description	Ctn. Qty.
25666	10.1 fl. oz.	High Temp Red – Cartridge	12



ProPoxy® 20

- Makes steel reinforced repairs in just 20 minutes.
- Kneads quickly and easily.
- Seals, mends, bonds and repairs almost anything, even underwater.
- Adheres to metals, masonry, wood, glass, and ceramics.
- When cured, may be drilled, sanded, filed and painted.
- Conforms to NSF standard 61 for use with potable water.

Product No.	Size	Description	Ctn. Qty.
25515	4 oz.	ProPoxy 20 – Display Pack (2 - 1 Oz.)	24



Plastic Poxly™

- For most plastics.
- Fully hardens in 40 minutes.
- Kneads quickly and easily.

Product No.	Size	Description	Ctn. Qty.
25531	4 oz.	Plastic Poxly – Display Pack (2 - 1 Oz.)	24



ProPoxy® Triple Play

- Three epoxies in one, handy package.
- Hercules ProPoxy 20, Copper Poxly and Plastic Poxly included.
- Cures in minutes.

Product No.	Size	Description	Ctn. Qty.
25527	4 oz.	ProPoxy Triple Play Putty Display Pack	24



#21305 shown

Bar Solder

- 50/50 Alloy of 50% Tin and 50% Lead.
- 361°F – 421°F melting range.
- **Contains lead. Not for use on drinking water lines.**
- For use with copper drain piping, tin plating, seaming joints and sheet metal.

Product No.	Size	Description	Ctn. Qty.
21305	1-1/4 lb.	50% Tin / 50% Lead Bar	10
20307	1-1/4 lb.	50% Tin / 50% Lead Bar	40



#30011 shown



No. 5 Paste Flux

- Cleans and fluxes at the same time.
- Effective on all metals except aluminum, magnesium and stainless steel.
- 100% lead free.
- Blended to clean surface oxidation.

Product No.	Size	Description	Ctn. Qty.
30011	1.7 oz.	No. 5 Flux	12
53017	1.7 oz.	No. 5 Flux W/Brush – Carded	12
53200	1.7 oz.	No. 5 Flux W/Brush – Carded*	12
30013	4 oz.	No. 5 Flux	24
30014	8 oz.	No. 5 Flux	24
30041	16 oz.	No. 5 Flux	12
30041D	16 oz.	No. 5 Paste Flux Display	12

*Packaged without inner display carton.



#30710 shown

Acid Brushes

- Perfect brush for applying liquid or paste fluxes.
- Approximately 5" long, 1/2" wide.

Product No.	Size	Description	Ctn. Qty.
30710	1/2"	Acid Brush – Carded	12
30711	1/2"	Acid Brush – Bulk (per gross of 144)	12
30712	1/2"	Acid Brush – with Barcode	144



RAINWATER DIVERTER



Mystic™ Rainwater Collection System

- Directs rainwater from downspouts into collection barrels for re-use in lawn/garden watering.
- Fits standard 2" x 3" residential downspouts.
- 2-piece design is made of UV-resistant material and can be painted.
- Comes with 4' high-flow hose.

Product No.	Size	Description	Ctn. Qty.
14209	2" x 3"	Mystic Rainwater Collection System – Display Box	4



PLASTIC PIPE CEMENTS & PRIMERS



#30246 shown



PW-DWV-SEWER

Handy Packs

- Convenient "Handy Pack" for storage – just add pipe and fittings.
- Contains one can of PVC Cement and one can of NSF Purple Primer.

Product No.	Size	Description	Ctn. Qty.
30246	4 oz.	PVC Regular & NSF Purple Primer	12
302483	8 oz.	PVC Regular & NSF Purple Primer – Display Pack	20
30246D	4 oz.	PVC Medium & NSF Purple Primer – Display Pack	24





#45314 shown

Hercules for Hands™ – Lemon Lotion Hand Cleaner

- Professional strength cleaner formulated with pumice.
- Citrus scent.

Product No.	Size	Description	Ctn. Qty.
45314	16 oz.	Hercules for Hands – Lemon Lotion Hand Cleaner – Flip Top Cap	12
45316	Gallon	Hercules for Hands – Lemon Lotion Hand Cleaner	4



#45333 shown

Hercules for Hands™ – Pre-Moistened Towels

- Formulated for trade professionals. Removes plastic pipe cement, roof cement and tar.
- Anti-bacterial, ready-to-use.

Product No.	Size	Description	Ctn. Qty.
45333	12" x 10"	Hercules for Hands – Pre-Moistened Towels - Dispenser Tub of 70 Towels	6
45333T	12" x 10"	Hercules for Hands – Pre-Moistened Towels - Pop Display of 30 Tubs	30



HERCULES FOR HANDS™
Tower of Tubs Merchandiser

Holds thirty tubs in a small footprint display.



Product No.	Size	Description	Ctn. Qty.	UPC	Category	Page Number
11840	1-1/4" – 1-1/2"	Galvanized No-Calk® 9" x 12-1/2" base	12	038753118406	Flashings	3
11853	2"	Galvanized No-Calk® 9" x 12-1/2" base	12	038753118536	Flashings	3
11866	3"	Galvanized No-Calk® 9" x 12-1/2" base	12	038753118666	Flashings	3
11871	1-1/2" – 3"	Color-Flash® Galvanized All-Flash® 11" x 14-1/2" base	12	038753118710	Flashings	4
11872	1-1/2" – 3"	Color-Flash® Galvanized Brown 11" x 14-1/2" base	12	038753118727	Flashings	5
11873	1-1/2" – 3"	Color-Flash® Galvanized Black 11" x 14-1/2" base	12	038753118734	Flashings	5
11874	1-1/2" – 3"	Color-Flash® Galvanized Gray 11" x 14-1/2" base	12	038753118741	Flashings	5
11875	3" – 4"	Color-Flash® Galvanized Brown 12" x 15" base	12	038753118758	Flashings	5
11876	3" – 4"	Color-Flash® Galvanized Black 12" x 15" base	12	038753118765	Flashings	5
11877	3" – 4"	Galvanized All-Flash® 12" x 15" base	12	038753118772	Flashings	4
11878	3" – 4"	Color-Flash® Galvanized Gray 12" x 15" base	12	038753118789	Flashings	5
11879	4"	Galvanized No-Calk® 9" x 12-1/2" base	12	038753118796	Flashings	3
11908	1-1/4" – 1-1/2"	Thermoplastic No-Calk® 9-1/4" x 13" base	12	038753119083	Flashings	3
11909	2"	Thermoplastic No-Calk® 9-1/4" x 13" base	12	038753119090	Flashings	3
11910	3"	Thermoplastic No-Calk® 11" x 15" base	12	038753119106	Flashings	3
11911	4"	Thermoplastic No-Calk® 12" x 16" base	12	038753119113	Flashings	3
11919	1-1/2" – 3"	Thermoplastic All-Flash® 11-1/4" x 15" base	12	038753119199	Flashings	4
11920	3" – 4"	Thermoplastic All-Flash® 12" x 16" base	12	038753119205	Flashings	4
11930	1-1/2" – 3"	All-Flash® High-Rise® 11" x 19" base	6	038753119304	Flashings	4
11931	3" – 4"	All-Flash® High-Rise® 13" x 20" base	6	038753119311	Flashings	4
12403	1-1/2" – 3"	Copper No-Calk® 11" x 14-1/2" base	12	750405124039	Flashings	4
12404	3" – 4"	Copper No-Calk® 11" x 14-1/2" base	12	750405124046	Flashings	4
12802	1/2" - 1-1/2"	Aurora™ No-Calk® Solar Flashing 9-1/2" x 12-1/2"	12	038753128023	Flashings	4
12805	1/2" – 2-1/2"	Sideflash Vertical Flashing – 8-1/2" x 8" base	12	038753128054	Flashings	7
12806	3" – 6"	Sideflash Vertical Flashing – 12-1/2" x 12" base	12	038753128061	Flashings	7
12920	1-1/4" – 1-1/2"	Aluminum No-Calk® 9" x 12-1/2" base	12	038753129204	Flashings	3
12933	2"	Aluminum No-Calk® 9" x 12-1/2" base	12	038753129334	Flashings	3
12942	1-1/2" – 3"	Aluminum Gray 11" x 14-1/2" base	12	038753129426	Flashings	5
12943	1-1/2" – 3"	Color-Flash® Aluminum Black 11" x 14-1/2" base	12	038753129433	Flashings	5
12944	1-1/2" – 3"	Color-Flash® Aluminum Brown 11" x 14-1/2" base	12	038753129440	Flashings	5
12945	1-1/2" – 3"	Aluminum All-Flash® 11" x 14-1/2" base	12	038753129457	Flashings	4
12946	3"	Aluminum No-Calk® 11" x 14-1/2" base	12	038753129464	Flashings	3
12953	3" – 4"	Color-Flash® Aluminum Gray 12" x 15" base	12	038753129532	Flashings	5
12954	3" – 4"	Color-Flash® Aluminum Black 12" x 15" base	12	038753129549	Flashings	5
12955	3" – 4"	Color-Flash® Aluminum Brown 12" x 15" base	12	038753129556	Flashings	5
12956	3" – 4"	Aluminum All-Flash® 12" x 15" base	12	038753129563	Flashings	4
12959	4"	Aluminum 1 No-Calk® 2" x 15" base	12	038753129594	Flashings	3
14009	1-1/4" – 1-1/2"	Flex-Flash™ No-Calk® 9" x 11" base	12	038753140094	Flashings	5
14012	2"	Flex-Flash™ No-Calk® 9" x 11" base	12	038753140124	Flashings	5
14025	2-1/2"	Flex-Flash™ No-Calk® 10" x 13-1/4" base	12	038753140254	Flashings	5
14038	3"	Flex-Flash™ No-Calk® 10" x 13-1/4" base	12	038753140384	Flashings	5
14041	4"	Flex-Flash™ No-Calk® 11-1/2" x 14" base	12	038753140414	Flashings	5
14050	1/4" – 2"	Master Flash® 4-1/2" x 4-1/2" base	6	038753140506	Flashings	6
14051	1-1/4" – 3"	Master Flash® 6" x 6" base	6	038753140513	Flashings	6
14052	1/4" – 4"	Master Flash® 8" x 8" base	6	038753140520	Flashings	6
14053	3" – 6"	Master Flash® 10" x 10" base	6	038753140537	Flashings	6
14054	4" – 8-1/4"	Master Flash® 11" x 11" based	2	038753140544	Flashings	6
14055	5" – 9"	Master Flash® 12" x 12" base	2	038753140551	Flashings	6
14122	1-1/4" – 1-1/2"	Rain Collar	36	038753141220	Flashings	7
14135	2"	Rain Collar	24	038753141350	Flashings	7
14136	1-1/2" – 3"	All Flash Rain Collar	24	038753141367	Flashings	7
14193	3"	Rain Collar	24	038753141930	Flashings	7
14203	4"	Rain Collar	12	038753142036	Flashings	7
14205	1-1/4" – 1-1/2"	Rain Collar – Carded	6	038753142050	Flashings	7



Product No.	Size	Description	Ctn. Qty.	UPC	Category	Page Number
14206	2"	Rain Collar – Carded	6	038753142067	Flashings	7
14207	3"	Rain Collar – Carded	6	038753142074	Flashings	7
14208	4"	Rain Collar – Carded	6	038753142081	Flashings	7
14209	2" x 3"	Mystic Rainwater Collection System – Display Box	4	038753142098	Rainwater Diverter	11
14090	0-5-3/8"	EPDM ESM Master Flash 15" x 15" base	4	038753140902	Flashings	5
14726		HDPE Roof Breather, 1-Way	25	750405147267	Roof Drains	8
14731		Spun Aluminum Roof Breather, 1-Way	25	750405147311	Roof Drains	8
14741	1/4" – 2-1/2"	Universal Master Flash® 4-3/4" base	10	750405147410	Flashings	6
14742	1-3/4" – 3"	Universal Master Flash® 6-1/4" base	10	750405147427	Flashings	6
14743	1/4" – 5"	Universal Master Flash® 7-3/4" base	5	750405147434	Flashings	6
14744	3" – 6-1/4"	Universal Master Flash® 9-1/4" base	5	750405147441	Flashings	6
14745	4-1/4" – 7-3/4"	Universal Master Flash® 10-1/2" base	5	750405147458	Flashings	6
14746	5" – 9"	Universal Master Flash® 13" base	5	750405147465	Flashings	6
14747	6" – 11"	Universal Master Flash® 14-1/2" base	5	750405147472	Flashings	6
14748	7" – 13"	Universal Master Flash® 16-1/2" base	5	750405147489	Flashings	6
14749	9"-19"	Universal Master Flash® 25-1/4" base	5	750405147496	Flashings	6
20307	1-1/4 lb.	50% Tin / 50% Lead Bar Solder	40	038753203072	Copper Installation	10
21305	1-1/4 lb.	50% Tin / 50% Lead Bar Solder	10	038753213057	Copper Installation	10
25403	10.3 oz.	Roof & Flashing Sealant - Cartridge	12	032628254039	Sealant, Caulk & Epoxy	9
25405	1 qt.	Roof & Flashing Sealant	12	032628254053	Sealant, Caulk & Epoxy	9
25410	1 Gallon	Roof & Flashing Sealant	6	032628254107	Sealant, Caulk & Epoxy	9
25415	5 Gallon	Roof & Flashing Sealant	1	032628254152	Sealant, Caulk & Epoxy	9
25515	4 oz.	ProPoxy® 20 – Display Pack (2 - 1 Oz.)	24	032628255159	Sealant, Caulk & Epoxy	9
25527	4 oz.	ProPoxy® Triple Play Putty Display Pack	24	032628255272	Sealant, Caulk & Epoxy	9
25531	4 oz.	Plastic Poxy™ – Display Pack (2 - 1 Oz.)	24	032628255319	Sealant, Caulk & Epoxy	9
25666	10.1 fl. oz.	High Temp Red – Cartridge	12	032628256668	Sealant, Caulk & Epoxy	9
30011	1.7 oz.	No. 5 Flux	12	038753300115	Copper Installation	10
30013	4 oz.	No. 5 Flux	24	038753300139	Copper Installation	10
30014	8 oz.	No. 5 Flux	24	038753300146	Copper Installation	10
30041	16 oz.	No. 5 Flux	12	038753300412	Copper Installation	10
30041D	16 oz.	No. 5 Paste Flux Display	12	038753300412	Copper Installation	10
30246	4 oz.	PVC Regular & NSF Purple Primer	12	038753302461	Plastic Pipe Cement & Primer	11
30246D	4 oz.	PVC Medium & NSF Purple Primer – Display Pack	24	038753302461	Plastic Pipe Cement & Primer	11
302483	8 oz.	PVC Regular & NSF Purple Primer – Display Pack	20	038753302485	Plastic Pipe Cement & Primer	11
30710	1/2"	Acid Brush – Carded	12	038753307107	Copper Installation	10
30711	1/2"	Acid Brush – Bulk (per gross of 144)	12	038753307114	Copper Installation	10
30712	1/2"	Acid Brush – with Barcode	144	038753307121	Copper Installation	10
45314	16 oz.	Hercules for Hands™ – Lemon Lotion Hand Cleaner – Flip Top Cap	12	032628453142	Hand Cleaners & Lotion	12
45316	Gallon	Hercules for Hands™ – Lemon Lotion Hand Cleaner	4	032628453166	Hand Cleaners & Lotion	12
45333	12" x 10"	Hercules for Hands™ – Pre-Moistened Towels - Dispenser Tub of 70 Towels	6	032628453333	Hand Cleaners & Lotion	12
45333T	12" x 10"	Hercules for Hands™ – Pre-Moistened Towels - Pop Display of 30 Tubs	30	032628453333	Hand Cleaners & Lotion	12
53017	1.7 oz.	No. 5 Flux w/Brush – Carded	12	038753530178	Copper Installation	10
53200	1.7 oz.	No. 5 Flux w/Brush – Carded	12	038753532004	Copper Installation	10
88032	2"	ABS Roof Drain w/ABS Dome & Dam Collar	1	038753880327	Roof Drains	8
88033	3"	ABS Roof Drain w/ABS Dome & Dam Collar	1	038753880334	Roof Drains	8
88034	4"	ABS Roof Drain w/ABS Dome & Dam Collar	1	038753880341	Roof Drains	8
88036	6"	ABS Roof Drain w/ABS Dome & Dam Collar	1	038753880365	Roof Drains	8
88042	2"	ABS Roof Drain w/Cast Iron Dome & Dam Collar	1	038753880426	Roof Drains	8
88043	3"	ABS Roof Drain w/Cast Iron Dome & Dam Collar	1	038753880433	Roof Drains	8
88044	4"	ABS Roof Drain w/Cast Iron Dome & Dam Collar	1	038753880440	Roof Drains	8
88046	6"	ABS Roof Drain w/Cast Iron Dome & Dam Collar	1	038753880464	Roof Drains	8



The Oatey® Network

Through seven manufacturing and distribution facilities located throughout North America and China, Oatey designs, manufactures and sources over 10,000 plumbing related products. Nearly 80% of our products are manufactured in the United States, and distributed in more than 70 countries worldwide.



For additional information please contact your local Oatey Sales Representative or email SpecialtySales@oatey.com

4675 W. 160th St. | Cleveland, OH 44135
216.267.7100 / 800.321.9532
Fax: 216.267.9845 / 800.321.9535
oatey.com

© 2016 Oatey. All Rights Reserved.
® Oatey is a registered trademark of Oatey Co.
This information is based on data believed to be reliable but Oatey makes no warranties, express or implied, as to its accuracy and assumes no liability arising out of its use. The data listed falls within the normal range of product properties but should not be used to establish specification limits or used alone as the basis of design. Oatey's liability to purchasers is expressly limited to the terms and conditions of sale.
LCS 1012