

# Express Hanger (XP)




Cable hanger for the fast suspension of a variety of services in an indoor stationary setting. Featuring a push-button release fastener for easier height adjustments. NOT suitable for use in chlorinated / swimming pool environments.

## FEATURES / BENEFITS


- Up to six times faster to install than traditional methods
- Keyless; no tool required for adjustment
- Ergonomic push buttons allow for rapid height adjustment
- Discreet and aesthetic design
- Supplied as a ready-to-use hanger kit with length of cable and pre-attached end fixing




## INSTALLATION & ADJUSTMENT



1.

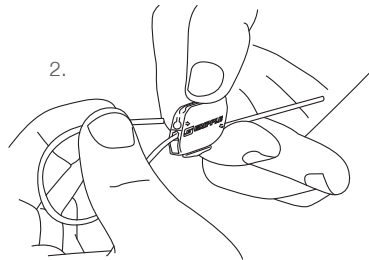


2.

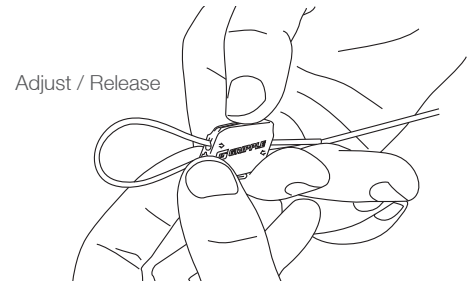

Adjust / Release

Ensure a minimum 3 inches of tail wire exits the fastener.

## SIZE SPECS

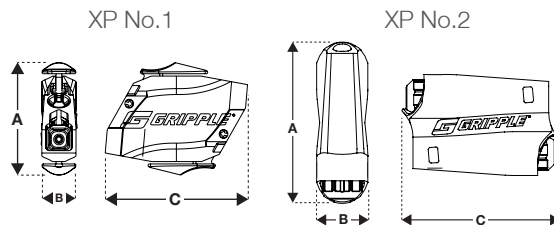

Dimension	XP No.1 (inches)	XP No.2 (inches)
A	0.73	0.84
B	0.23	0.46
C	0.93	1.12

## AVAILABLE END FIXINGS



For more options regarding available end fixings please contact us or visit [www.gripple.com](http://www.gripple.com)

## CABLE SPECS

Galvanized high tensile steel cable to EN12385. Standard lengths from 5ft-30ft, other lengths can be made to order.

	No.1	No.2
Cable Diameter	1/16"	5/64"
Strand Configuration	7x7	7x7
Min. Breaking Load	125 lbs	500 lbs
Max. Safe Working Load	33 lbs	100 lbs
Tensile Strength (lbs/sq.in.)	256,700	256,700

## MATERIAL SPECS

**Housing** - Type ZA2 Zinc

**Wedge** - Sintered steel hardened to min. 56 Rockwell C (No.3 - Sintered ceramic roller)

**Spring** - Stainless Steel (Type 302)

**End Cap** - UV Stabilized homopolymer polypropylene (No.3 Acetal)

**Buttons** - Acetal

### Safe Working Loads:

XP No.1 - up to 33 lbs @ 5:1 safety factor

XP No.2 - up to 100 lbs @ 5:1 safety factor

PI-EXPRESS-US

[www.gripple.com](http://www.gripple.com)

Gripple's policy is one of continuous development and innovation. We therefore reserve the right to alter specifications, etc. without notice.



Gripple Inc | 1611 Emily Lane | Aurora, IL 60502 | USA

Tel +1 866 474 7753 Fax +1 800 654 0689 Email [grippleinc@gripple.com](mailto:grippleinc@gripple.com)