

# X34 FLOODLIGHT INSTALLATION INSTRUCTIONS



Thank you for buying RAB lighting fixtures. Our goal is to design the best quality products to get the job done right. We'd like to hear your comments. Call the Marketing Department at 888-RAB-1000 or email: [marketing@rablighting.com](mailto:marketing@rablighting.com)



X34 6500



X34 3500



X34 1600

## IMPORTANT

**READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.**


Fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

**WARNING: Make certain power is OFF before installing or maintaining fixture. No user-serviceable parts inside.**

## MOUNTING

Mounting to a UL LISTED (Weatherproof) **Junction Box** on ground, wall and ceiling locations. *Junction box and cover are not supplied.*


1. Thread fixture into the cover plate.
2. Connect fixture wires to power line wires.
3. Attach cover plate to junction box.
4. Aim fixture in the desired direction and tighten locknut and arm screw.
5. The swivel arm on the X34 allows 180° of aiming adjustment.

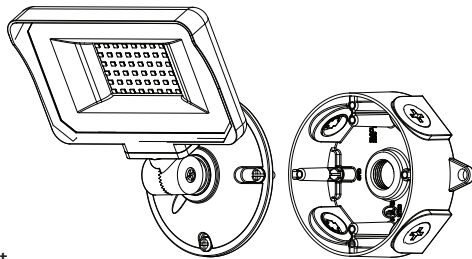

Mounting to a UL LISTED (Weatherproof) **Ground Mounted Post**

*Mounting post with cap is not supplied.*


1. Thread fixture knuckle into cap of post.
2. Connect fixture wires to power line wires.
3. Slide cap onto post and secure with screws.
4. Aim fixture in the desired direction and tighten locknut and arm screw.
5. The swivel arm on the X34 allows 180° of aiming adjustment.

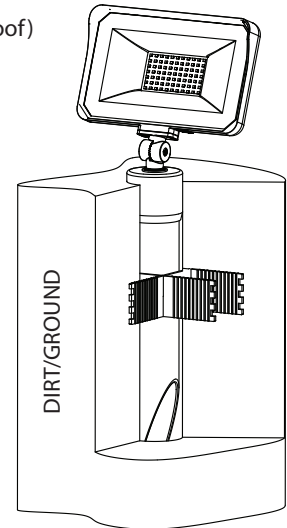

## WIRING

Fixture is either 120V or 277V. Wire only to circuit with same voltage as shown on fixture.

1. Connect the BLACK fixture lead to the (+) LINE supply lead.
2. Connect the WHITE fixture lead to the (-) COMMON supply lead.
3. Connect the GREEN ground wire from fixture to supply ground.

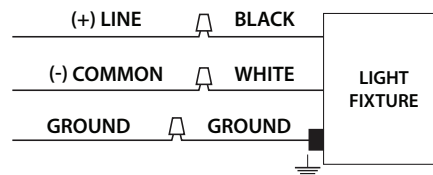

## CLEANING & MAINTENANCE

**CAUTION: Be sure fixture temperature is cool enough to touch. Do not clean or maintain while fixture is energized.**

1. Clean glass lens with non-abrasive glass cleaning solution.
2. LEDs and reflector do not require cleaning. Fixture is sealed—do not open.

*Note: These instructions do not cover all details or variations in equipment nor do they provide for every possible situation during installation, operation or maintenance.*



© 2018 RAB LIGHTING Inc.  
Northvale, New Jersey 07647 USA

### Easy Answers

[rablighting.com](http://rablighting.com)  
Visit our website for product info

Tech Help Line  
Call our experts - 888 722-1000

e-mail  
Answered promptly - [sales@rablighting.com](mailto:sales@rablighting.com)

Free Lighting Layouts  
Answered online or by request