

Why RACO[®] is the number one choice for ceiling fan, chandelier, and light fixture support products:

SAFE AND SECURE

All our products are rigorously tested to meet or exceed industry standards

USED IN NEW OR EXISTING CONSTRUCTION APPLICATIONS

RACO® products are designed to accommodate all of your installation needs

EASY PRODUCT IDENTIFICATION

Our easy-to-read product icons are located on our packaging and on a Product Selection Guide, enabling installer to easily identify the type and size of a desired product

INCREASED PROFITS


Products designed for multiple applications... which means fewer SKU's, less inventory and increased profits

HIGH QUALITY

Consistent with the high quality of the RACO® brand

UL LISTED

All RACO® Ceiling Fan Boxes are tested and comply with UL guidelines

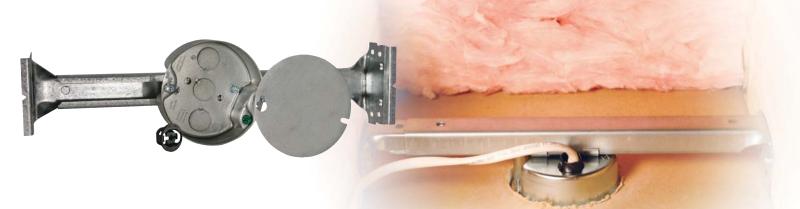


RACO® KWIK-BRACE® is designed for use in new construction or applications where joists are accessible. Patented K-Bracket allows for the ceiling fan box to be located anywhere along the length of the brace.

926-1 and 926 additional features: Locating tab quickly positions box for proper setback, two sets of mounting holes to secure to any style joist, prongs secure brace in position for hands free installation.

		MAX. RECOMMENDED SUPPORT Loads @ 16" Joist Spans								
CAT. NO.	DESCRIPTION	вох	KNOCKOUTS	CKOUTS BOX VOLUME		UPC BAR	CEILING Fan LBS.	FIXTURE LBS.		
		DEPTH	BOTTOM COND.	CU. IN.	PACK	CODE	(DYNAMIC)	(STATIC)		
Contractor Pre-Assembled "Bulk" Packaged										
926-1	4" Round	1-1/2"	2-1/2"	15.8	12	Yes	70	210		
Merchandised Packaged										
926	4" Round	1-1/2"	2-1/2"	15.8	6	Yes	70	210		



		MAX. RECOMMENDED SUPPORT LOADS @ 16" JOIST SPANS								
CAT. NO.	DESCRIPTION	ВОХ	KNOCKOUTS	BOX	CASE	UPC	CEILING	FIXTURE LBS.		
		DEPTH	BOTTOM COND.	VOLUME Cu. in.	PACK	BAR CODE	FAN LBS. (DYNAMIC)	(STATIC)		
Merchandise Packaged										
936	4" Round	1-1/2"	2-1/2"	15.8	6	Yes	70	110		
937	4" Round	2-1/8"	2-1/2"	22.4	4	Yes	70	110		

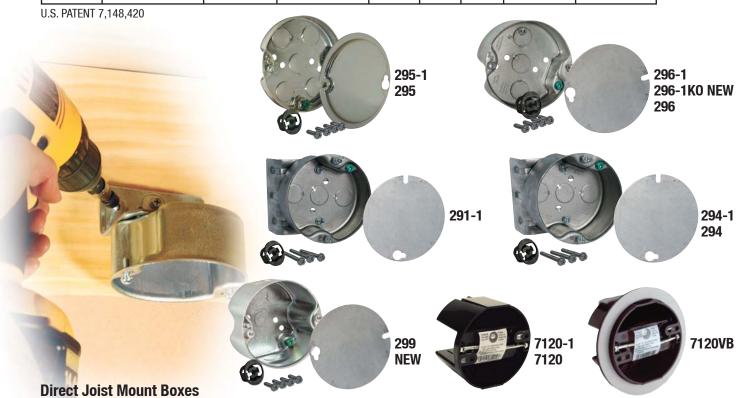

RACO® steel ceiling fan support boxes are constructed from one piece of steel and feature unique mounting screws for added durability. These boxes are used for new construction, applications where joists are accessible, or renovation (old work) where joist access is limited.

										MAX. RECOMMENDED SUPPORT LOADS	
CAT. NO.	DESCRIPTION	BOX DEPTH	CABLE CLAMPS	KNOCI SIDES CONDUIT	KOUTS Bottom Conduit	BOX VOLUME CU. IN.	CASE PACK	UPC BAR CODE	CEILING FAN LBS. (DYNAMIC)	FIXTURE LBS (STATIC)	
			Contractor P	re-Assemble	d "Bulk" Paci	kaged					
295-1	4" Round Pan	1/2"	-	-	5-1/2"	6.0	10	NO	70	150	
296-1	4" Round	1-1/2"	-	-	3-1/2"	15.8	20	NO	70	150	
296-1K0	4" Round	1-1/2"	-	2-1/2"	3-1/2"	15.8	20	NO	70	150	
291-1	4" Round w/Side Bracket	1-1/2"	-	-	3-1/2"	15.8	10	NO	70	150	
294-1	4" Round w/Side Bracket	2-1/8"	-	-	3-1/2"	22.4	10	NO	70	150	
7120-1	SADDLE-BOX®	-	4	2-1/2"	-	12.5	20	YES	70	210	
7120VB	SADDLE-BOX®	-	4	2-1/2"	-	12.5	20	YES	70	210	
			Мє	erchandised F	Packaged						
295	4" Round Pan	1/2"	-	-	5-1/2"	6.0	10	YES	70	150	
296	4" Round	1-1/2"	-	-	3-1/2"	15.8	8	YES	70	150	
294	4" Round w/Side Bracket	2-1/8"	-	-	3-1/2"	22.4	10	YES	70	150	
299	4" Round	2-1/8"	-	2-1/2"	3-1/2"	22.4	6	YES	70	150	
7120	SADDLE-BOX®	-	4	2-1/2"	-	12.5	20	YES	70	210	

RACO°

Product Selection Chart

		Maxii		Maximum fa	an weight			
Use wh								
Use where joists are accessible ₱								
Cubic Inch Ca								

APPLICATIONS	DESCRIPTION	MODEL Number	+	\	+	\	1
For fan with light kit or any fixture controlled from up to two locations	1-1/2" Deep, 4" round box with bracket	291-1	15.8	/		150	70
For fan with light kit or any fixture controlled from up to three locations			22.4	/		150	70
For fan without light kit or any fixture controlled from a single location	1/2" Deep, 4" round pan box	295-1 295	6.0	/	/	150	70
For fan with light kit or any fixture controlled from up to two locations	1-1/2" Deep, 4" round box	296-1 296-1K0, 296	15.8	>		150	70
For fan with light kit or any fixture controlled from up to three locations	2-1/8" Deep, 4" round box	299	22.4	/		150	70
For fan with light kit or any fixture controlled from up to two locations	KWIK-BRACE® with 1-1/2" Deep, 4" round box	926-1 926	15.8	/		*210	* 70
For fan with light kit or any fixture controlled from up to two locations RETRO-BRACE® with 1-1/2" 4" round box		936	15.8	/	1	*110	*70
For fan with light kit or any fixture controlled from up to three locations RETRO-BRACE® with 2-1/8" Deep, Deep box		937	22.4	/	/	*110	*70

^{*16&}quot; Joist Span Ratings

New and Improved

Bottom KO entry prevents cable damage by drywall installer

Extruded fan mounting holes for maximum thread engagement

THE INSIDER® for Nonmetallic wire installation Patented one piece, rigid construction

Neat installment


with 4" hole saw

10-32 Screw for Fan Mounting

8-32 Threaded hole for fixture mount

4-Way Ground Screw on raised surface of box. No screws protruding out back of box.

New Work Cover to protect wiring inside of box from paint and debris



U.S. PATENT 7,148,420

