

# The Simple, Revolutionary Extendable Backwater Valve Kit.



**Ground level accessibility.**




Up to 12' below grade

- Prevents the reverse flow of backwater into a structure as a result of a plugged sewer system, excess volume in the system or ground water flooding.

- Installs discretely outside, below grade, between the structure and the standard clean-out.

- Lifts up and out of housing for above ground maintenance and inspection.

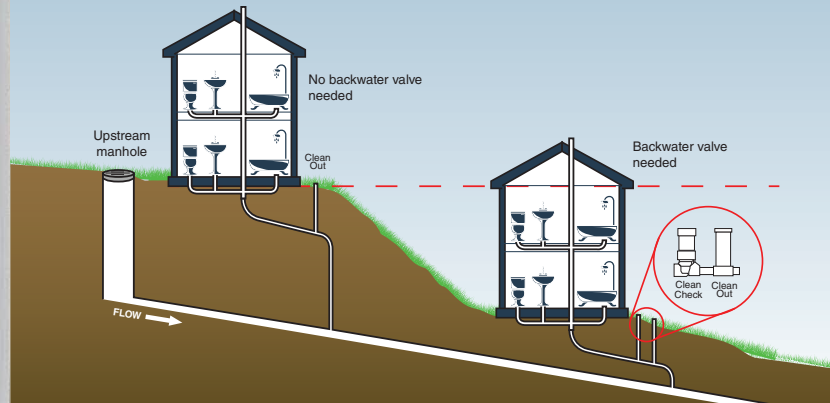

**Inground flapper eliminates  
costly manhole.**

Waste water  
flow from structure.  
(Flapper opens)

Reverse backwater  
flow from sewer line.  
(Flapper seals closed)



# Clean Check®

US Patent No. 5,234,018

## Extendable Backwater Valve Kit



Code	Description	Qty.
96921	3" PVC	3
96922	4" PVC	3
96926	6" PVC	3
96931	3" PVC w/adaptor & plug	3
96932	4" PVC w/adaptor & plug	3
97023	3" PVC	1
97024	4" PVC	1
97026	6" PVC	1
97033	3" PVC w/adaptor & plug	1
97034	4" PVC w/adaptor & plug	1
96901	3" ABS	3
96902	4" ABS	3
96911	3" ABS w/adaptor & plug	3
96912	4" ABS w/adaptor & plug	3
97003	3" ABS	1
97004	4" ABS	1
97013	3" ABS w/adaptor & plug	1
97014	4" ABS w/adaptor & plug	1
96980	3"-4" flapper (2015)	1
96981	3"-4" flapper (original)	1
96982	6" flapper	1
97002	3"-4" ABS rebuild kit (2015)	1
97022	3"-4" PVC rebuild kit (2015)	1
97025*	6" PVC rebuild kit	1

\*Available later in 2015



Optional Clean-out with adapter plug ▶

Available in 3", 4" and 6" sizes ▶

◀ Valve Body

Replaceable  
75 PSI flapper

Original

New

The new 2015 snap-in, pull-out flapper style, will phase out the original flapper.

**Rebuild kits are offered to upgrade older installations to the 2015 flapper.**

◀ Upper Collar

**Application** • Prevents sewage backup into plumbed structures as a result of a plugged sewer system, excess volume in the system or groundwater flooding.

**Application** • PVC • ABS

**Features** • No manhole required

- Installs discretely outside - up to 12' below ground level.
- Above ground outdoor maintenance accessibility eliminates hidden access indoor applications, and the sewer odor and mess of indoor maintenance.
- Meets IPC, UPC/IAPMO, ICC, IRC, CSA plumbing codes.

Lower Collar with Flapper. 3" and 4" collars accept both 2" and 4" standard pipe 6" Clean Check collars accept standard 4" pipe.

