


TAG: _____

SUBMITTAL

Cased A-coil

M4CXC018AA1CAAA

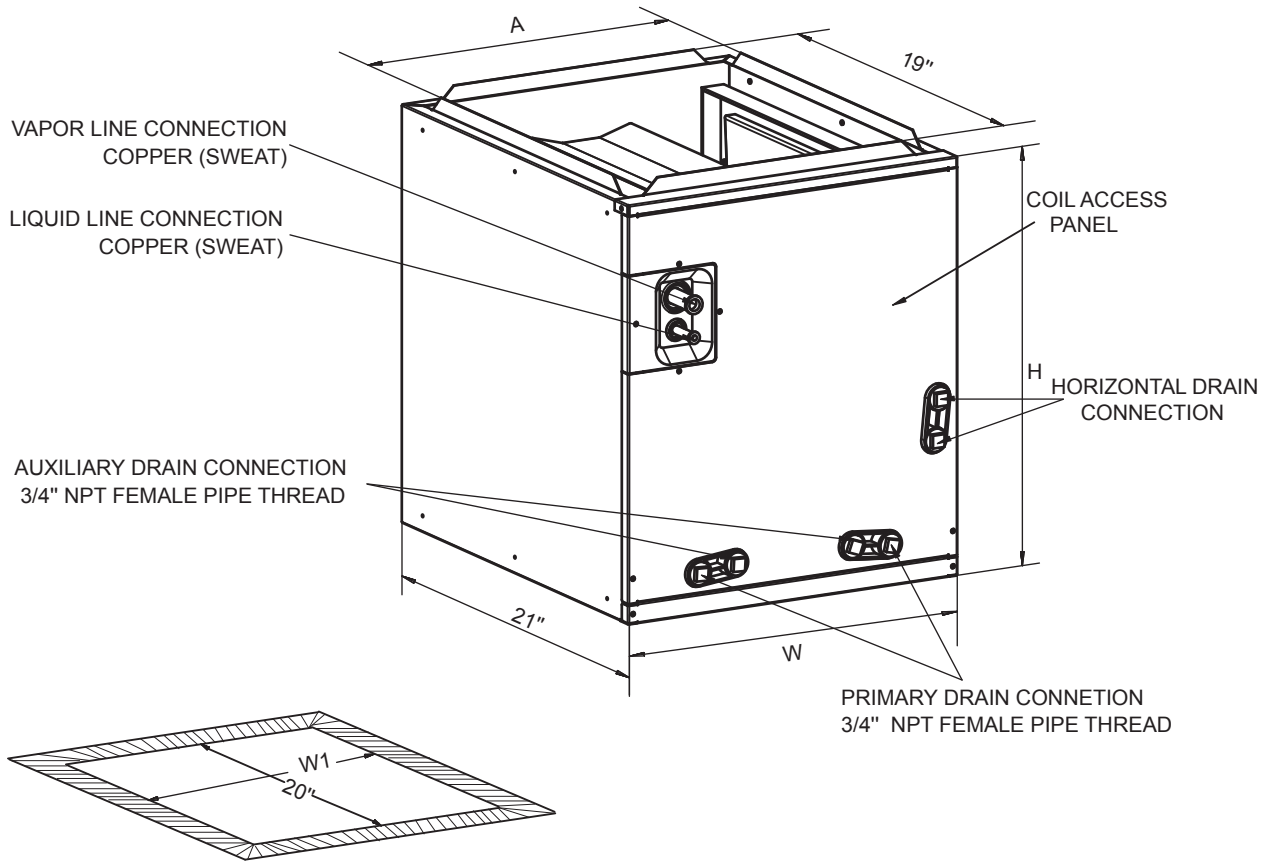

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC018AA1CAAA	508 (20)	368 (14-1/2)	330 (13)	343 (13-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC018AA1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	2 - 17
Face Area (sq. ft.)	3.73
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	22-3/4 x 17-1/2 x 24-3/8
Uncrated	20 x 14-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	47/44



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC018AA1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
349	518	659	768	875	967	1058	1135

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC019AB1CAAA

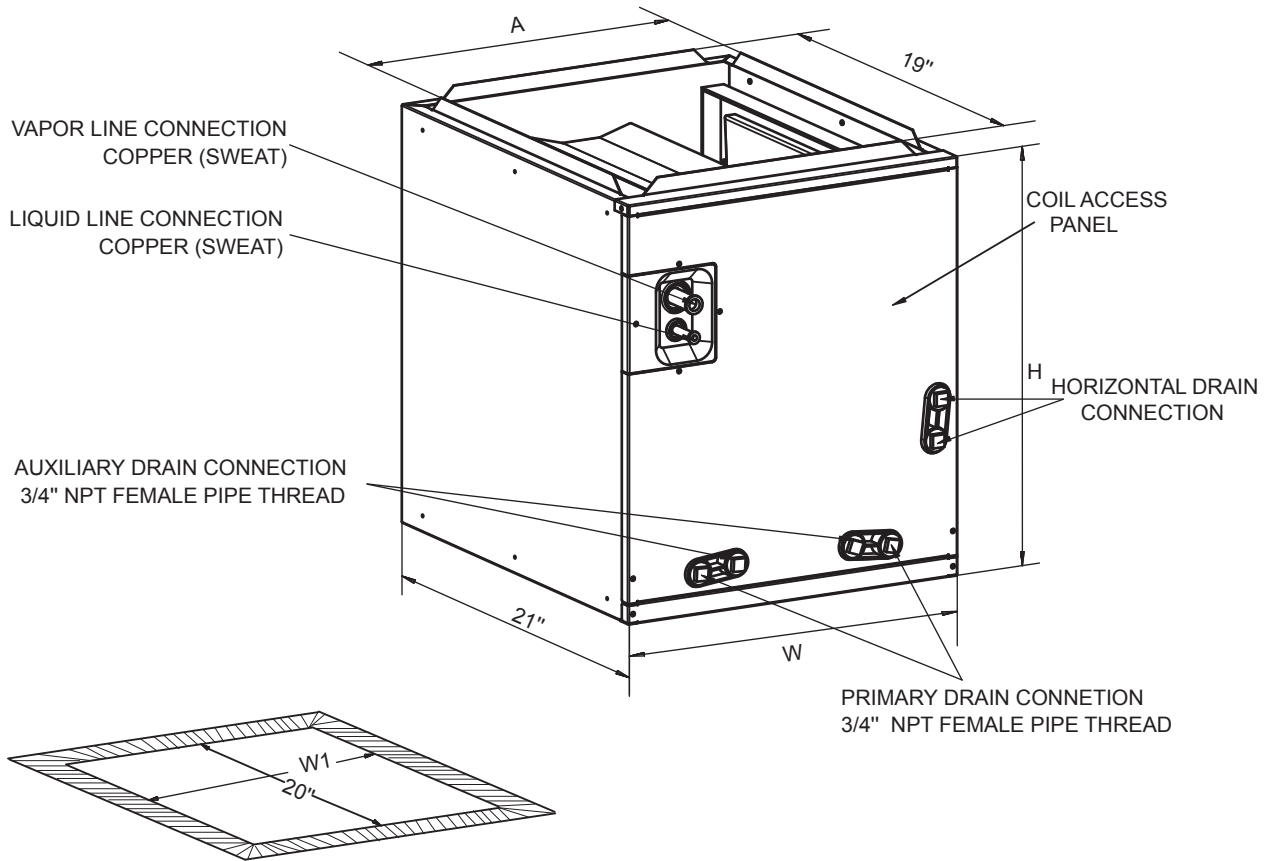

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC019AB1CAAA	508 (20)	445 (17-1/2)	407 (16)	419 (16-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC019AB1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	2 - 17
Face Area (sq. ft.)	3.27
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	22-3/4 x 20-1/2 x 24-3/8
Uncrated	20 x 17-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	51/47



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC019AB1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
374	547	715	835	954	1052	1146	1234

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC024AA1CAAA

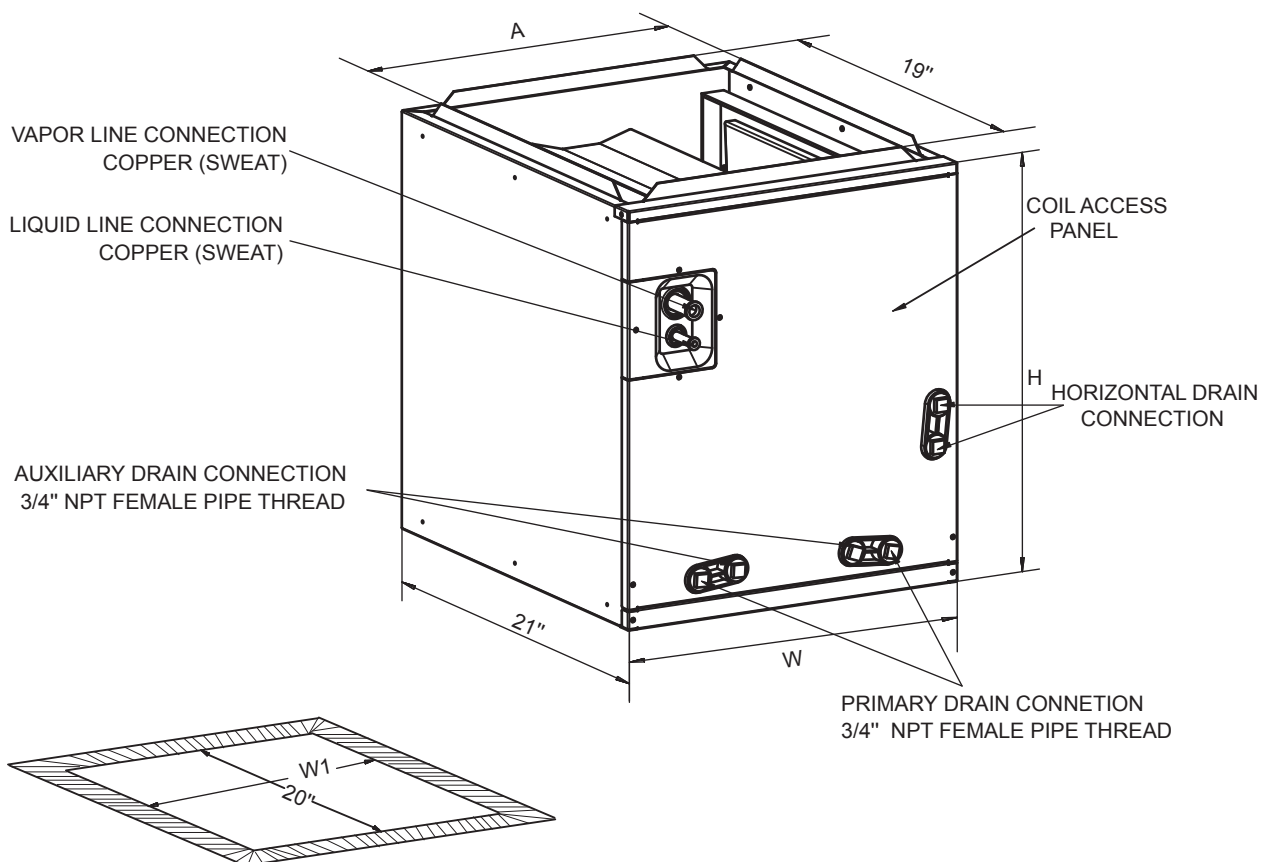

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC024AA1CAAA	660 (26)	368 (14-1/2)	330 (13)	343 (13-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC024AA1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	2 - 17
Face Area (sq. ft.)	5.13
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	28-3/4 x 17-1/2 x 24-3/8
Uncrated	26 x 14-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	61/57



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC024AA1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
366	545	696	805	916	1011	1100	1181

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC024BA1CAAA

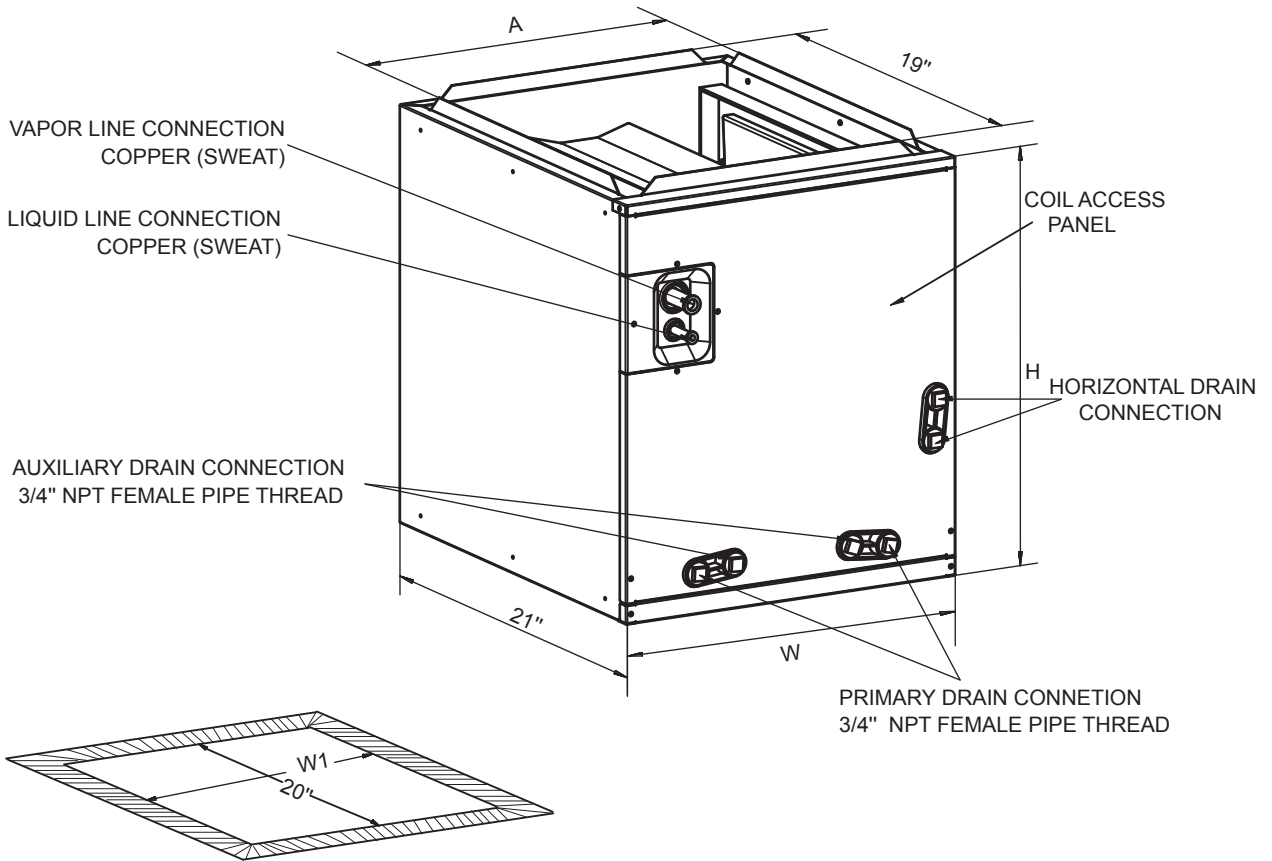

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC024BA1CAAA	508 (20)	368 (14-1/2)	330 (13)	343 (13-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC024BA1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	3 - 17
Face Area (sq. ft.)	0.85
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	22-5/8 x 17-1/2 x 25
Uncrated	20 x 14-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	48/42



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC024BA1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
373	549	706	821	925	1018	1109	1190

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC025AB1CAAA

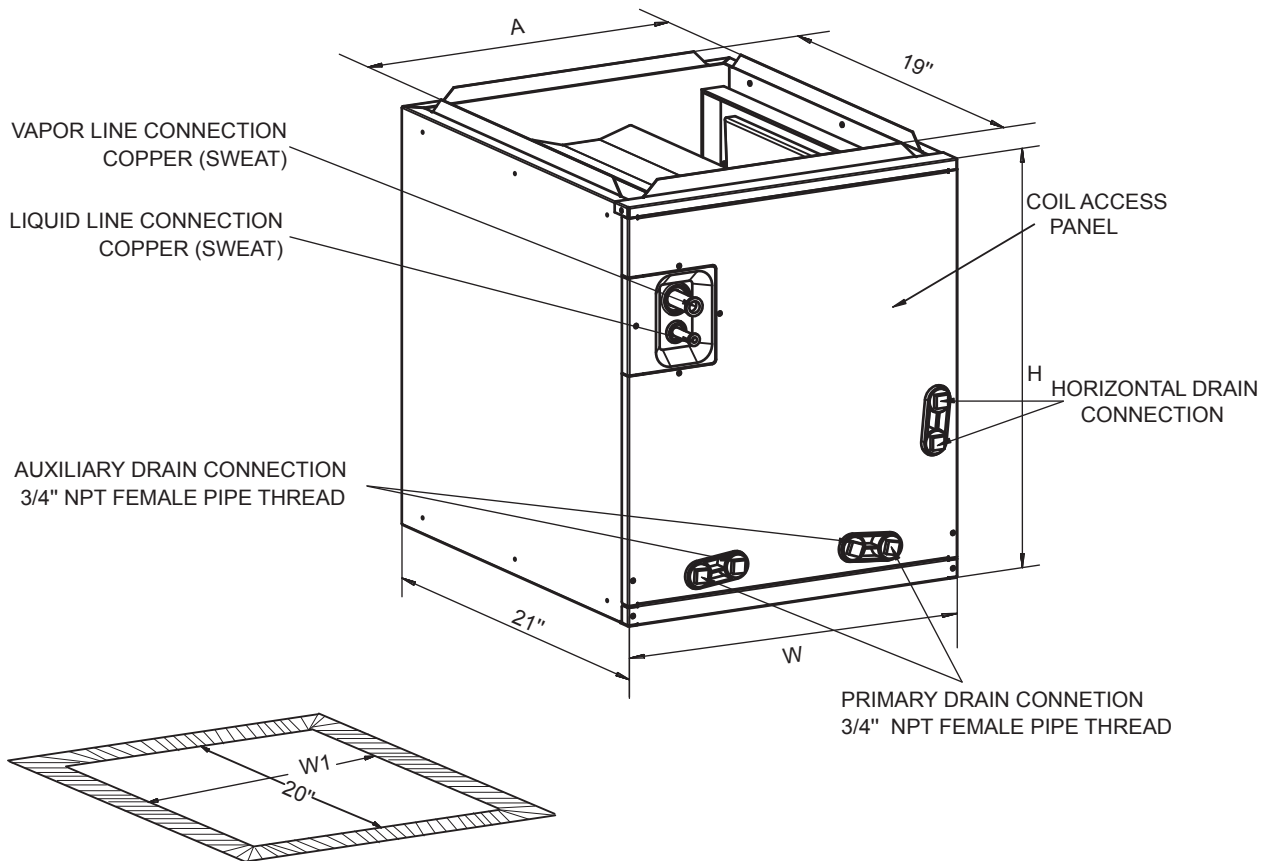

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC025AB1CAAA	508 (20)	445 (17-1/2)	407 (16)	419 (16-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC025AB1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	2 - 17
Face Area (sq. ft.)	3.73
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	22-3/4 x 20-1/2 x 24-3/8
Uncrated	20 x 17-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	52/49



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC025AB1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
392	597	764	896	1025	1133	1242	1331

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC025BB1CAAA

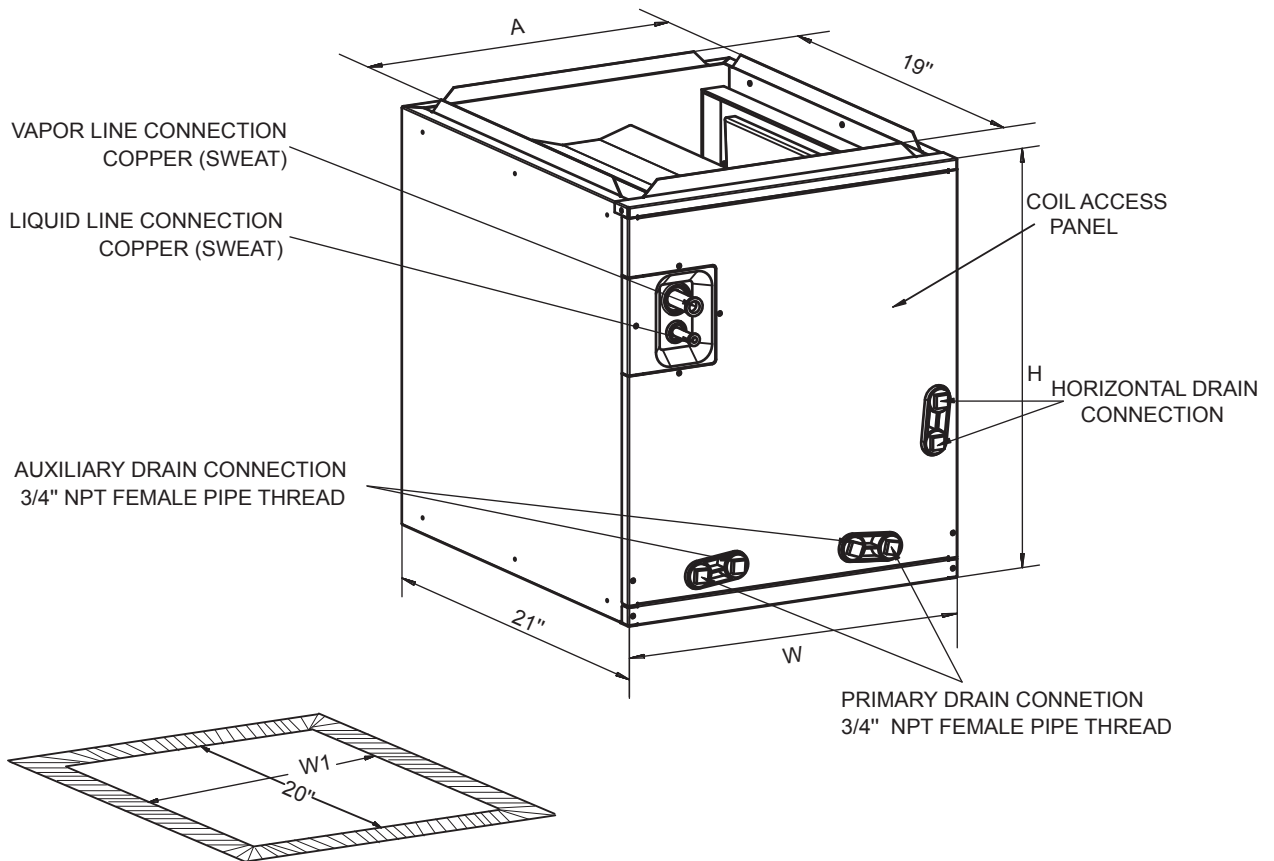

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC025BB1CAAA	508 (20)	445 (17-1/2)	407 (16)	419 (16-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC025BB1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	3 - 17
Face Area (sq. ft.)	1.01
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	22-5/8 x 20-5/8 x 25
Uncrated	20 x 17-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	52/46



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC025BB1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
391	617	785	925	1050	1163	1272	1367

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC028BA1CAAA

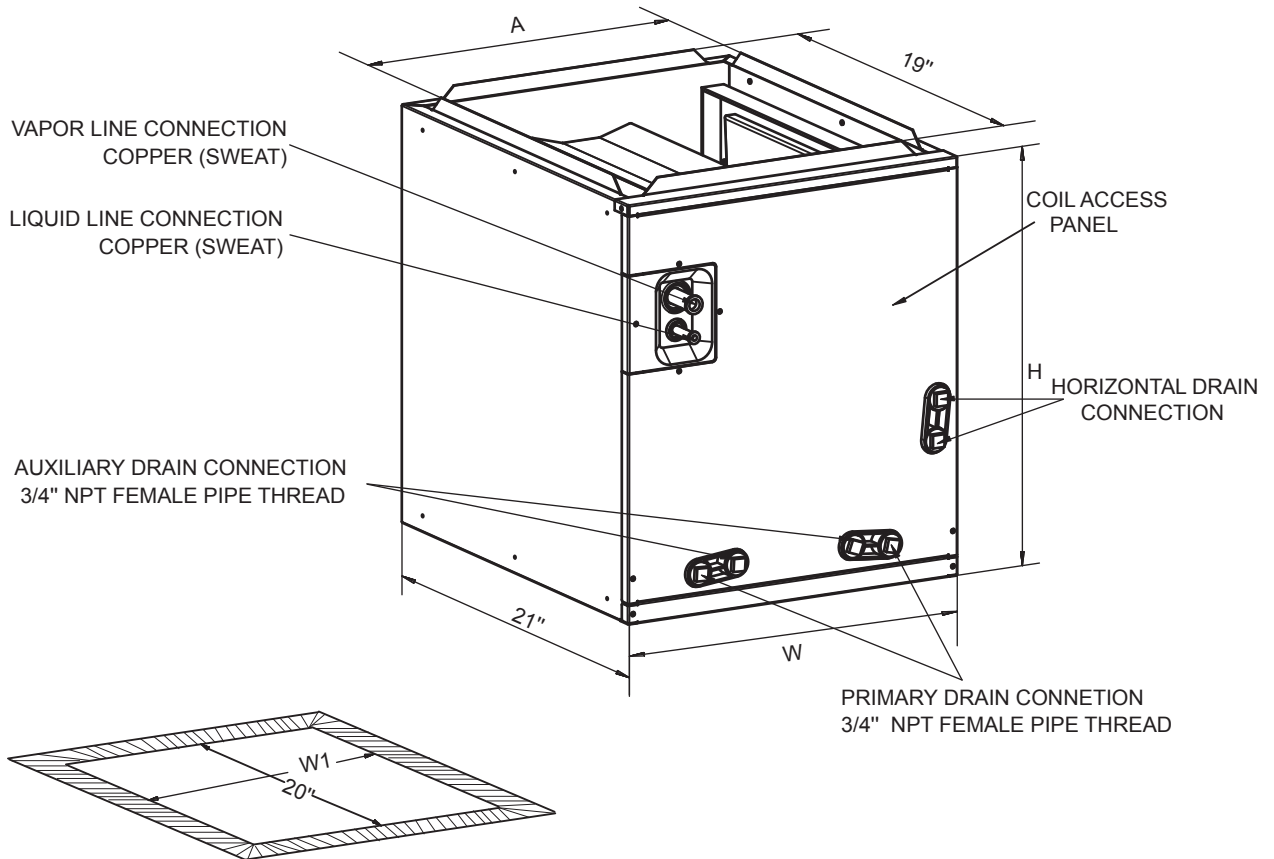

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC028BA1CAAA	660 (26)	368 (14-1/2)	330 (13)	343 (13-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC028BA1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	4 - 17
Face Area (sq. ft.)	0.85
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	28-1/2 x 17-5/8 x 25
Uncrated	26 x 14-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	63/56



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC028BA1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
373	541	677	789	895	984	1068	1148

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC030AA1CAAA

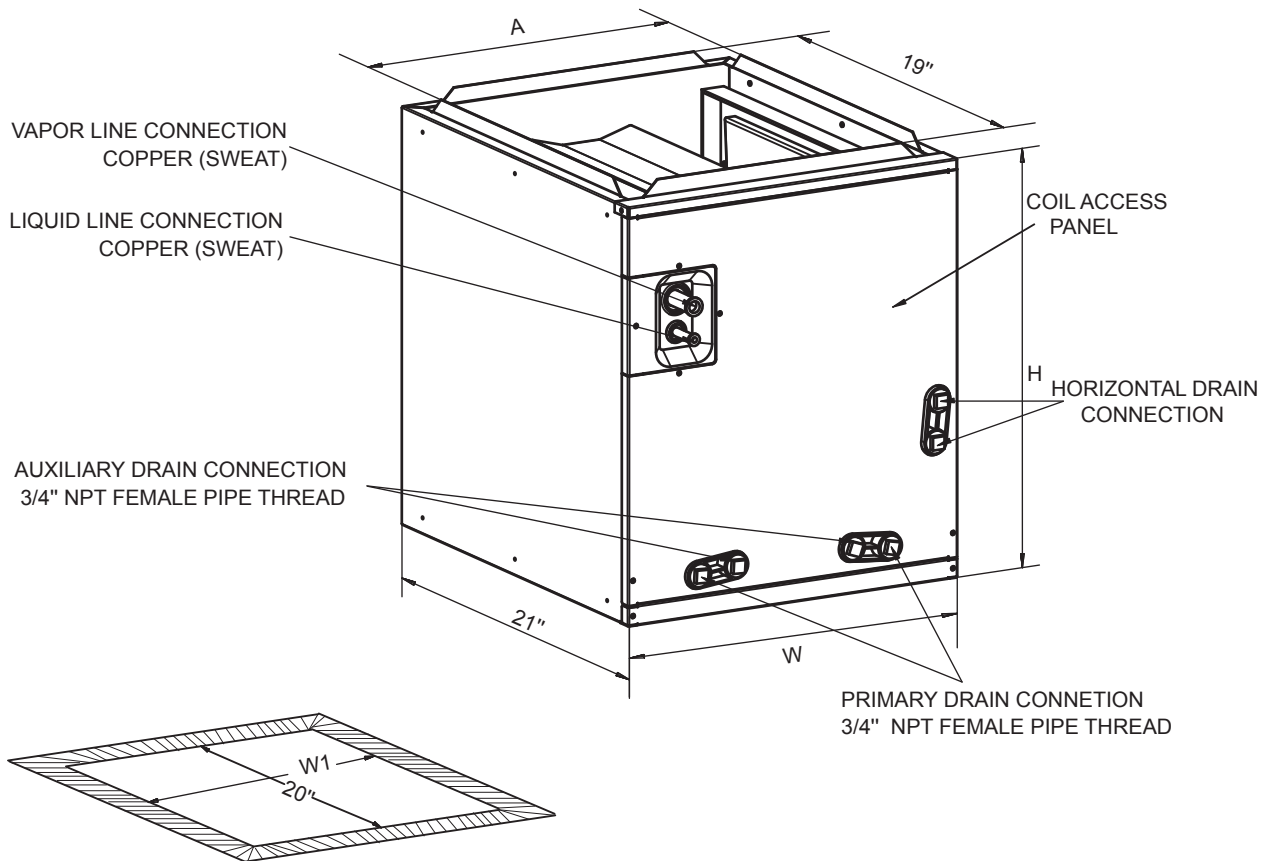

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC030AA1CAAA	660 (26)	368 (14-1/2)	330 (13)	343 (13-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC030AA1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	2 - 17
Face Area (sq. ft.)	5.13
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	28-3/4 x 17-1/2 x 24-3/8
Uncrated	26 x 14-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	61/57



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC030AA1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
366	545	696	805	916	1011	1100	1181

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC030BB1CAAA

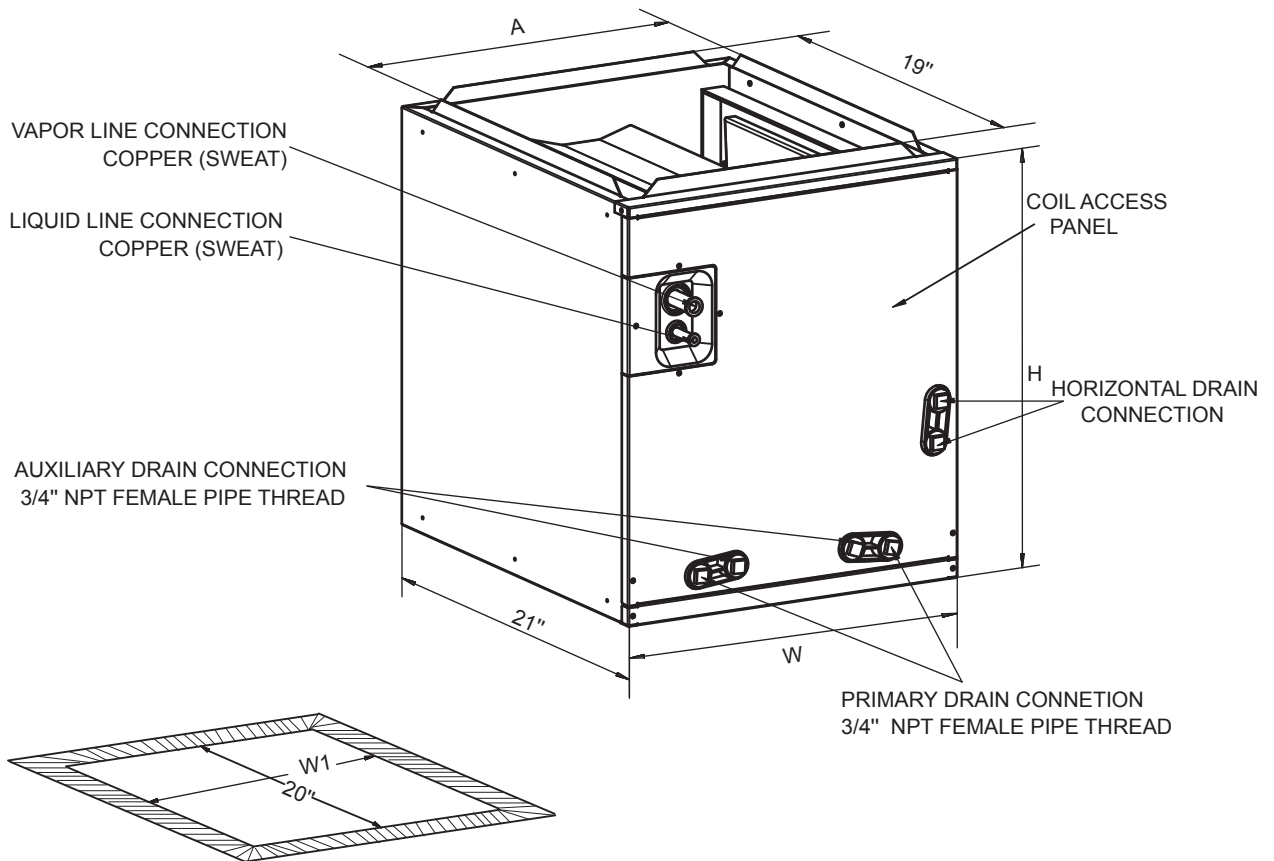

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC030BB1CAAA	660 (26)	445(17-1/2)	407 (16)	419 (16-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC030BB1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	4 - 17
Face Area (sq. ft.)	1.01
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	28-1/2 x 20-5/8 x 25
Uncrated	26 x 17-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	66/57



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC030BB1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
412	625	789	926	1054	1166	1275	1375

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC031AB1CAAA

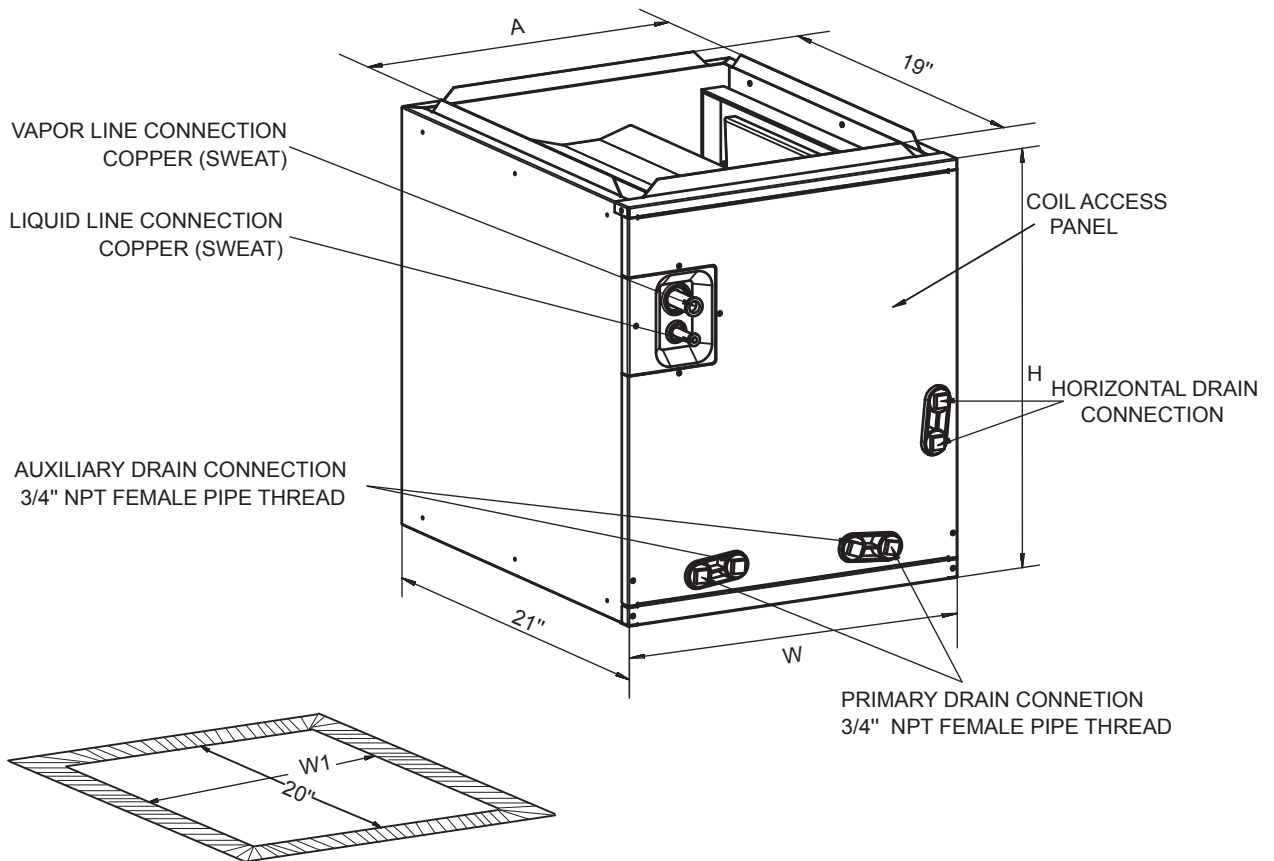

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC031AB1CAAA	508 (20)	445 (17-1/2)	407 (16)	419 (16-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC031AB1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	2 - 17
Face Area (sq. ft.)	3.73
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	22-3/4 x 20-1/2 x 24-3/8
Uncrated	20 x 17-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	53/49



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC031AB1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
392	597	764	896	1025	1133	1242	1331

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC032AB1CAAA

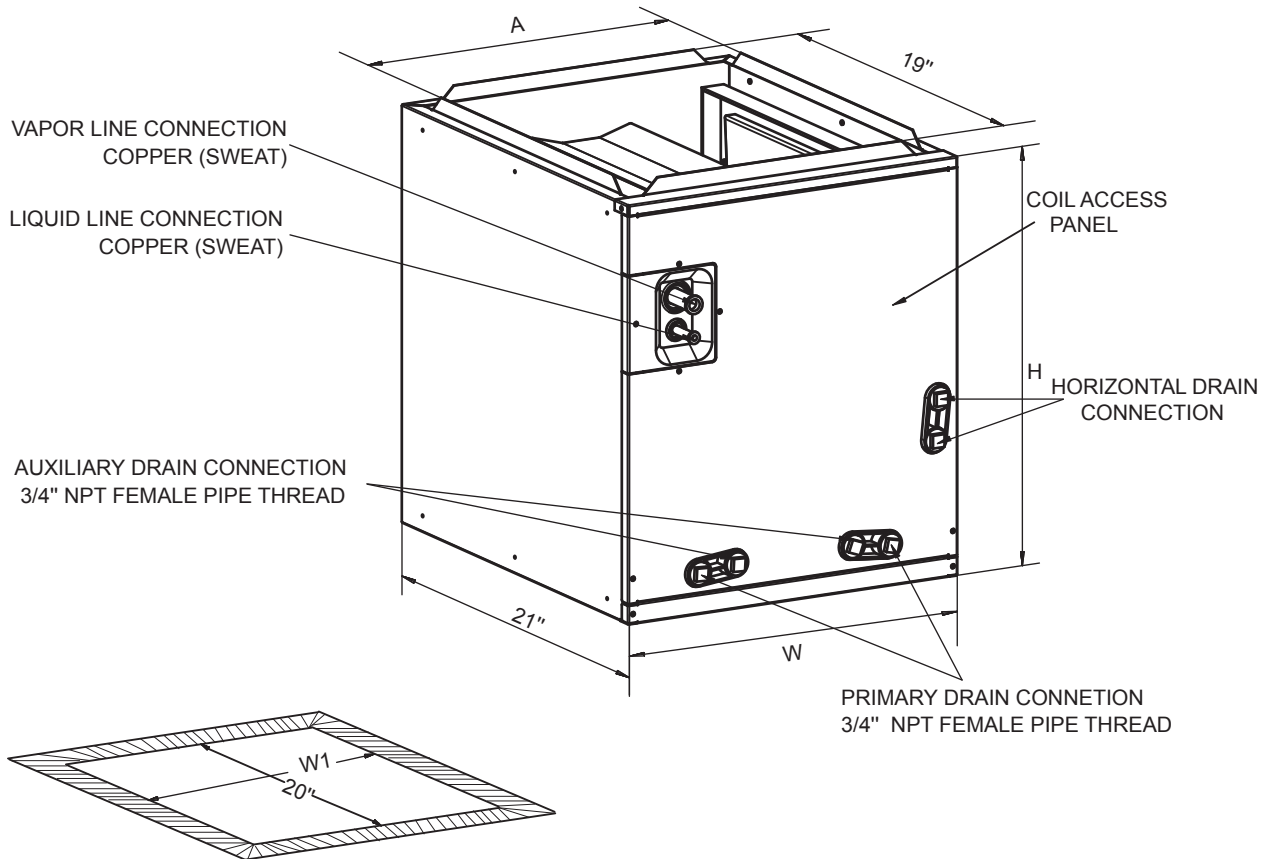

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC032AB1CAAA	762 (30)	445 (17-1/2)	407 (16)	419 (16-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC032AB1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	2 - 17
Face Area (sq. ft.)	6.07
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	32-7/8 x 20-1/2 x 24-3/8
Uncrated	30 x 17-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	75/70



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC032AB1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
482	722	886	1025	1164	1284	1393	1496

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC035AB1CAAA

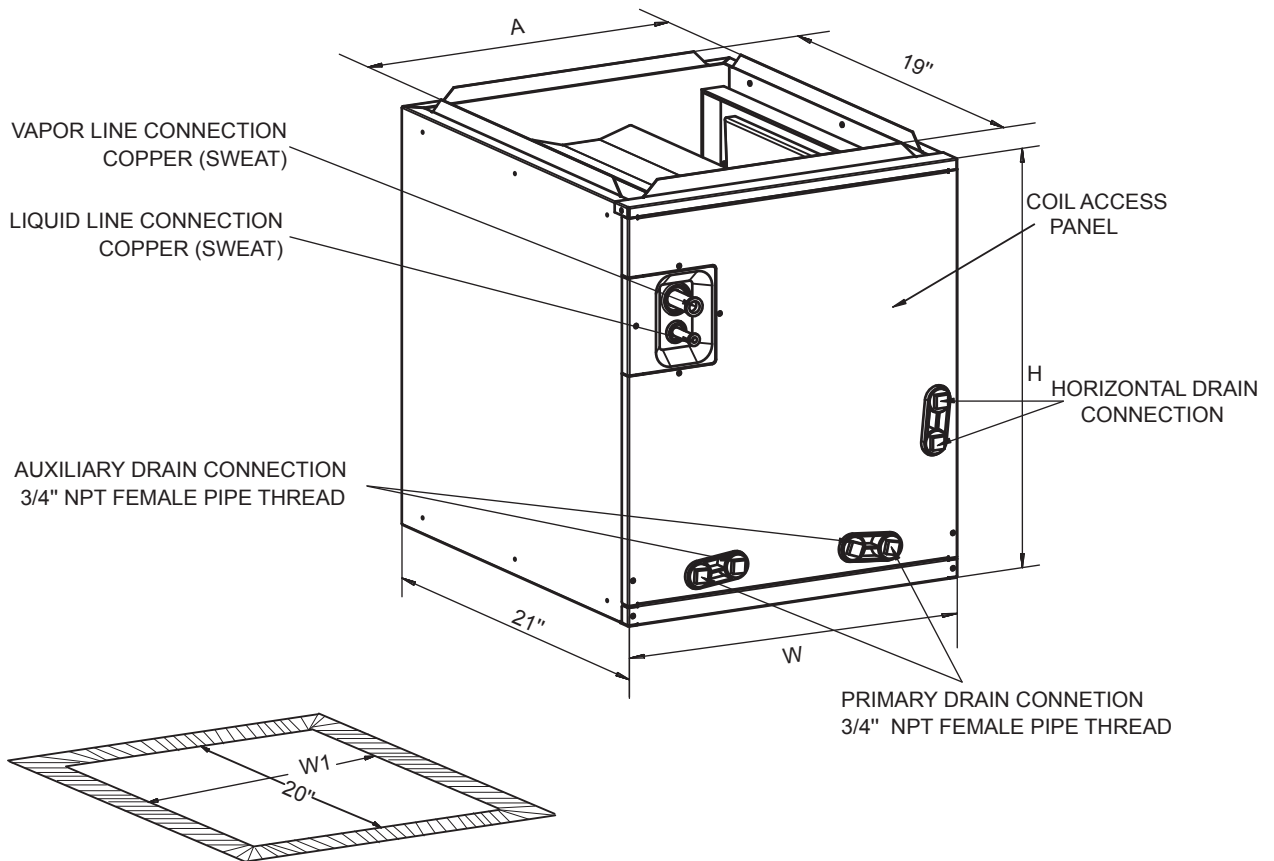

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC035AB1CAAA	762 (30)	445 (17-1/2)	407 (16)	419 (16-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC035AB1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	3 - 17
Face Area (sq. ft.)	6.07
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	32-7/8 x 20-1/2 x 24-3/8
Uncrated	30 x 17-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	83/79



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC035AB1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
362	556	690	810	931	1034	1131	1226

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC035BA1CAAA

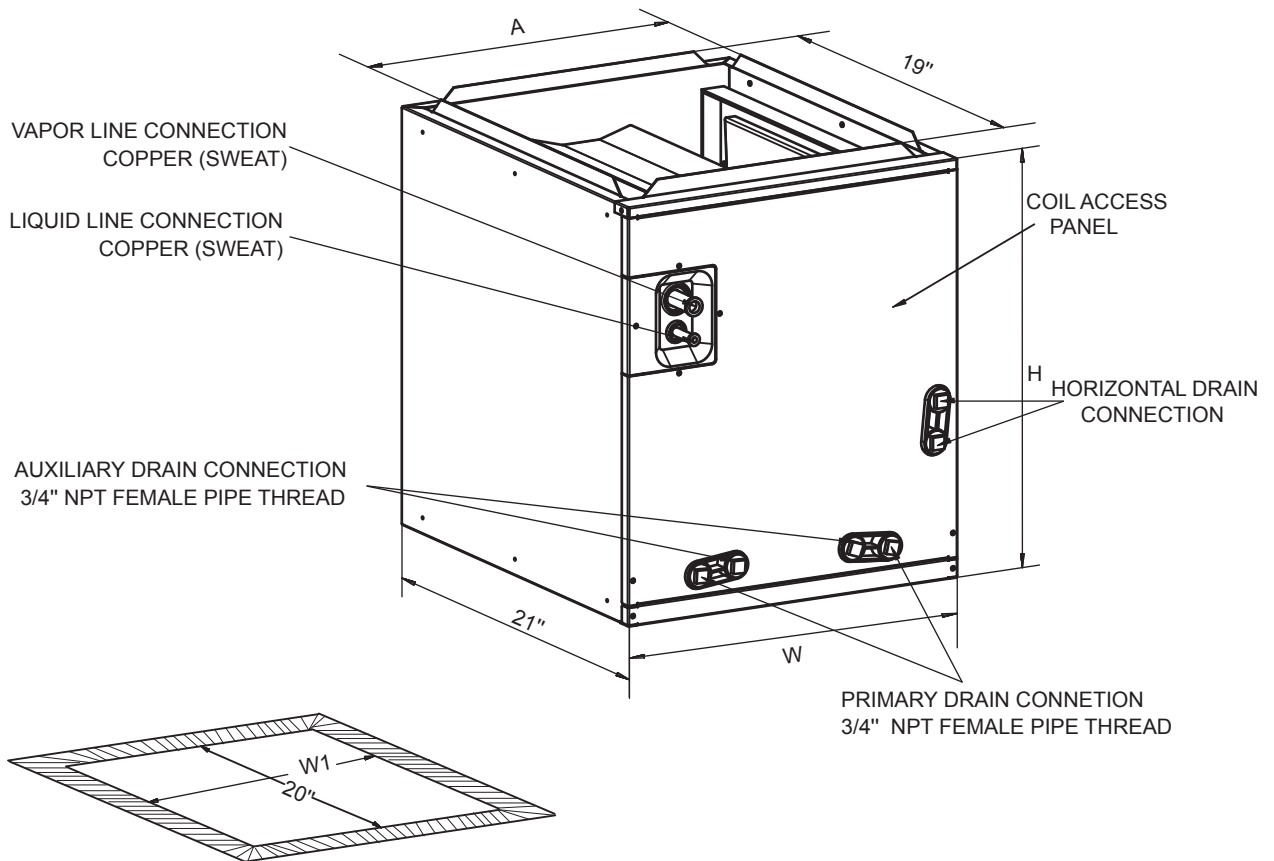

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC035BA1CAAA	508 (20)	368 (14-1/2)	330 (13)	343 (13-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC035BA1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	4 - 17
Face Area (sq. ft.)	0.85
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	22-5/8 x 17-5/8 x 25
Uncrated	20 x 14-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	54/47



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC035BA1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
320	506	634	741	850	933	1019	1095

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC035BB1CAAA

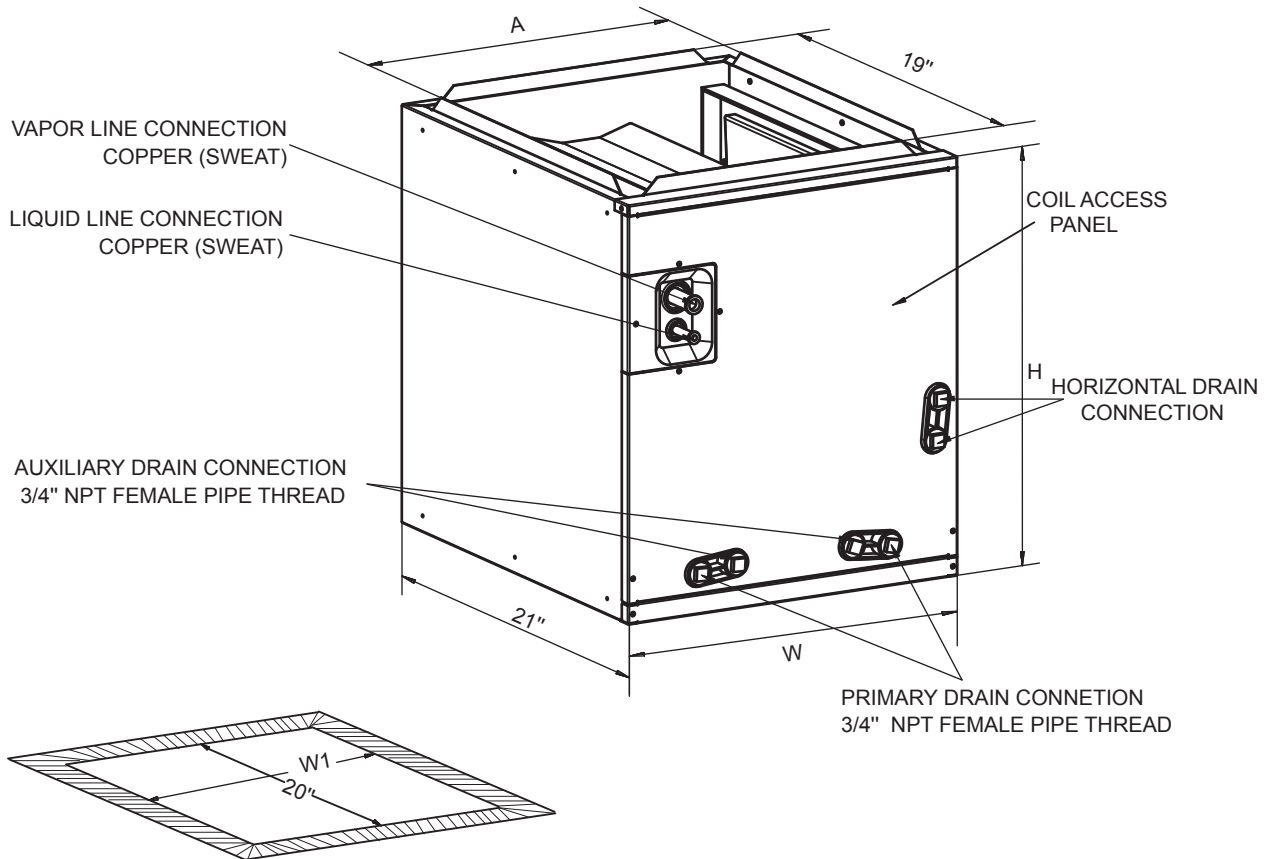

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC035BB1CAAA	508 (20)	445 (17-1/2)	407 (16)	419 (16-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC035BB1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	4 - 17
Face Area (sq. ft.)	1.01
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	22-5/8 x 20-5/8 x 25
Uncrated	20 x 17-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	56/48.5



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC035BB1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
350	544	710	840	958	1059	1158	1248

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC035BC1CAAA

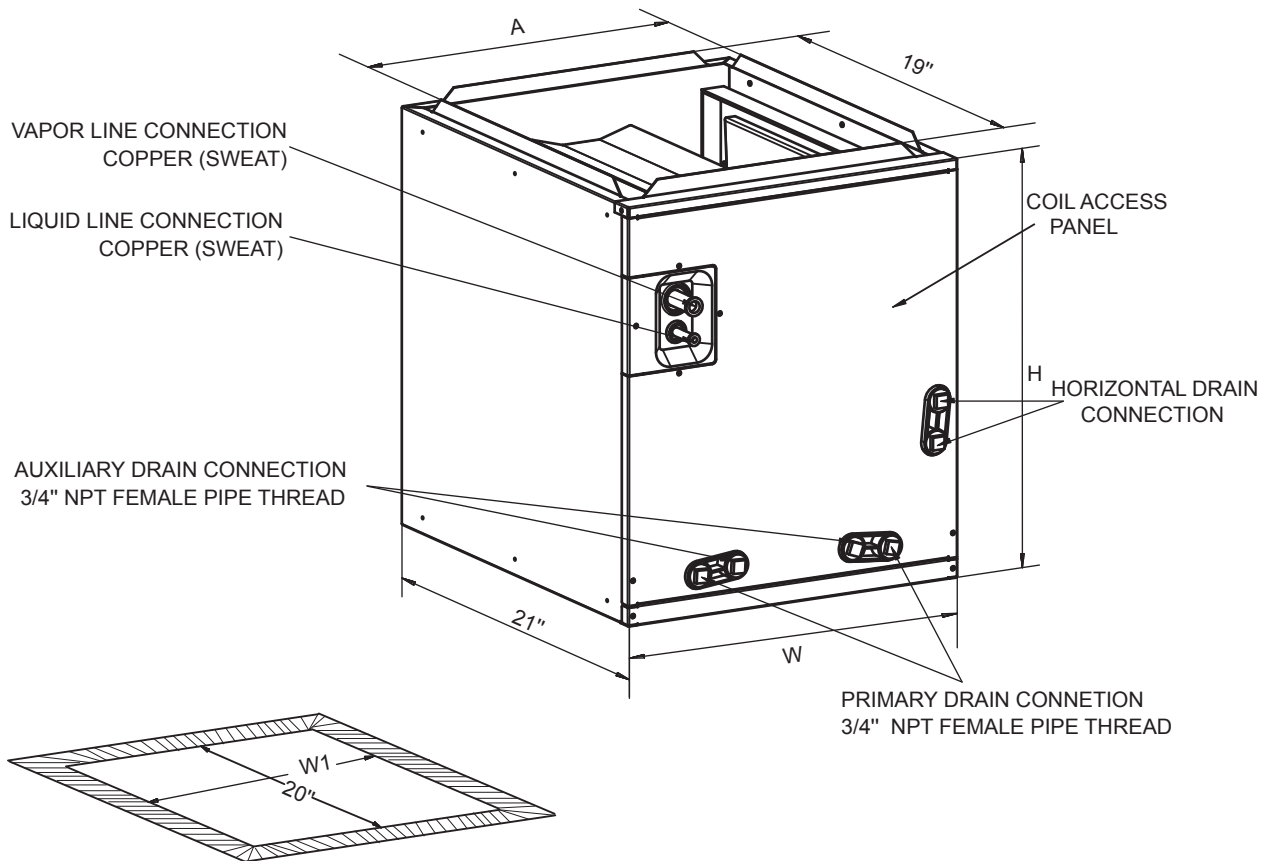

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC035BC1CAAA	508 (20)	533 (21)	495 (19-1/2)	508 (20)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC035BC1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	4 - 17
Face Area (sq. ft.)	1.23
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	22-5/8 x 24-1/8 x 25
Uncrated	20 x 21 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	58/51



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC035BC1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
411	637	813	964	1095	1220	1336	1441

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC036AC1CAAA

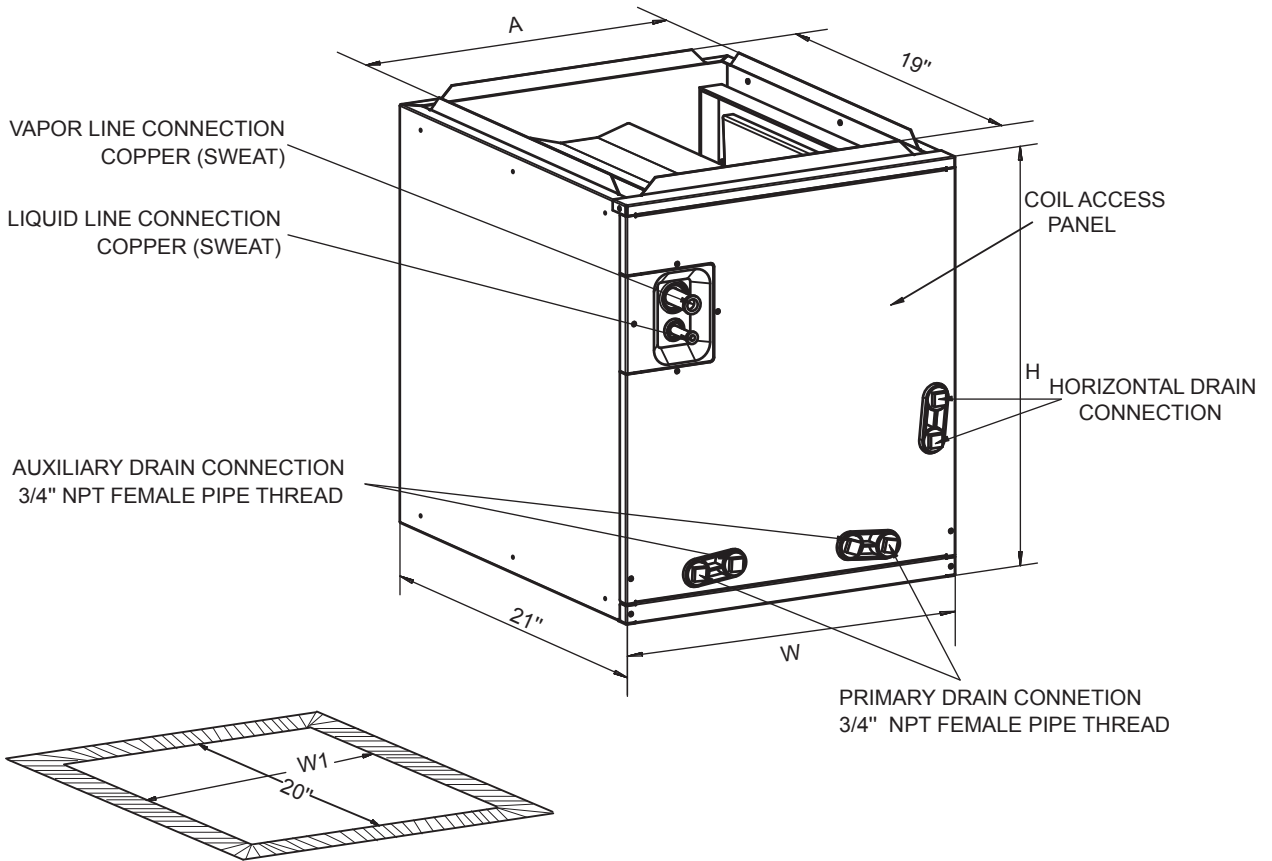

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC036AC1CAAA	762 (30)	533 (21)	495 (19-1/2)	508 (20)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC036AC1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	2 - 17
Face Area (sq. ft.)	6.07
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	32-7/8 x 24-1/2 x 24-3/8
Uncrated	30 x 21 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	77/72



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC036AC1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
495	751	962	1130	1297	1432	1564	1681

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC036BC1CAAA

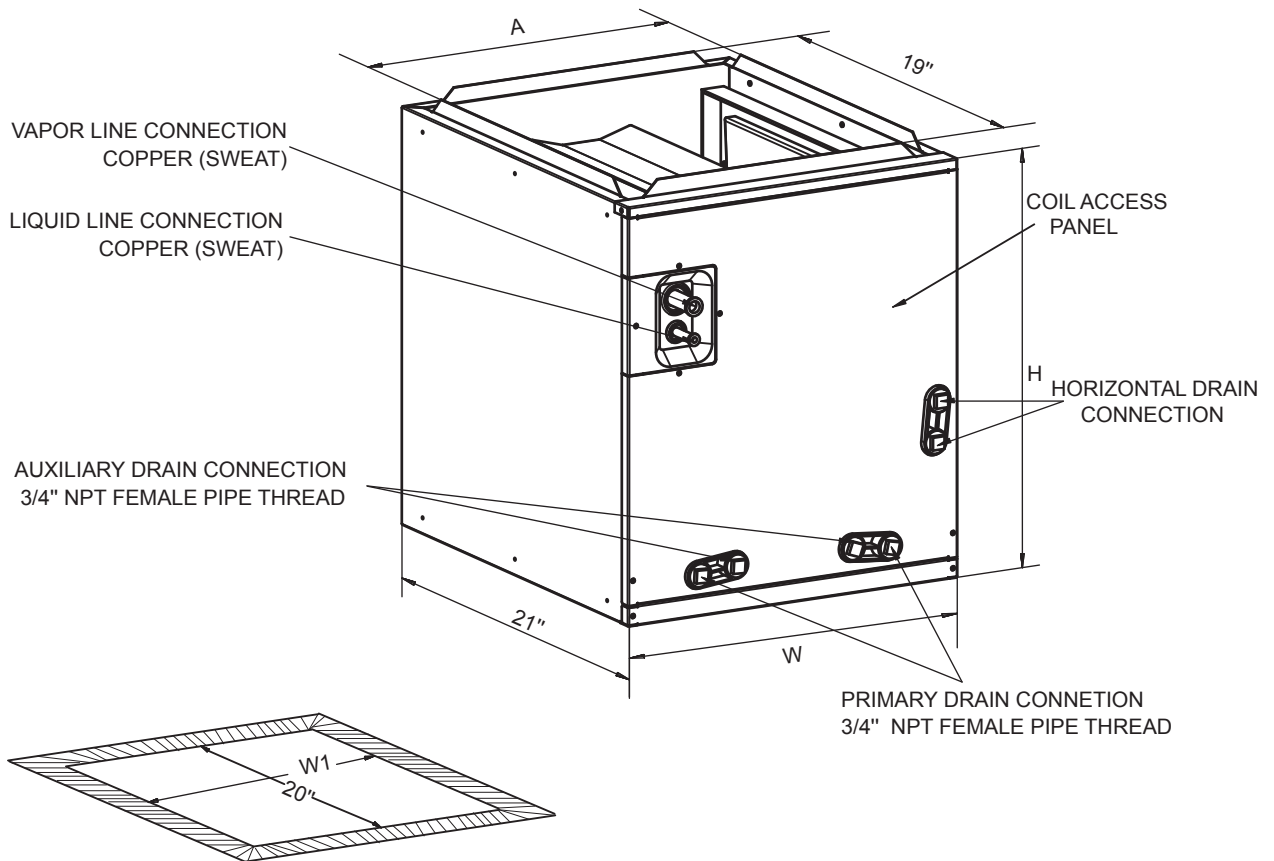

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC036BC1CAAA	660 (26)	533 (21)	495 (19-1/2)	508 (20)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC036BC1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	4 - 17
Face Area (sq. ft.)	1.23
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	28-1/2 x 24-1/8 x 25
Uncrated	26 x 21 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	70.5/62



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC036BC1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
438	679	874	1035	1183	1320	1455	1568

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC042AC1CAAA

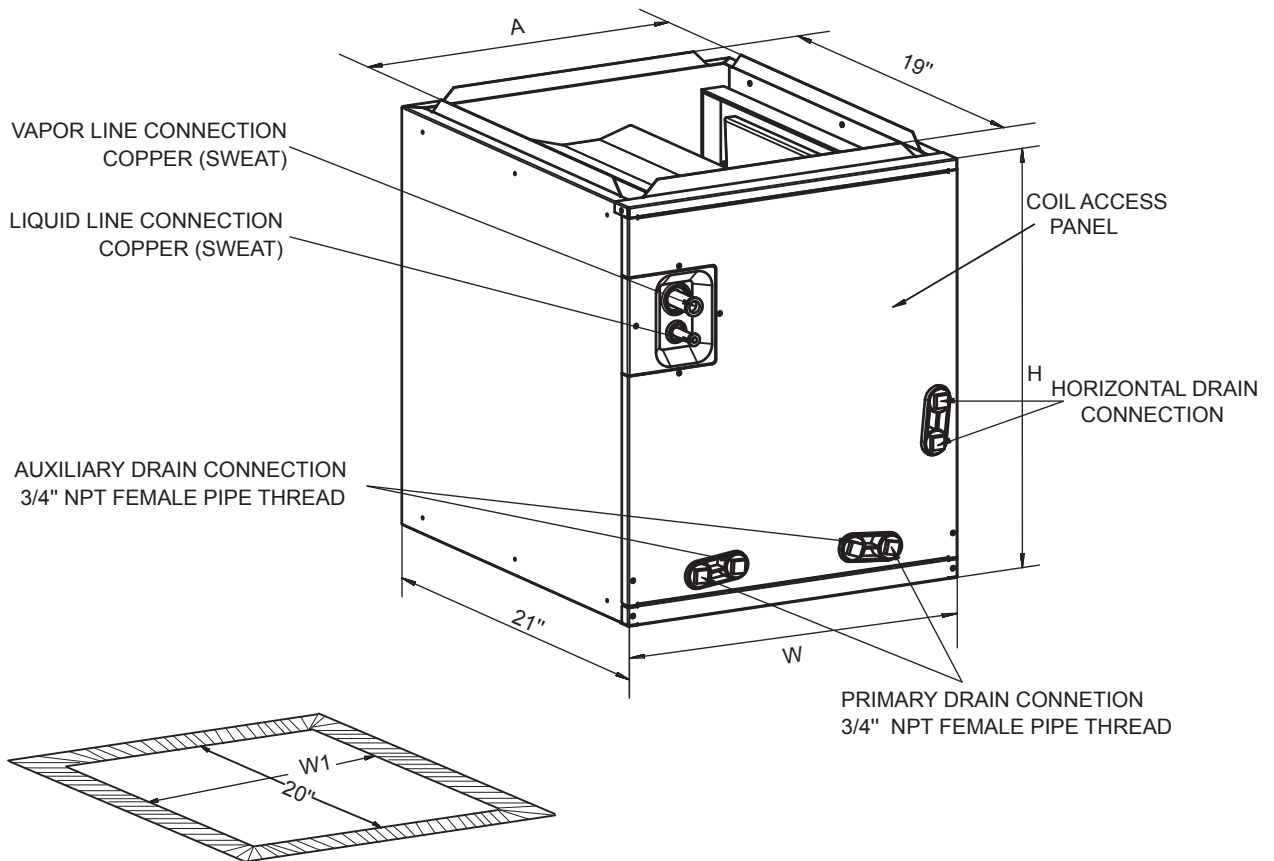

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC042AC1CAAA	762 (30)	533 (21)	495 (19-1/2)	508 (20)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC042AC1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	2 - 17
Face Area (sq. ft.)	6.07
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	3/4
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	32-7/8 x 24-1/2 x 24-3/8
Uncrated	30 x 21 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	77/72



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC042AC1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
495	751	962	1130	1297	1432	1564	1681

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC042BB 1CAAA

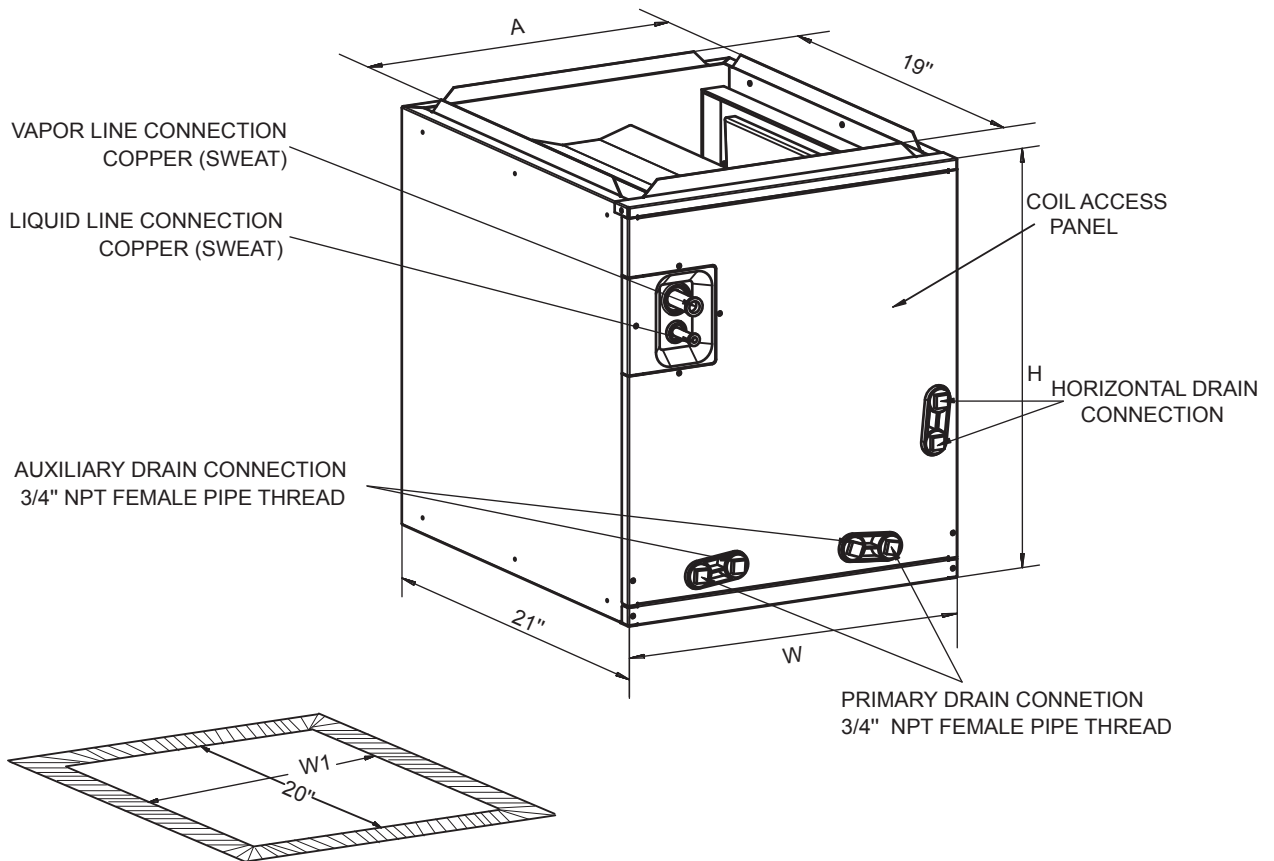

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC042BB 1CAAA	660 (26)	445 (17-1/2)	407 (16)	419 (16-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC042BB1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	4 - 17
Face Area (sq. ft.)	1.01
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	28-1/2 x 20-5/8 x 25
Uncrated	26 x 17-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	70.5/64



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC042BB1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
420	655	823	968	1095	1211	1321	1426

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC048AB1CAAA

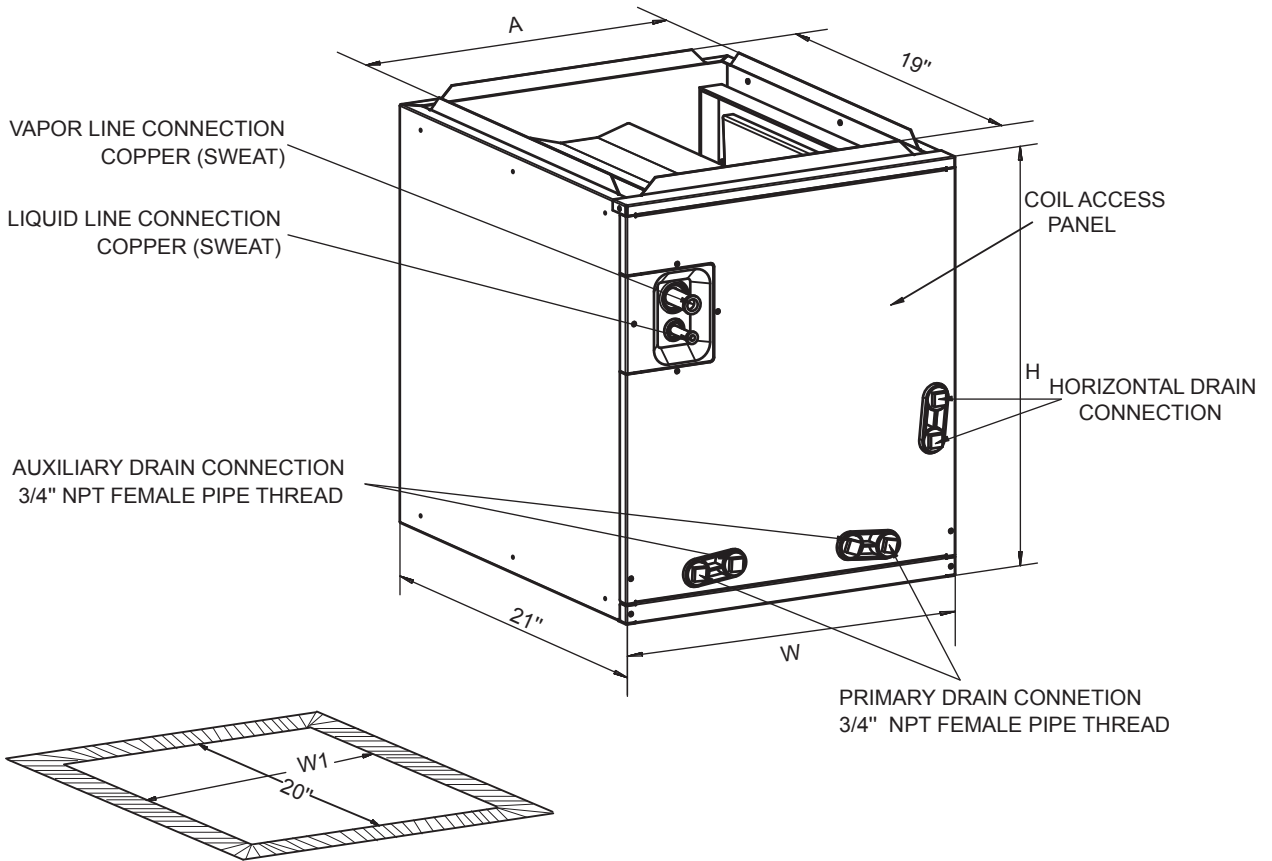

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC048AB1CAAA	762 (30)	445 (17-1/2)	407 (16)	419 (16-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC048AB1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	3 - 17
Face Area (sq. ft.)	6.07
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	32-7/8 x 20-1/2 x 24-3/8
Uncrated	30 x 17-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	83/79



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC048AB1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
362	556	690	810	931	1034	1131	1226

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC048BC1CAAA

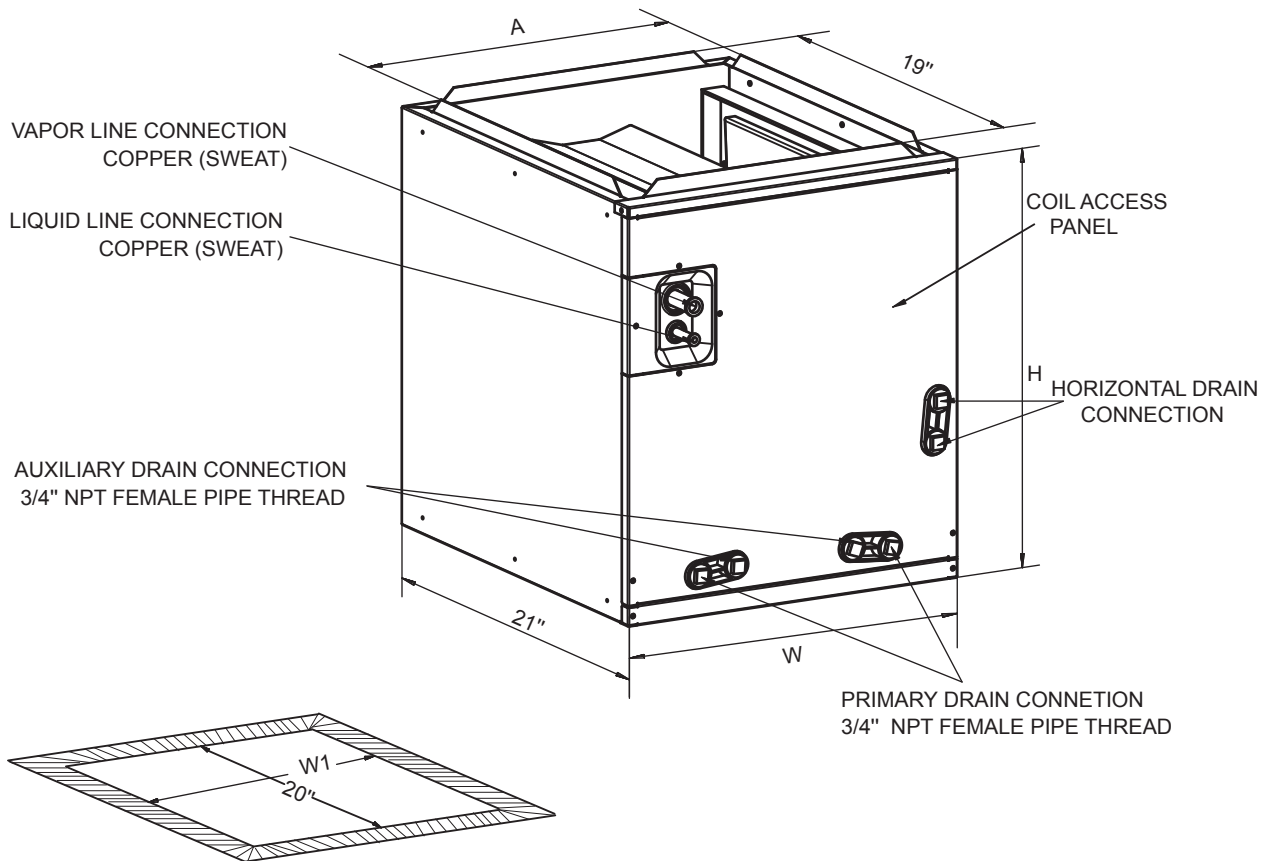

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC048BC1CAAA	660 (26)	533 (21)	495 (19-1/2)	508 (20)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC048BC1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	4 - 17
Face Area (sq. ft.)	1.23
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	28-1/2 x 24-1/8 x 25
Uncrated	26 x 21 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	74/68



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC048BC1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
492	759	956	1110	1274	1428	1551	1678

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC049AC1CAAA

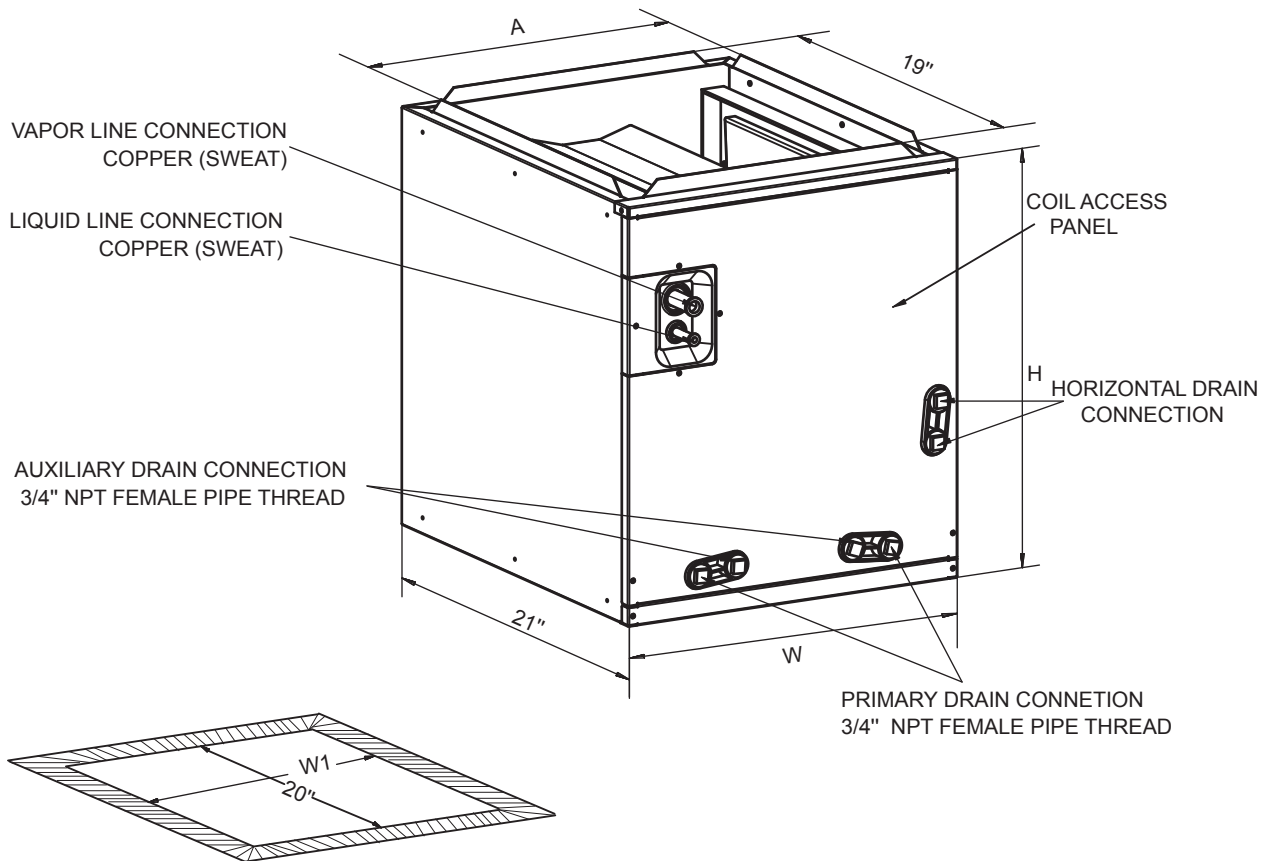

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC049AC1CAAA	762 (30)	533 (21)	495 (19-1/2)	508 (20)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC049AC1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	3 - 17
Face Area (sq. ft.)	6.07
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	32-7/8 x 24-1/2 x 24-3/8
Uncrated	30 x 21 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	88/83



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC049AC1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
495	751	962	1130	1297	1432	1564	1681

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC049BC1CAAA

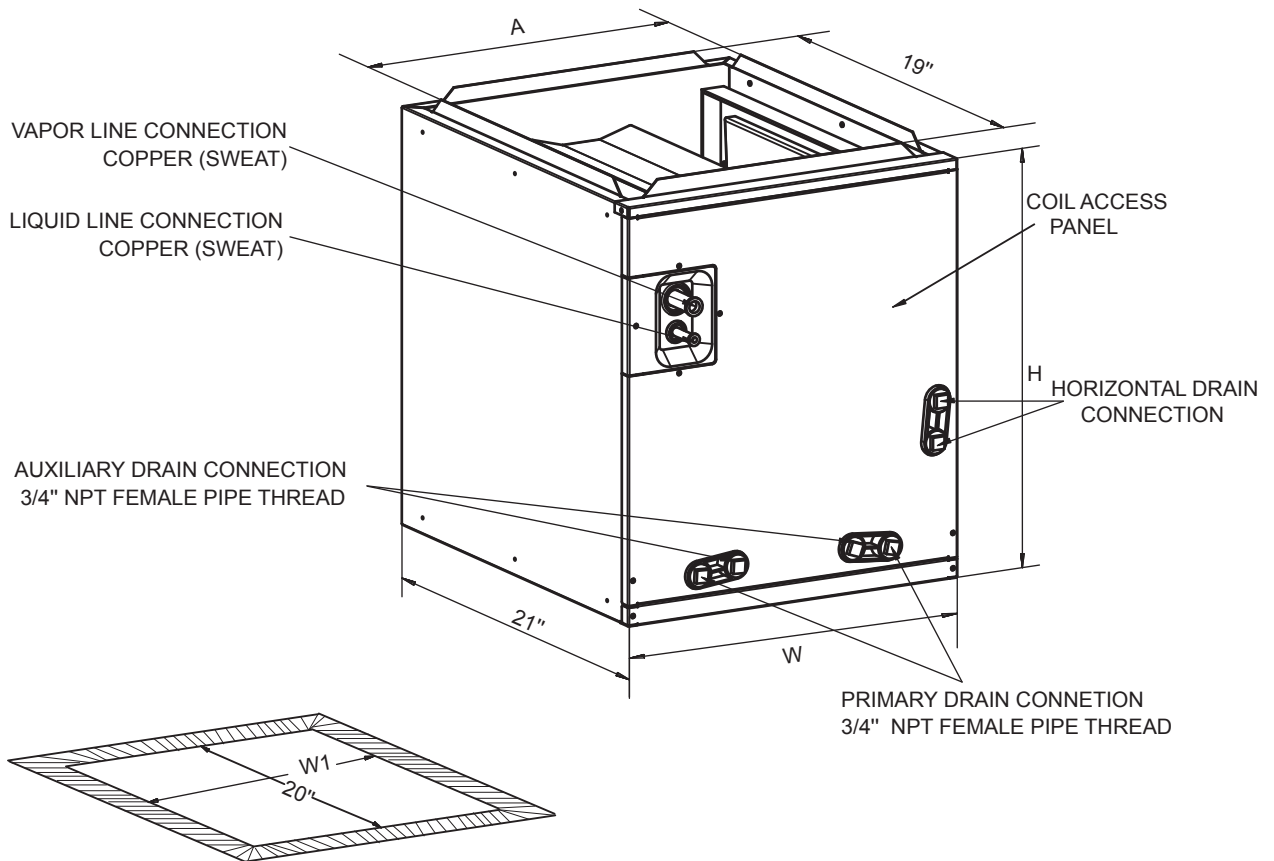

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC049BC1CAAA	762 (30)	533 (21)	495 (19-1/2)	508 (20)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC049BC1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	3 - 17
Face Area (sq. ft.)	1.23
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	32-7/8 x 24-1/8 x 25
Uncrated	30 x 21 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	88/83



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC049BC1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
495	751	962	1130	1297	1432	1564	1681

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC060AC1CAAA

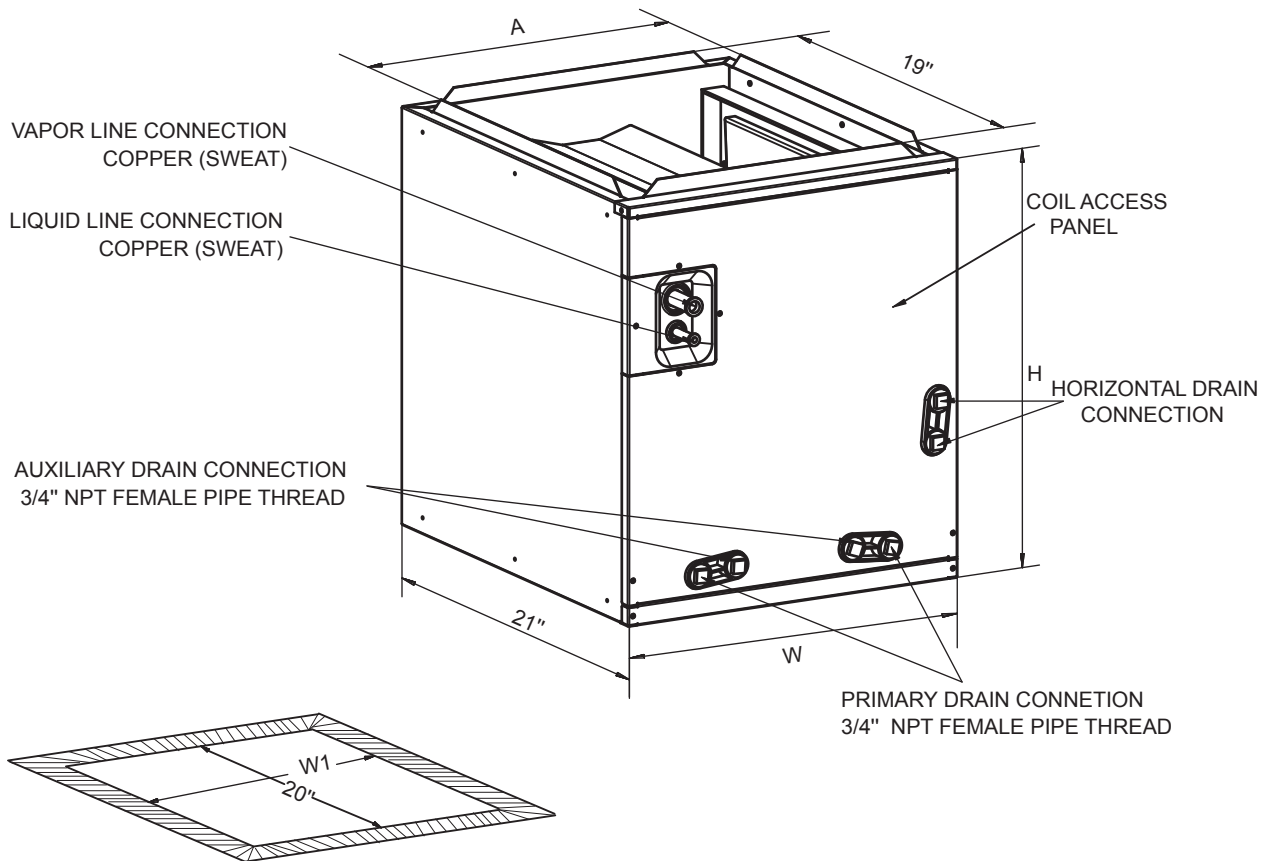

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC060AC1CAAA	762 (30)	533 (21)	495 (19-1/2)	508 (20)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC060AC1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	3 - 17
Face Area (sq. ft.)	6.07
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	32-7/8 x 24-1/2 x 24-3/8
Uncrated	30 x 21 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	88/83



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC060AC1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
495	751	962	1130	1297	1432	1564	1681

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC060BD 1CAAA

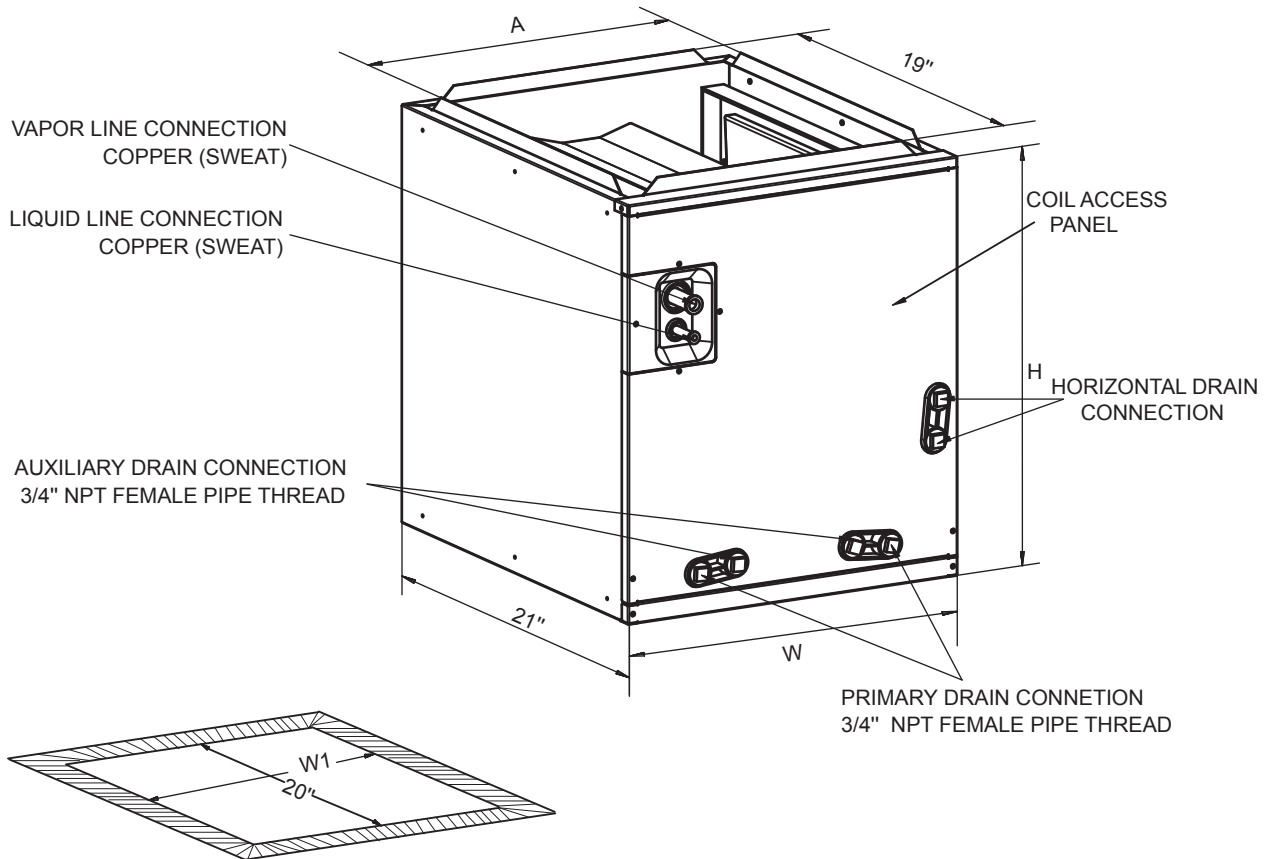

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC060BD 1CAAA	660 (26)	622 (24-1/2)	584 (23)	597(23-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC060BD1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	4 - 17
Face Area (sq. ft.)	1.63
Tube Size (in.)	9/32
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	28-1/2 x 27-1/2 x 25
Uncrated	26 x 24-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	79.5/71.5



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC060BD1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
544	837	1075	1276	1473	1634	1797	1933

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC061AD1CAAA

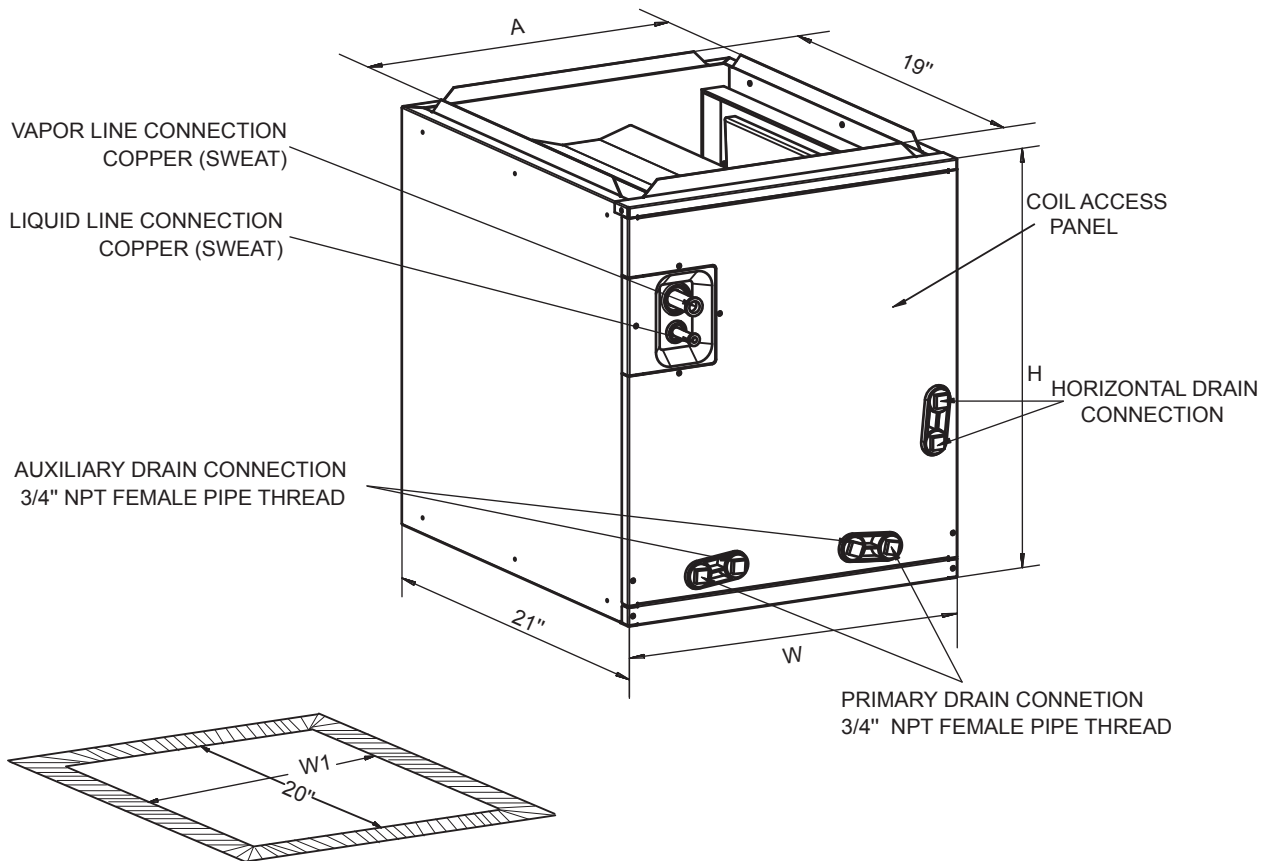

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC061AD1CAAA	762 (30)	622 (24-1/2)	584 (23)	597(23-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC061AD1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	3 - 17
Face Area (sq. ft.)	6.07
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	32-7/8 x 27-1/2 x 24-3/8
Uncrated	30 x 24-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	92/87



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC061AD1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
526	838	1097	1305	1499	1663	1814	1952

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- ARI Certified and UL Listed.

Ameristar




The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.

TAG: _____

SUBMITTAL

Cased A-coil

M4CXC061BD1CAAA

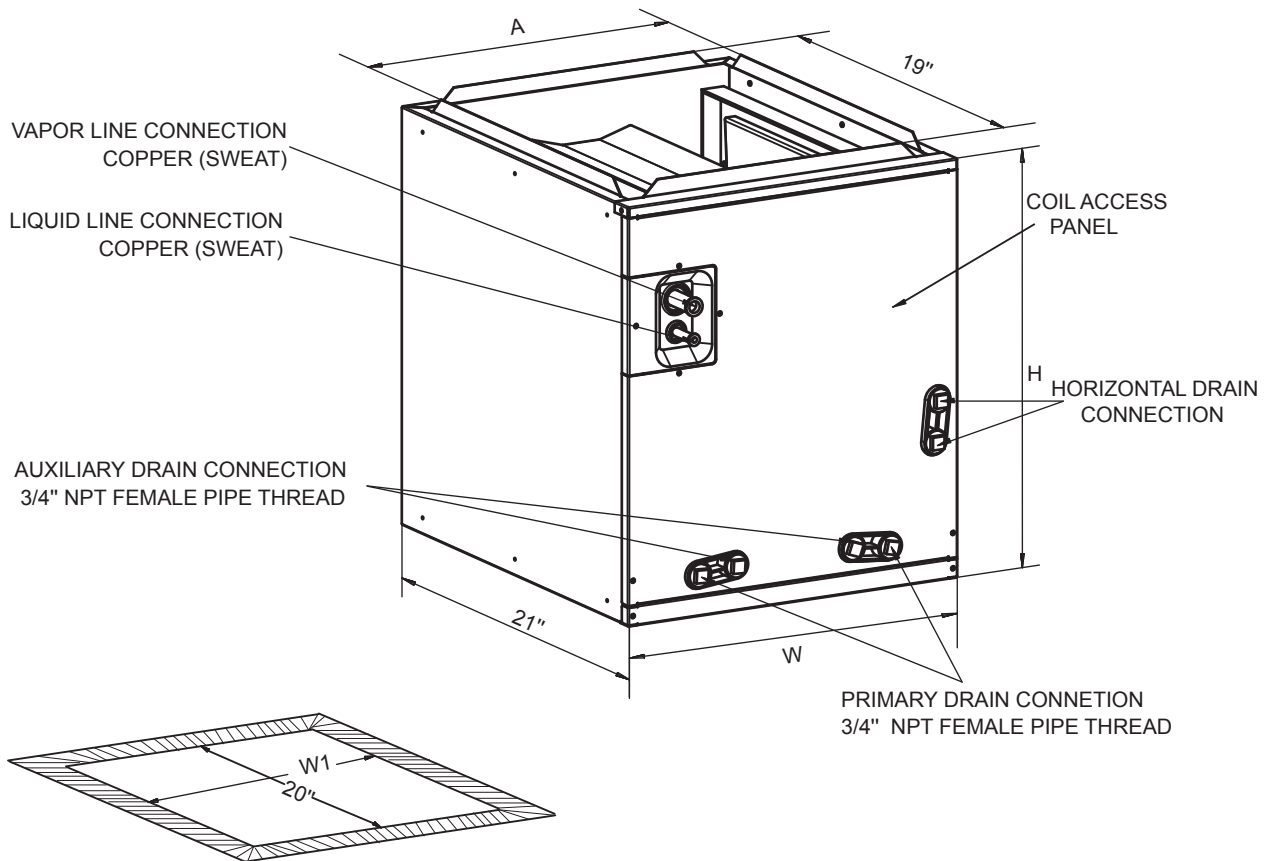

NOTE: All dimensions are in mm/inches.

Model	H	W	A	W1
M4CXC061BD1CAAA	762 (30)	622 (24-1/2)	584 (23)	597(23-1/2)

PRODUCT SPECIFICATIONS

PRODUCT SPECIFICATIONS

MODEL	M4CXC061BD1CAAA
RATINGS	See O.D. Specifications
INDOOR COIL — Type	Plate Fin
Rows — F.P.I.	3 - 17
Face Area (sq. ft.)	1.63
Tube Size (in.)	3/8
Refrigerant Control	Orifice
Drain Conn. Size (in.)	3/4 NPT
DUCT CONNECTIONS	See Outline Drawing
REFRIGERANT	R-410A
Ref. Line Connections	Brazed
Coupling or Conn. Size — in. Gas	7/8
Coupling or Conn. Size — in. Liq.	3/8
DIMENSIONS	H x W x D
Crated (In.)	32-7/8 x 27-1/2 x 24-3/8
Uncrated	30 x 24-1/2 x 21
WEIGHT	
Shipping (Lbs.)/Net (Lbs.)	92/87



PRESSURE DROP CHARACTERISTICS FOR COIL							
M4CXC061BD1CAAA							
PRESSURE DROP (INCHES OF WATER)							
0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4
526	838	1097	1305	1499	1663	1814	1952

Mechanical Specifications

- Compatible with R410A and R22 refrigerants.
- Advanced-design blue-enhanced aluminum fins bonded to inner-groove copper pipe.
- Foil-faced thermal insulation prevents sweating.
- Condensate drain pans are built from high-grade, heat-resistant and corrosion-free thermal set material.
- Coils match Midea unitary products and many brand-name, popular gas furnaces and split systems.
- ARI Certified and UL Listed.

Ameristar



The manufacturer has a policy of continuous product and product data improvement and it reserves the right to change design and specification without notice.