


# Submittal

## Communicating Downflow/Horizontal Right Direct/Non-Direct Vent Modulating Gas Furnace with Variable Speed Inducer


TDHMD120BCV5VB

ADHMD120BCV5VB

\*DHM

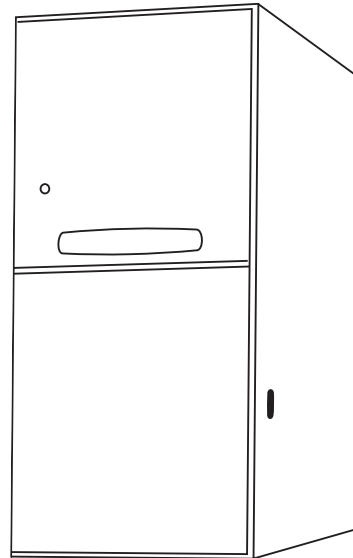

**Note:** "Graphics in this document are for representation only.  
Actual model may differ in appearance."

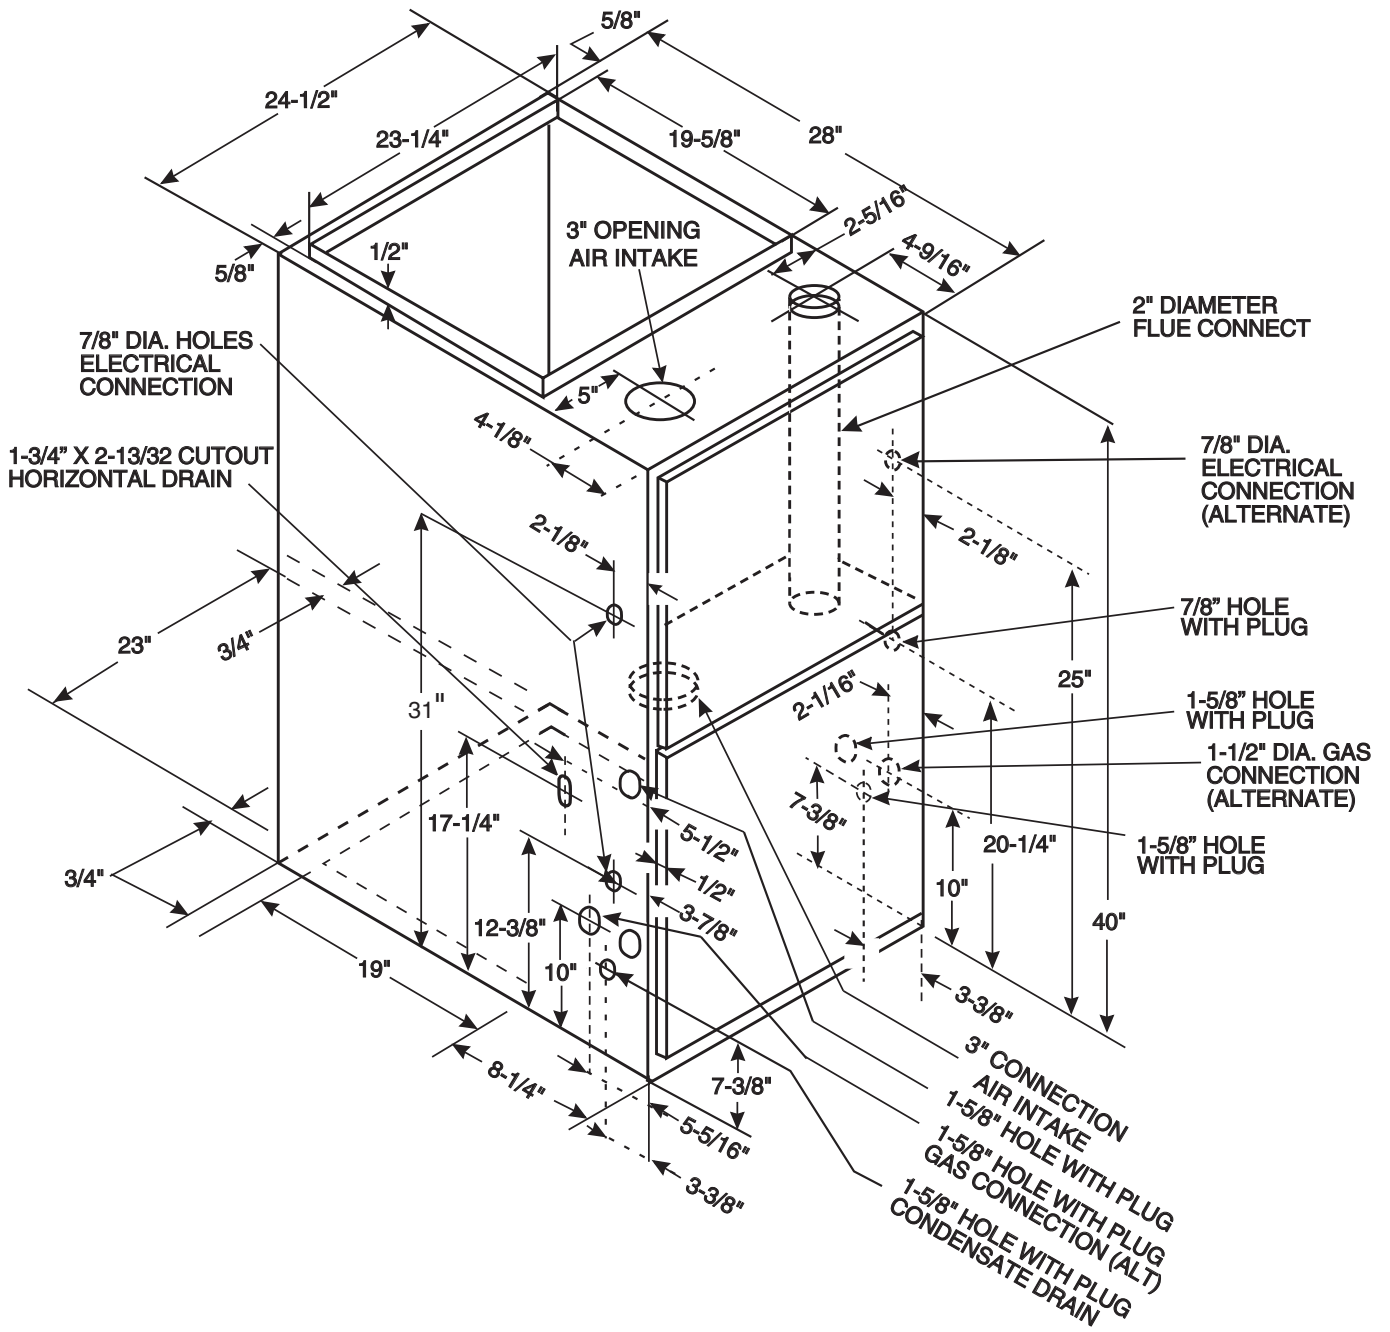

## TDHMD120 Airflow – Heating

| *DHMD120BCV5VB* Furnace Heating Airflow (CFM) and Power (Watts) vs. External Static Pressure With Filter |                 |                                |                          |      |      |      |      |      |     |
|--|-----------------|--------------------------------|--------------------------|------|------|------|------|------|-----|
|  | Airflow Setting | Target Airflow<br>(See Note 5) | External Static Pressure |      |      |      |      |      |     |
|  |                 |                                | 0.1                      | 0.3  | 0.5  | 0.7  | 0.9  |      |     |
| Heating  | 40% (low) Heat  | Low                            | 780                      | CFM  | 827  | 870  | 800  | 779  | 785 |
|  |                 |                                | Temp. Rise               | 57   | 55   | 59   | 61   | 60   |     |
|  |                 |                                | Watts                    | 76   | 98   | 142  | 175  | 212  |     |
|  |                 | Medium Low                     | 827                      | CFM  | 871  | 917  | 846  | 827  | 834 |
|  |                 |                                | Temp. Rise               | 55   | 52   | 56   | 57   | 57   |     |
|  |                 |                                | Watts                    | 85   | 108  | 153  | 188  | 226  |     |
|  |                 | Medium**                       | 870                      | CFM  | 911  | 959  | 889  | 872  | 878 |
|  |                 |                                | Temp. Rise               | 52   | 50   | 53   | 54   | 54   |     |
|  |                 |                                | Watts                    | 94   | 117  | 165  | 201  | 240  |     |
|  | High            | 959                            | CFM                      | 994  | 1047 | 977  | 964  | 969  |     |
|  |                 | Temp. Rise                     | 48                       | 45   | 49   | 49   | 49   |      |     |
|  |                 | Watts                          | 116                      | 140  | 191  | 230  | 272  |      |     |
| 65% (medium) Heat  | Low             | 1195                           | CFM                      | 1214 | 1282 | 1211 | 1209 | 1212 |     |
|  |                 | Temp. Rise                     | 57                       | 54   | 57   | 57   | 57   |      |     |
|  |                 | Watts                          | 193                      | 223  | 285  | 334  | 385  |      |     |
|  | Medium Low      | 1267                           | CFM                      | 1281 | 1353 | 1282 | 1283 | 1286 |     |
|  |                 | Temp. Rise                     | 54                       | 51   | 54   | 53   | 53   |      |     |
|  |                 | Watts                          | 224                      | 255  | 322  | 375  | 431  |      |     |
|  | Medium**        | 1469                           | CFM                      | 1470 | 1553 | 1482 | 1493 | 1493 |     |
|  |                 | Temp. Rise                     | 47                       | 44   | 46   | 46   | 46   |      |     |
|  |                 | Watts                          | 329                      | 366  | 449  | 517  | 592  |      |     |
|  | High            | 1685                           | CFM                      | 1671 | 1767 | 1696 | 1717 | 1715 |     |
|  |                 | Temp. Rise                     | 41                       | 39   | 40   | 40   | 40   |      |     |
|  |                 | Watts                          | 479                      | 519  | 633  | 722  | 831  |      |     |
| 100% (high) Heat   | Low             | 1660                           | CFM                      | 1648 | 1743 | 1671 | 1691 | 1690 |     |
|  |                 | Temp. Rise                     | 64                       | 61   | 63   | 62   | 62   |      |     |
|  |                 | Watts                          | 459                      | 499  | 609  | 695  | 799  |      |     |
|  | Medium Low      | 1760                           | CFM                      | 1741 | 1842 | 1770 | 1795 | 1792 |     |
|  |                 | Temp. Rise                     | 61                       | 57   | 60   | 59   | 59   |      |     |
|  |                 | Watts                          | 541                      | 582  | 709  | 808  | 932  |      |     |
|  | Medium**        | 1850                           | CFM                      | 1825 | 1931 | 1859 | 1888 | 1885 |     |
|  |                 | Temp. Rise                     | 58                       | 55   | 57   | 56   | 56   |      |     |
|  |                 | Watts                          | 624                      | 663  | 811  | 922  | 1068 |      |     |
|  | High            | 2040                           | CFM                      | 2002 | 1983 | 1977 | 1902 | 1853 |     |
|  |                 | Temp. Rise                     | 53                       | 53   | 53   | 55   | 57   |      |     |
|  |                 | Watts                          | 827                      | 925  | 925  | 925  | 925  |      |     |

**Notes:**

- \* First letter may be "A" or "T".
- ^ Letter may be "A" through "Z".
- \*\* Factory setting.
- Continuous Fan Setting: Heating or cooling airflow is approximately 50% of selected cooling value.
- LOW 350 cfm/ton is recommended for variable speed application for COMFORT & HUMID CLIMATE setting; NORMAL is 400 cfm/ton; HIGH 450 cfm/ton is for DRY CLIMATE setting.
- Target airflow is field selectable for high (100%) heat. Target airflow for low and medium heat are percentages of high heat and are not field selectable.

## TDHMD120 Airflow – Cooling

| *DHMD120BCV5VB* Furnace Cooling Airflow (CFM) & Power (Watts) vs. External Static Pressure w/Filter |                 |             |                          |      |      |      |      |      |
|---|-----------------|-------------|--------------------------|------|------|------|------|------|
| Unit Outdoor Size<br>(tons)   | Airflow Setting |             | External Static Pressure |      |      |      |      |      |
|   |                 |             | 0.1                      | 0.3  | 0.5  | 0.7  | 0.9  |      |
| 3.5   | 290 CFM/ton     | CFM         | 1046                     | 1103 | 1032 | 1027 | 1022 |      |
|   |                 | Watts       | 131                      | 157  | 210  | 251  | 295  |      |
|   | 310 CFM/ton     | CFM         | 1111                     | 1172 | 1102 | 1099 | 1095 |      |
|   |                 | Watts       | 153                      | 180  | 237  | 280  | 326  |      |
|   | 330 CFM/ton     | CFM         | 1177                     | 1242 | 1171 | 1171 | 1167 |      |
|   |                 | Watts       | 178                      | 207  | 266  | 313  | 363  |      |
|   | 350 CFM/ton     | CFM         | 1242                     | 1311 | 1240 | 1243 | 1240 |      |
|   |                 | Watts       | 205                      | 236  | 300  | 350  | 404  |      |
|   | 370 CFM/ton     | CFM         | 1307                     | 1381 | 1310 | 1315 | 1312 |      |
|   |                 | Watts       | 236                      | 269  | 337  | 392  | 450  |      |
|   | 400 CFM/ton     | CFM         | 1405                     | 1485 | 1414 | 1422 | 1421 |      |
|   |                 | Watts       | 289                      | 325  | 401  | 464  | 531  |      |
|   | 430 CFM/ton     | CFM         | 1503                     | 1589 | 1518 | 1530 | 1530 |      |
|   |                 | Watts       | 351                      | 389  | 476  | 547  | 627  |      |
|   | 450 CFM/ton     | CFM         | 1569                     | 1658 | 1587 | 1602 | 1603 |      |
|   |                 | Watts       | 397                      | 436  | 533  | 610  | 700  |      |
|   | 4               | 290 CFM/ton | CFM                      | 1181 | 1247 | 1176 | 1176 | 1172 |
|   |                 |             | Watts                    | 180  | 209  | 269  | 316  | 365  |
| 310 CFM/ton   |                 | CFM         | 1256                     | 1326 | 1255 | 1258 | 1255 |      |
|   |                 | Watts       | 212                      | 243  | 308  | 359  | 413  |      |
| 330 CFM/ton   |                 | CFM         | 1331                     | 1405 | 1335 | 1340 | 1338 |      |
|   |                 | Watts       | 248                      | 282  | 352  | 408  | 468  |      |
| 350 CFM/ton   |                 | CFM         | 1405                     | 1485 | 1414 | 1422 | 1421 |      |
|   |                 | Watts       | 289                      | 325  | 401  | 464  | 531  |      |
| 370 CFM/ton   |                 | CFM         | 1480                     | 1564 | 1493 | 1505 | 1504 |      |
|   |                 | Watts       | 336                      | 373  | 457  | 526  | 602  |      |
| 400 CFM/ton   |                 | CFM         | 1592                     | 1683 | 1612 | 1628 | 1629 |      |
|   |                 | Watts       | 415                      | 454  | 554  | 634  | 728  |      |
| 430 CFM/ton   |                 | CFM         | 1704                     | 1802 | 1731 | 1751 | 1753 |      |
|   |                 | Watts       | 507                      | 548  | 667  | 761  | 877  |      |
| 450 CFM/ton   |                 | CFM         | 1778                     | 1882 | 1810 | 1833 | 1836 |      |
|   |                 | Watts       | 577                      | 617  | 753  | 857  | 991  |      |
| 5   |                 | 290 CFM/ton | CFM                      | 1452 | 1534 | 1463 | 1474 | 1473 |
|   |                 |             | Watts                    | 318  | 354  | 436  | 502  | 574  |
|   | 310 CFM/ton     | CFM         | 1545                     | 1634 | 1562 | 1577 | 1577 |      |
|   |                 | Watts       | 380                      | 419  | 512  | 587  | 673  |      |
|   | 330 CFM/ton     | CFM         | 1639                     | 1733 | 1661 | 1679 | 1681 |      |
|   |                 | Watts       | 452                      | 492  | 599  | 685  | 787  |      |
|   | 350 CFM/ton     | CFM         | 1732                     | 1832 | 1760 | 1782 | 1784 |      |
|   |                 | Watts       | 533                      | 573  | 699  | 796  | 918  |      |
|   | 370 CFM/ton     | CFM         | 1825                     | 1931 | 1859 | 1885 | 1888 |      |
|   |                 | Watts       | 624                      | 663  | 811  | 922  | 925  |      |
|   | 400 CFM/ton     | CFM         | 1965                     | 2080 | 1977 | 1902 | 1853 |      |
|   |                 | Watts       | 781                      | 925  | 925  | 925  | 925  |      |
|   | 430 CFM/ton     | CFM         | 2064                     | 2229 | 1977 | 1902 | 1853 |      |
|   |                 | Watts       | 925                      | 925  | 925  | 925  | 925  |      |
|   | 450 CFM/ton     | CFM         | 2064                     | 2250 | 1977 | 1902 | 1853 |      |
|   |                 | Watts       | 925                      | 925  | 925  | 925  | 925  |      |

**NOTE:**

**CONTINUOUS fan mode during COOLING operation may not be appropriate in humid climates. If the indoor air exceeds 60% relative humidity or simply feels uncomfortably humid, it is recommended that the fan only be used in the AUTO mode.**

## Airflow Adjustment

Check inlet and outlet air temperatures to make sure they are within the range specified on the Furnace rating nameplate. If the airflow needs to be increased or decreased, see the Airflow Label on the Furnace or the unit's Service Facts for information on changing the speed of the Blower Motor for your specific model. Blower speed changes are made on the User Interface.

## INDOOR BLOWER TIMING

**Heating:** The Integrated Furnace Control module controls the Indoor Blower. The Blower start is fixed at 45 seconds after ignition. The FAN-OFF period is field selectable by the User Interface at 60, 100, 140, or 180 seconds. The factory setting is 100 seconds.

| MODEL                                  | TDHMD120BCV5VB<br>ADHMD120BCV5VB |
|--|----------------------------------|
| <b>TYPE</b>                            | Downflow/Horizontal Right        |
| <b>RATINGS</b> ②                       |                                  |
| 40% (low) heat Input BTUH              | 48,000                           |
| 40% (low) heat Capacity BTUH (ICS) ③   | 47,000                           |
| 100% (high) heat Input BTUH            | 120,000                          |
| 100% (high) heat Capacity BTUH (ICS) ③ | 114,000                          |
| Temp. rise (Min.-Max.) °F.             | 40 - 70                          |
| AFUE                                   | 95.0                             |
| <b>BLOWER DRIVE</b>                    | DIRECT                           |
| Diameter - Width (In.)                 | 10 x 10                          |
| No. Used                               | 1                                |
| Speeds (No.)                           | Variable                         |
| CFM vs. in. w.g.                       | See Fan Performance Table        |
| Motor HP                               | 1                                |
| R.P.M.                                 | Variable                         |
| Volts/Ph/Hz                            | 115/1/60                         |
| FLA                                    | 10.0                             |
| <b>COMBUSTION FAN - Type</b>           | Centrifugal                      |
| Drive - No. Speeds                     | Direct - Variable                |
| Motor HP - RPM                         | 1/50 - 5000                      |
| Volts/Ph/Hz                            | 33 - 110/3/60 - 180              |
| FLA                                    | 1.0                              |
| <b>FILTER — Furnished?</b>             | Yes                              |
| Type Recommended                       | High Velocity                    |
| Hi Vel. (No.-Size-Thk.)                | 2 - 16x20 - 1 in.                |
| <b>VENT — Size (in.)</b>               | 3 Round                          |
| <b>HEAT EXCHANGER</b>                  |                                  |
| Type -Fired                            | Aluminized Steel - Type I        |
| -Unfired                               |                                  |
| Gauge (Fired)                          | 20                               |
| <b>ORIFICES — Main</b>                 |                                  |
| Nat. Gas. Qty. — Drill Size            | 6 — 45                           |
| L.P. Gas Qty. — Drill Size ⑤           | 6 — 56                           |
| <b>GAS VALVE</b>                       | Redundant - Three Stage          |
| <b>PILOT SAFETY DEVICE</b>             |                                  |
| Type                                   | Hot Surface Igniter              |
| <b>BURNERS — Type</b>                  | Multipoint Inshot                |
| Number                                 | 6                                |
| <b>POWER CONN. — V/Ph/Hz</b> ④         | 115/1/60                         |
| Ampacity (In Amps)                     | 13.7                             |
| Max. Overcurrent Protection (Amps)     | 15                               |
| <b>PIPE CONN. SIZE (IN.)</b>           | 1/2                              |
| <b>DIMENSIONS</b>                      | H x W x D                        |
| Crated (In.)                           | 41-3/4 x 26-1/2 x 30-1/2         |
| <b>WEIGHT</b>                          |                                  |
| Shipping (Lbs.)/Net (Lbs)              | 206 / 196                        |

① Central Furnace heating designs are certified to ANSI Z21.47 / CSA 2.3.

② For U.S. applications, above input ratings (BTUH) are up to 2,000 feet, derate 4% per 1,000 feet for elevations above 2,000 feet above sea level.  
For Canadian applications, above input ratings (BTUH) are up to 4,500 feet, derate 4% per 1,000 feet for elevations above 4,500 feet above sea level.

③ Based on U.S. government standard tests.

④ The above wiring specifications are in accordance with National Electrical Code; however, installations must comply with local codes.

⑤ Furnace ships in natural gas configuration. The LP conversion kit used with the modulating furnace is BAYLPSS220B or BAYLPKT220B.

# Mechanical Specifications

---

## **MODULATING OPERATION**

The modulating gas valve provides longer heating cycles for more consistent heating comfort. Modulates from 40% to 100% in less than 1% increments of the furnace's heating capacity saving energy, while at the same time providing maximum homeowner comfort.

## **COMMUNICATING MODE**

Furnace is shipped ready to be connected in communicating mode using three wire hook-up using A/TCONT900 comfort control.

## **ALTERNATE 24V MODE**

Furnace is field configurable to 24V non-communicating mode.

## **COMFORT CONTROL**

Communicating furnace design, offers plug and play – walk away installation. Assures the entire heating and air conditioning system is set up in the proper modes to optimize the engineered performance of the matched system installed. The furnace can also be connected in 24V mode.

## **NATURAL GAS MODELS**

Central Heating furnace designs are certified by the American Gas Association for both natural and L.P. gas. Limit setting and rating data were established and approved under standard rating conditions using American National Standards Institute standards.

## **ENERGY EFFICIENT OPERATION**

Furnace is certified to leak 2% or less of nominal air conditioning CFM delivered when pressurized to .5" water column with all inlets, outlets, and drains sealed.

## **SAFE OPERATION**

The Integrated System Control has solid state devices, which continuously monitor for presence of flame, when the system is in the heating mode of operation. Dual solenoid combination gas valve and regulator provide additional safety.

## **QUICK HEATING**

Durable, cycle tested, heavy gauge aluminumized steel heat exchanger quickly transfers heat to provide warm conditioned air to the structure. Low energy power vent blower, to increase efficiency and provide a positive discharge of gas fumes to the outside.

## **BURNERS**

Multi-port In-shot burners will give years of quiet and efficient service. All models can be converted to L.P. gas without changing burners.

## **INTEGRATED SYSTEM CONTROL**

Exclusively designed operational program provides total control of furnace limit sensors, blowers, gas valve, flame control and includes self diagnostics for ease of service. Also contains connection points for EAC and Humidifier.

## **AIR DELIVERY**

The variable speed blower motor has sufficient airflow for most heating and cooling requirements and will switch from heating to cooling speeds on demand from room thermostat. The blower door safety switch will prevent or terminate furnace operation when the blower door is removed.

## **SECONDARY HEAT EXCHANGER**

The furnace has a special type 29-4C™ stainless steel secondary heat exchanger to reclaim heat from flue gases which would normally be lost.

## **STYLING**

Heavy gauge steel and "wrap-around" cabinet construction is used in the cabinet with baked-on enamel finish for strength and beauty. The heat exchanger section of the cabinet is completely lined with foil faced fiberglass insulation. This results in quiet and efficient operation due to the excellent acoustical and insulating qualities of fiberglass. Built-in bottom pan and alternate bottom, left or right side return air connection provision.

## **FEATURES AND GENERAL OPERATION**

The High Efficiency Gas Furnaces utilize an Adaptive Heat Up Silicon Nitride Hot Surface Ignition system, which eliminates the waste of a constant burning pilot. The integrated system control lights the main burners upon a demand for heat from the room thermostat. Complete front service access.

- a. Low energy power venter
- b. Vent proving pressure switch.

### About Trane and American Standard Heating and Air Conditioning

Trane and American Standard create comfortable, energy efficient indoor environments for residential applications. For more information, please visit [www.trane.com](http://www.trane.com) or [www.americanstandardair.com](http://www.americanstandardair.com)

---



The manufacturer has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.