

SECTION A



Table of Contents



HBL® Extra Heavy Duty Hospital Grade



Extra Heavy Duty SNAPConnect® Receptacles



Permanently Marked Receptacles



| Product | Page |
|---|------|
| Products at a Glance | A-2 |
| HBL® Extra Heavy Duty Devices | |
| Hospital Grade Receptacles | A-8 |
| Specification Grade Receptacles | A-9 |
| SNAPConnect® Extra Heavy Duty Devices | |
| Hospital Grade Receptacles | A-12 |
| Specification Grade Receptacles | A-14 |
| GFCI, USB and Surge Receptacles | A-16 |
| Permanently Marked Receptacles | A-18 |
| Switched Receptacles for Automatic Receptacle Control | |
| Wired and Wireless | A-20 |
| Codes and Standards | A-21 |
| Hubbell-PRO Heavy Duty Devices | |
| Hospital Grade Receptacles | A-22 |
| Specification Grade Receptacles | A-23 |
| Commercial Specification Grade Devices | |
| Permanently Marked Receptacles | A-19 |
| Duplex Receptacles | A-24 |
| Style Line® Decorator Receptacles | A-26 |

| Product | Page |
|---|------|
| USB Charger Receptacles and Outlets | |
| Features and Benefits | A-7 |
| Hospital and Commercial Grade Receptacles | A-27 |
| 4 Port and 2 Ports Outlets | A-27 |
| 4-PLEX® Receptacles and Accessories | A-28 |
| 15 & 20A Plugs and Connectors | |
| Hospital Grade 125V & 250V Devices | A-32 |
| Standard 125V Devices | A-33 |
| Standard 250V Devices | A-36 |
| 16A, 250V AC International | A-39 |
| Hazardous Location Receptacles, Plugs and Boxes | A-40 |
| Heavy Duty Insulgrip® Devices | |
| 30A Receptacles and Plugs | A-41 |
| 50A Receptacles and Plugs | A-43 |
| 60A Receptacles and Plugs | A-45 |
| Miscellaneous and Combination Receptacles | A-46 |
| Accessories | A-47 |
| Technical Information | A-51 |



Products at a Glance



HBL® Extra Heavy Duty Hospital Grade

- Deep nylon body design increases impact and chemical resistance
- One-piece nickel-plated brass ground strap
- ID marking surface for quick circuit identification
- Square head, 10-thread bronze center rivet
- External back wire clamp



HBL® Extra Heavy Duty

- One-piece brass ground strap
- Exclusive bypass contact design for greater contact force and reduced heat buildup
- Barbed assembly arms reduce possibility of face/base separation
- Deep face design



SNAPConnect® Extra Heavy Duty

- Hospital and Specification Grade
- SNAPConnect® modular wiring device system saves installation time
- Eliminates screw terminations
- Steel mounting strap, self-grounding
- Compact size requires minimal space
- Single receptacles available



Hubbell-PRO Heavy Duty

- Specification Grade and Hospital Grade
- Tamper-Resistant... **NOT** Plug Resistant™
- Power indicating LED feature optional
- Circuit ID marking area on Hospital Grade
- Steel mounting strap, self-grounding



USB Charger Receptacles

- Two Type-C, Type A&C and Type A port configurations, high power 5 Amp, 5 Volt DC USB output
- Heavy duty stainless steel USB ports; rated for 10,000 cord insertions and removals
- Patented Hubbell Tamper-Resistant technology uses cam action shutters; the friction-free design of the mechanism's doors requires much less force to open
- 4 Port and 2 Port outlet available



Commercial Specification Grade

- Installation ease
 - Single tab breakoff ears
 - Self-grounding staple
 - Easy access split circuit tab
- Tamper-Resistant... **NOT** Plug Resistant™
- Wrap-around galvanized steel straps



4-PLEX Receptacles

- Hospital Grade and Surge styles
- Mounts directly to 4-inch square box
- "A" and "B" circuit ID molded into face
- Removable knockouts for mounting to octagon concrete ring or box
- Heavy duty, triple wipe, brass power and ground contacts



Features and Benefits

Hubbell "Hospital Grade" Devices

UL requirements for Hospital Grade devices is more stringent than those for standard devices. Hubbell receptacles are designed to meet and exceed the standards.

- Exclusive nickel-plated bypass contact design increases contact pressure, lowering the operating temperature
- Four point grounding system provides redundant grounding for low resistance ground continuity in high abuse areas
- Impact resistant deep face design prevents breakage

Because of these features and others, the benefit is performance, reliability and value for any health care facility.



HBL8200GY



Housing Design

- Reinforced thermoplastic base provides superior thermal, electrical and mechanical properties
- Providing contact stability, this high performance material will reduce heat buildup giving you long lasting performance
- Deep body design increases impact and chemical resistance




Terminals

- External wiring clamps allow for visual inspection of the terminals
- Unique strand containment feature on the terminal "bundles" the wire, ensuring 100% clamping of wire strands and reducing heat from the termination



One-Piece Mounting Strap

- Back wired ground terminal allows faster, easier installation
- One-piece nickel-plated brass integral ground strap for greater corrosion resistance
- Patented ground contact provides redundant grounding



Contacts

- Exclusive bypass contacts are made of nickel-plated brass alloy, increasing blade retention, insuring reliable uninterrupted flow of power
- Barbed assembly arms reduce possibility of face/base separation



Identification

- I.D. marking surface provides quick, sure circuit identification
- All Hospital Grade devices are marked with the green dot symbol, required by UL



Center Rivet

- Square head, 10-thread bronze center rivet won't rotate, reduces stripping and resists corrosion



Features and Benefits

HBL® Extra Heavy Duty Industrial Series

Hubbell's commitment to quality continually reinforces a philosophy of unrivaled performance. No Hubbell device exemplifies this philosophy more than the HBL5262. While all Hubbell receptacles are designed and manufactured to withstand even the harshest environments, none match the total performance of the HBL5262.

Whether in a factory, office building or school, the Hubbell HBL5262 is the receptacle of choice when people are depending on the safety and reliability of a receptacle.

- One-piece nickel-plated brass ground strap
- Patented bypass contacts
- Back wired ground terminal reduces installation time and increases convenience

The safest, most reliable design for a low resistance flow of fault currents. Oversized "bell" shaped ground contacts, along with nickel plated steel retaining shields, help minimize damage to the grounding system during abrupt pullout.



HBL5262




Housing Design

- RTP base offers greater heat resistance, plus contact stability
- Providing contact stability, this high tech material will reduce heat buildup, giving you long lasting performance
- Deep nylon body design delivers increased impact resistance



Terminals

- External bundling terminals contain wire strands and are designed for quick inspection
- Unique strand containment feature on the terminal "bundles" the wire, ensuring 100% clamping of wire strands and reducing heat from the termination



One-Piece Mounting Strap

- Back wired ground terminal allows faster, easier installation
- One-piece nickel-plated brass ground strap for low resistance of fault currents
- Patented ground contact provides redundant grounding



Contacts

- Patented "bypass" contacts are made of high grade brass alloy, increasing blade retention, insuring reliable uninterrupted flow of power
- Barbed brass locking arms keep the face locked in place to diminish potential for face/base separation



Identification

- I.D. marking surface provides quick, sure circuit identification



Center Rivet


- Square head, 10-thread brass center rivet won't rotate, reduces stripping and resists corrosion



Features and Benefits

SNAPConnect® Extra Heavy Duty Receptacles

- Modular wiring system eliminates screw terminals
- Speeds installation and trim-out
- Clear polycarbonate terminal housing to inspect contacts
- Available in standard, tamper-resistant and power indicating LED versions
- Abuse resistant nylon for extra heavy use applications
- Stainless steel autoground

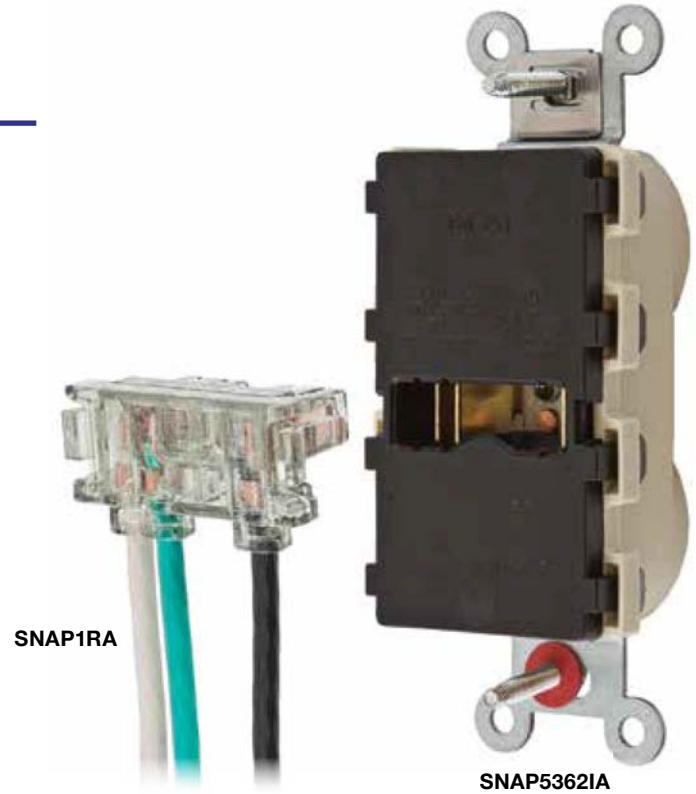

Housing Design

- Reinforced thermoplastic base provides superior thermal, electrical and mechanical properties
- Compact size, requires minimal box space
- Clean finished look

Labor Savings



Save One Minute!

- Rough-in the SNAPConnect® terminal instead of pigtails



Installation Ease

- Self-grounding clip
- Modular receptacle which requires pigtailed connector below



Save Over Three Minutes!

- Remove protective packaging and SNAPConnect® device to the circuit



Identification

- Clear terminal housing for easy inspection of power contacts
- No exposed metal
- Audible SNAP, indicates solid connection
- Secure, easy grip latch



Complete Trim-Out in Less Than One Minute!

- Secure mounting screws, attach wallplate, job complete



Features and Benefits

Commercial Specification Grade Receptacles

The Hubbell Tamper-Resistant Mechanism eliminates the frustration and difficulty experienced using TR receptacles with plugs that have sharp, or bent blades. Hubbell TR receptacles work so well there is virtually no perceptible difference in the feel between the TR receptacles and our conventional non-TR receptacles. Trust Hubbell to deliver TamperResistant protection that feels like it's not even there.

- Patented TR design eliminates plug-in difficulty and TR complaints
- Perfect for residential TR applications involving tenants with limited dexterity or hand strength
- For use in locations requiring TamperResistant receptacles
- Best-in-class TR mechanism



BR15I



DR20GRYTR

Tamper-Resistant... NOT Plug Resistant™



Housing Design

- Durable nylon face and base construction
- Modern architectural appearance, Style Line® decorator face



Tamper-Resistant... NOT Plug Resistant®

- Patented Cam Action TR Mechanism
- Difficulties due to problematic plugs are minimized



One-Piece Mounting Strap

- Sturdy construction, wrap-around galvanized steel straps
- Installation ease
- Single tab breakoff ears
- Self-grounding staple



Contacts

- Easy access split circuit tab
- Fork terminal capable
- Oversized terminal screws



Permanently Marked Receptacles for Automatic Outlet Control Systems

- These receptacles are embossed with the universally recognized power symbol and the word "CONTROLLED" remains clearly visible after installation
- Available in SNAPConnect® and conventionally wired versions



Nightlight Receptacle

- Two nightlight LEDs for 0.5 Lumens total
- Tamper-resistant shutters complies with NEC article 406.12
- Back and side wired



Features and Benefits

USB Charger Receptacles and Outlets

More Ways to Charge Faster with Hubbell's line of USB Chargers, available in Type-C, Combination Type A&C or the legacy Type A, all with a USB high power output of 5 Amp 5 Volt DC. Hubbell's USB Charger Duplex Receptacle provides both USB and electrical power in a standard single gang opening. Designed to provide maximum charging for portable electronics, the USB ports are capable of charging two tablets simultaneously.

The 4 Port and 2 Port Charger Outlet feature a USB port door, which when open enables power. When closed, all power is switched OFF. This eliminates all current flow for a "zero" no-load draw. Buildings looking to provide 100% green efficiency in power delivery will maximize LEED and energy efficient design.

Common Features

- Green LED indicator to show USB power available
- USB stainless steel ports rated for minimum 10,000 insertions and removals
- Complies with battery charging specification BC1.2
- Designed for commercial, industrial and home use
- Compatible with USB 1.1/2.0/3.0 devices, including Apple® products



USB15AC5W



USB4W



Types of USB Chargers

- Two Type-C port configurations
- One Type A and one Type-C port configurations
- Two Type A port configurations
- High power 5 Amp, 5 Volt DC USB output



SNAPConnect® Receptacle

- SNAPConnect® devices reduce labor time during installation and when being serviced in the future
- Installation ease
- Self-grounding staple



USB Charger Receptacle

- Standard and Hospital Grade
- Provides both USB and electrical power in a standard single gang opening
- Back and side wired



4 Port and 2 Port Outlets

- 4 Port - 5 Amp, 5V DC, Type A, class 2.0
- 2 Port - 3 Amp, 5V DC, Type A, class 2.0
- Switch activated port door; when open enables power. When closed, all power is switched off, for a "zero" no-load draw
- Shallow depth design for 2 port



Identification

- Patented Hubbell Tamper-Resistant technology uses cam action shutters; the friction-free design of the mechanism's doors requires much less force to open
- Green LED indicator to show USB power available




Switch Combo Outlets


- Two USB ports 2.1 Amp, 5 Volt DC, type A, class 2.0
- Isolated 15 Amp, 120V AC single pole/3-way switch

Apple® is a registered trademark of Apple Inc.


15 and 20 Ampere, 125 Volts




HBL8200GY




HBL8300SGA



HBL8200ILW



HBL2172



HBL8210GY

Dimensions in Inches (mm)

IP20
SUITABILITY



15A 125V
NEMA 5-15R
UL CSA
0.5 HP



20A 125V
NEMA 5-20R
UL CSA
1 HP

HBL® Extra Heavy Duty Hospital Grade ● Receptacles

Duplex

Flush, thermoplastic polyester face, back and side wired.

| Color | Catalog Number | |
|--------------|-------------------|-------------------|
| Black | HBL8200BK | - |
| Blue | - | HBL8300BL |
| Brown | HBL8200 | HBL8300 |
| Gray | HBL8200GY | HBL8300GY |
| Ivory | HBL8200I | HBL8300I |
| Light Almond | HBL8200LA | HBL8300LA |
| Red | HBL8200RED | HBL8300RED |
| White | HBL8200W | HBL8300W |

Flush, LED illuminated face, back and side wired.

| | | |
|-------|--------------------|--------------------|
| Gray | HBL8200ILGY | HBL8300ILGY |
| Ivory | HBL8200ILI | HBL8300ILI |
| Red | HBL8200ILR | HBL8300ILR |
| White | HBL8200ILW | HBL8300ILW |



Tamper-Resistant receptacle with wire leads. Complies with requirements of NEC® article 517-18(c).

| | | |
|--------------|---------------------|---------------------|
| Brown | HBL8200SGA | HBL8300SGA |
| Gray | HBL8200SGGYA | HBL8300SGGYA |
| Ivory | HBL8200SGIA | HBL8300SGIA |
| Light Almond | - | HBL8300SGLA |
| Red | HBL8200SGRA | HBL8300SGRA |
| White | HBL8200SGWA | HBL8300SGWA |

Isolated ground^A.

| | | |
|--------|----------------|----------------|
| Orange | IG8200 | IG8300 |
| Red | IG8200R | IG8300R |

MRI Receptacle, Duplex

MRI receptacle, flush, thermoplastic polyester face, back and side wired. 100% non-ferrous.

| | | |
|--------------|---------------------|---------------------|
| Ivory | HBL8200IMRI | HBL8300IMRI |
| Light Almond | HBL8200LAMRI | HBL8300LAMRI |
| Red | HBL8200RMRI | HBL8300RMRI |
| White | HBL8200WMRI | HBL8300WMRI |

Slender/Compact, Duplex

Flush, thermoplastic polyester face, back, and side wired, Fed. Spec. verified.

| | | |
|--------------|--------------------|--------------------|
| Brown | HBL8200H | HBL8300H |
| Gray | HBL8200HG | HBL8300HG |
| Green | - | HBL8300HGN |
| Ivory | HBL8200HI | HBL8300HI |
| Light Almond | HBL8200HLA | HBL8300HLA |
| Red | HBL8200HRED | HBL8300HRED |
| White | HBL8200HW | HBL8300HW |

Style Line® Decorator*

Flush, nylon face, back and side wired.

| | | |
|--------------|------------------|------------------|
| Brown | HBL2172 | HBL2182 |
| Gray | HBL2172GY | HBL2182GY |
| Ivory | HBL2172I | HBL2182I |
| Office White | - | HBL2182OW |
| Red | HBL2172R | HBL2182R |
| White | HBL2172WA | HBL2182WA |

Isolated ground^A.

| | | |
|--------|---|-----------------|
| Ivory | - | IG2182I |
| Orange | - | IG2182 |
| White | - | IG2182WA |

Single

Flush, nylon face, back and side wired, Fed. Spec. verified.

| | | |
|--------|------------------|------------------|
| Almond | - | HBL8310AL |
| Brown | HBL8210 | HBL8310 |
| Gray | HBL8210GY | HBL8310GY |
| Ivory | HBL8210I | HBL8310I |
| Red | HBL8210R | HBL8310R |
| White | HBL8210W | HBL8310W |

Panel mount on 1.94 in. (49.2) centers.

| | | |
|-------|-----------------|-----------------|
| Brown | HBL8284 | - |
| Ivory | HBL8284I | HBL8384I |

Isolated ground^A.

| | | |
|--------|---------------|---------------|
| Orange | IG8210 | IG8310 |
|--------|---------------|---------------|

Note: ^ASee section N for additional information on isolated ground devices.

*Not Fed. Spec. Listed.

See pages A-47 and A-48 for accessories.

See page Tech-10 for Tamper-Resistant description.

See section M for additional information on Hospital Grade products.

See section O for wallplates.

NEC® is a registered trademark of the National Fire Protection Association (NFPA).

Straight Blade Devices



15 and 20 Ampere, 125 and 250 Volts

HBL® Extra Heavy Duty Hospital Grade Receptacles




15A 250V
NEMA 6-15R
UL CSA
1.5 HP



20A 250V
NEMA 6-20R
UL CSA
2 HP

| Duplex | Color | Catalog Number | |
|---|-------|-----------------|-----------------|
| Flush, thermoplastic polyester face, back and side wired. | Brown | HBL8600 | HBL8400 |
| | Ivory | HBL8600I | HBL8400I |

Note: See page A-48 for accessories.
See section N for wallplates.



HBL8600I

HBL® Extra Heavy Duty, Specification Grade Receptacles




15A 125V
NEMA 5-15R
UL CSA
0.5 HP




20A 125V
NEMA 5-20R
UL CSA
1 HP


| Duplex | Color | Catalog Number | | |
|--|--------------------------------|--------------------|--------------------|-----------------|
| Flush, nylon face, back and side wired. | Black | HBL5262BK | HBL5362BK | |
| | Blue | - | HBL5362BL | |
| | Brown | HBL5262 | HBL5362 | |
| | Gray | HBL5262GY | HBL5362GY | |
| | Ivory | HBL5262I | HBL5362I | |
| | Red | HBL5262R | HBL5362R | |
| | White | HBL5262W | HBL5362W | |
| | Isolated ground ^A . | Gray | IG5262GY | IG5362GY |
| | | Ivory | IG5262I | IG5362I |
| | | Orange | IG5262 | IG5362 |
| Red | | IG5262R | IG5362R | |
| White | | - | IG5362W | |
| Non-isolated ground, bulk pack of 100. | Orange | - | HBL5362M4 | |
| Weather Resistant, flush, nylon face, back and side wired. | Black | HBL5262BKWR | HBL5362BKWR | |
| | Brown | HBL5262WR | HBL5362WR | |
| | Gray | HBL5262GYWR | HBL5362GYWR | |
| | Ivory | HBL5262IWR | HBL5362IWR | |
| | Red | HBL5262RWR | HBL5362RWR | |
| | White | HBL5262WWR | HBL5362WWR | |
| Corrosion resistant. | Ivory | HBL52CM62I | - | |
| | Yellow | HBL52CM62 | HBL53CM62 | |
| Weather Resistant, Isolated ground ^A . | Gray | IG5262GYWR | IG5362GYWR | |
| | Ivory | IG5262IWR | IG5362IWR | |
| | Orange | IG5262WR | IG5362WR | |
| | Red | IG5262RWR | IG5362RWR | |
| | White | - | IG5362WWR | |
| On 4 in. (101.6) round cover. | Brown | HBL5282 | - | |




HBL5262

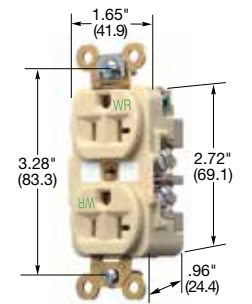

HBL5362IWR



HBL5261



HBL5284

Single

| | | | |
|--|--------|-------------------|---------------------|
| Flush, nylon face, back and side wired. | Black | HBL5261BK | HBL5361BK |
| | Brown | HBL5261 | HBL5361 |
| | Gray | - | HBL5361GRY |
| | Ivory | HBL5261I | HBL5361I |
| | White | - | HBL5361W |
| Isolated ground ^A . | Orange | IG5261 | IG5361 |
| Weather Resistant, Isolated ground ^A . | Orange | IG5261WR | IG5361WR |
| Ring terminal connection. | Brown | HBL5261RT | HBL5361RT |
| | White | HBL5261WRT | - |
| | Yellow | HBL5261YRT | - |
| Weather Resistant, flush, nylon face, back and side wired. | Brown | HBL5261WR | HBL5361WR |
| | Gray | - | HBL5361GRYWR |
| Corrosion resistant. | Ivory | HBL5261IWR | HBL5361IWR |
| | Yellow | HBL52CM61 | HBL53CM61 |
| Panel mount on 1.94 in. (49.3) centers. | Brown | HBL5284 | HBL5357 |

Note: ^ASee section N for additional information on isolated ground devices.
See pages A-47 and A-48 for accessories.
See page Tech-10 for Weather Resistant descriptions.
See section O for wallplates.

Dimensions in Inches (mm)


15 and 20 Ampere, 125 Volts




15A 125V
NEMA 5-15R
UL CSA
0.5 HP




20A 125V
NEMA 5-20R
UL CSA
1 HP




HBL53621TR

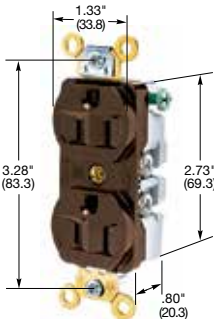


HBL5252



HBL5242

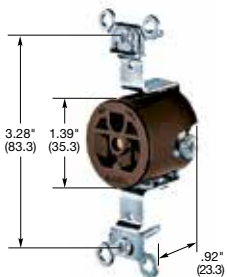

HBL5251

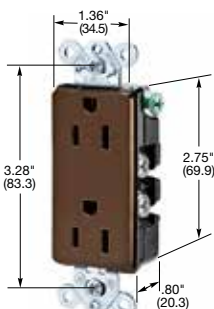

HBL2152

Dimensions in Inches (mm)

HBL® Extra Heavy Duty Tamper-Resistant Receptacles

Duplex

| Description | Color | Catalog Number | |
|---|--------------|--------------------|--------------------|
| Flush, nylon face, back and side wired. | Black | HBL5262BKTR | HBL5362BKTR |
| | Blue | HBL5262BLTR | HBL5362BLTR |
| | Brown | HBL5262TR | HBL5362TR |
| | Gray | HBL5262GYTR | HBL5362GYTR |
| | Ivory | HBL5262ITR | HBL5362ITR |
| | Light Almond | HBL5262LATR | HBL5362LATR |
| | Red | HBL5262RTR | HBL5362RTR |
| | White | HBL5262WTR | HBL5362WTR |

HBL® Extra Heavy Duty Compact Receptacles

Duplex

| Description | Color | Catalog Number | |
|---|-------|------------------|------------------|
| Flush, nylon face, back and side wired. | Black | HBL5252BK | HBL5352BK |
| | Blue | - | HBL5352BL |
| | Brown | HBL5252 | HBL5352 |
| | Gray | HBL5252GY | HBL5352GY |
| | Ivory | HBL5252I | HBL5352I |
| | Red | HBL5252R | HBL5352R |
| | White | HBL5252W | HBL5352W |
| On a 4 in. (101.6) round cover. | Brown | HBL5253 | - |
| Flush, nylon face, side wired only. | Brown | HBL5242 | HBL5342 |
| | Gray | HBL5242GY | HBL5342GY |
| | Ivory | HBL5242I | HBL5342I |
| | White | HBL5242W | HBL5342W |
| Ring terminal connection. | Brown | HBL5242RT | HBL5342RT |

Single

| Description | Color | Catalog Number | |
|--------------------------------------|-------|-----------------|----------------|
| Flush, side wired only. | Brown | HBL5251 | - |
| | Ivory | HBL5251I | - |
| Panel mount 1.75 in. (44.5) centers. | Brown | HBL5258 | HBL5358 |
| | Ivory | HBL5258I | - |

Style Line® Decorator*

| Description | Color | Catalog Number | |
|---|--------------|------------------|------------------|
| Flush, nylon face, back and side wired. | Almond | HBL2152AL | HBL2162AL |
| | Black | HBL2152BK | HBL2162BK |
| | Brown | HBL2152 | HBL2162 |
| | Gray | HBL2152GY | HBL2162GY |
| | Ivory | HBL2152I | HBL2162I |
| | Office White | HBL2152OW | HBL2162OW |
| | White | HBL2152WA | HBL2162WA |
| Isolated ground ^A . | Gray | - | IG2162GY |
| | Orange | IG2152 | IG2162 |

Note: ^ASee section N for additional information on isolated ground devices.

*Style Line Duplex devices are not Fed. Spec. Listed.

See page A-47 for accessories.

See section O for wallplates.

Straight Blade Devices



15 and 20 Ampere, 250 Volts

HBL® Extra Heavy Duty, Specification Grade Receptacles



15A 250V
NEMA 6-15R
UL CSA
1.5 HP



20A 250V
NEMA 6-20R
UL CSA
2 HP

Duplex

| Description | Color | Catalog Number | |
|--|--------|-----------------|------------------|
| Flush, nylon face, back and side wired, multiple drive screws. | Black | - | HBL5462BK |
| | Brown | HBL5662 | HBL5462 |
| | Gray | - | HBL5462GY |
| | Ivory | HBL5662I | HBL5462I |
| | Red | - | HBL5462R |
| Isolated ground ^A . | Orange | IG5662 | IG5462 |





Single

| Description | Color | Catalog Number | |
|---|--------|------------------|------------------|
| Flush, nylon face, back and side wired. | Brown | HBL5661 | HBL5461 |
| | Gray | - | HBL5461GY |
| | Ivory | HBL5661I | HBL5461I |
| | Red | - | HBL5461R |
| | White | - | HBL5461W |
| Isolated ground ^A . | Orange | IG5661 | IG5461 |
| Panel mount 1.94 in. (49.3) centers. | Brown | HBL5684 | - |
| Ring terminal connection. | Brown | HBL5661RT | - |

Duplex and Single Panel Mount


| Description | Color | Catalog Number | |
|--|-------|-----------------|---|
| Flush, nylon duplex face, side wired only. | Brown | HBL5652 | - |
| | Ivory | HBL5652I | - |
| Panel mount 1.75 in. (44.5) centers. | Brown | HBL5658 | - |

Note: ^ASee section N for additional information on isolated ground devices.
HP ratings are AC only.
See page A-47 for accessories.

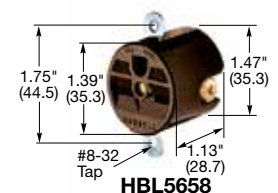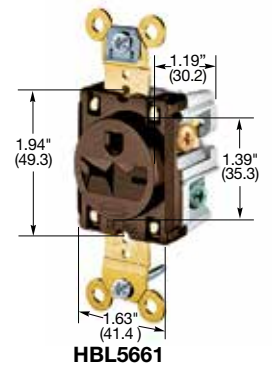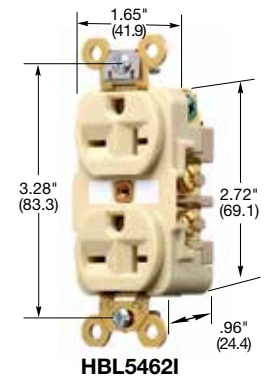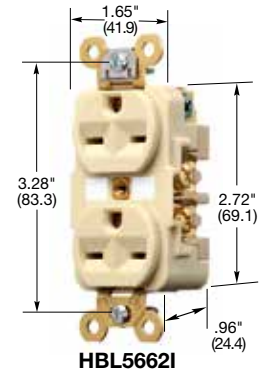


Dimensions in Inches (mm)


15 and 20 Ampere, 125 Volts

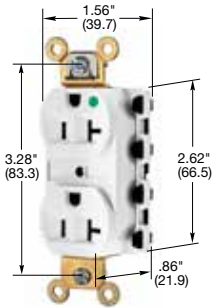


SNAP8300WA




SNAP8300LATRA

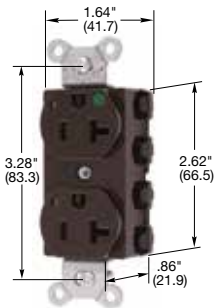

SNAP8300L

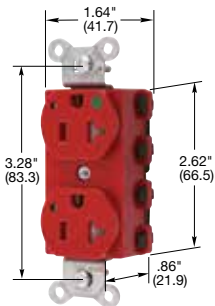

SNAP8300RLTRA



SNAP8310GY

Dimensions in Inches (mm)

IP20
SUITABILITY



15A 125V
NEMA 5-15R
UL CSA
0.5 HP



20A 125V
NEMA 5-20R
UL CSA
1 HP

SNAPConnect® Extra Heavy Duty Hospital Grade ● Receptacles

Duplex

| Description | Color | Catalog Number | Catalog Number | |
|---|---|------------------------|------------------------|-----------------------|
| Hospital grade, finder groove, nylon face, modular receptacle which requires pigtailed connector on page A-15. | Black | SNAP8200BKA | SNAP8300BKA | |
| | Brown | SNAP8200A | SNAP8300A | |
| | Gray | SNAP8200GYA | SNAP8300GYA | |
| | Ivory | SNAP8200IA | SNAP8300IA | |
| | Light Almond | SNAP8200LAA | SNAP8300LAA | |
| | Red | SNAP8200RA | SNAP8300RA | |
| Hospital grade, smooth nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP8200BKNA | SNAP8300BKNA | |
| | Brown | SNAP8200NA | SNAP8300NA | |
| | Gray | SNAP8200GYNA | SNAP8300GYNA | |
| | Ivory | SNAP8200INA | SNAP8300INA | |
| | Light Almond | SNAP8200LANA | SNAP8300LANA | |
| | Red | SNAP8200RNA | SNAP8300RNA | |
| Hospital grade, Tamper-Resistant, smooth nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP8200BKTRA | SNAP8300BKTRA | |
| | Brown | SNAP8200TRA | SNAP8300TRA | |
| | Gray | SNAP8200GYTRA | SNAP8300GYTRA | |
| | Ivory | SNAP8200ITRA | SNAP8300ITRA | |
| | Light Almond | SNAP8200LATRA | SNAP8300LATRA | |
| | Red | SNAP8200RTRA | SNAP8300RTRA | |
| Hospital grade, Tamper-Resistant, Split Circuit, smooth nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP8200BKSCTRA | SNAP8300BKSCTRA | |
| | Brown | SNAP8200SCTRA | SNAP8300SCTRA | |
| | Gray | SNAP8200GYSCTRA | SNAP8300GYSCTRA | |
| | Ivory | SNAP8200ISCTRA | SNAP8300ISCTRA | |
| | Light Almond | SNAP8200LASCTRA | SNAP8300LASCTRA | |
| | Red | SNAP8200RSCTRA | SNAP8300RSCTRA | |
| Isolated ground ⁴ , Hospital grade, Tamper-Resistant. | Orange | SNAP8200IGTRA | SNAP8300IGTRA | |
| | Red | SNAP8200RIGTRA | SNAP8300RIGTRA | |
| | Hospital grade, with Power Indicating LED, smooth nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP8200BKL | SNAP8300BKL |
| | | Brown | SNAP8200L | SNAP8300L |
| | | Gray | SNAP8200GYL | SNAP8300GYL |
| | | Ivory | SNAP8200IL | SNAP8300IL |
| Light Almond | | SNAP8200LAL | SNAP8300LAL | |
| Red | | SNAP8200RL | SNAP8300RL | |
| Isolated ground ⁴ , Hospital grade, with Power Indicating LED. | Orange | SNAP8200IGL | SNAP8300IGL | |
| | Red | SNAP8200RIGL | SNAP8300RIGL | |
| | Hospital grade, Tamper-Resistant, with Power Indicating LED, smooth nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP8200BKLTRA | SNAP8300BKLTRA |
| | | Brown | SNAP8200LTRA | SNAP8300LTRA |
| | | Gray | SNAP8200GYLTRA | SNAP8300GYLTRA |
| | | Ivory | SNAP8200ILTRA | SNAP8300ILTRA |
| Light Almond | | SNAP8200LALTRA | SNAP8300LALTRA | |
| Red | | SNAP8200RLTRA | SNAP8300RLTRA | |
| Isolated ground ⁴ , Hospital grade, TR with Power Indicating LED. | Orange | SNAP8200IGLTRA | SNAP8300IGLTRA | |
| | Red | SNAP8200RIGLTRA | SNAP8300RIGLTRA | |

SNAPConnect® Extra Heavy Duty Hospital Grade ● Single Receptacles



| Color | Hospital Grade ● | | Hospital Grade ● Tamper-Resistant | |
|--------------|-------------------|-------------------|-----------------------------------|---------------------|
| | 15A 125V | 20A 125V | 15A 125V | 20A 125V |
| Almond | SNAP8210AL | SNAP8310AL | SNAP8210ALTR | SNAP8310ALTR |
| Black | SNAP8210BK | SNAP8310BK | SNAP8210BKTR | SNAP8310BKTR |
| Blue | SNAP8210BL | SNAP8310BL | SNAP8210BLTR | SNAP8310BLTR |
| Brown | SNAP8210 | SNAP8310 | SNAP8210TR | SNAP8310TR |
| Gray | SNAP8210GY | SNAP8310GY | SNAP8210GYTR | SNAP8310GYTR |
| Ivory | SNAP8210I | SNAP8310I | SNAP8210ITR | SNAP8310ITR |
| Light Almond | SNAP8210LA | SNAP8310LA | SNAP8210LATR | SNAP8310LATR |
| Red | SNAP8210R | SNAP8310R | SNAP8210RTR | SNAP8310RTR |
| White | SNAP8210W | SNAP8310W | SNAP8210WTR | SNAP8310WTR |

Straight Blade Devices



15 and 20 Ampere, 125 Volts





IP20
SUITABILITY



SNAPConnect® Extra Heavy Duty Hospital Grade Receptacles

Style Line® Decorator

| Description | Color | Catalog Number | Catalog Number |
|--|--------------|------------------------|------------------------|
| Hospital grade, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector on page A-15. | Black | SNAP2172BKA | SNAP2182BKA |
| | Brown | SNAP2172A | SNAP2182A |
| | Gray | SNAP2172GYA | SNAP2182GYA |
| | Ivory | SNAP2172IA | SNAP2182IA |
| | Light Almond | SNAP2172LAA | SNAP2182LAA |
| | Red | SNAP2172RA | SNAP2182RA |
| Hospital grade, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | White | SNAP2172WA | SNAP2182WA |
| | Black | SNAP2172BKNA | SNAP2182BKNA |
| | Brown | SNAP2172NA | SNAP2182NA |
| | Gray | SNAP2172GYNA | SNAP2182GYNA |
| | Ivory | SNAP2172INA | SNAP2182INA |
| | Light Almond | SNAP2172LANA | SNAP2182LANA |
| Hospital grade, Tamper-Resistant, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Red | SNAP2172RNA | SNAP2182RNA |
| | White | SNAP2172WNA | SNAP2182WNA |
| | Black | SNAP2172BKTRA | SNAP2182BKTRA |
| | Brown | SNAP2172TRA | SNAP2182TRA |
| | Gray | SNAP2172GYTRA | SNAP2182GYTRA |
| | Ivory | SNAP2172ITRA | SNAP2182ITRA |
| Hospital grade, Tamper-Resistant, Split Circuit, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Light Almond | SNAP2172LATRA | SNAP2182LATRA |
| | Red | SNAP2172RTRA | SNAP2182RTRA |
| | White | SNAP2172WTRA | SNAP2182WTRA |
| | Black | SNAP2172BKSCTRA | SNAP2182BKSCTRA |
| | Brown | SNAP2172SCTRA | SNAP2182SCTRA |
| | Gray | SNAP2172GYSCTRA | SNAP2182GYSCTRA |
| Hospital grade, with Power Indicating LED, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Ivory | SNAP2172ISCTRA | SNAP2182ISCTRA |
| | Light Almond | SNAP2172LASCTRA | SNAP2182LASCTRA |
| | Red | SNAP2172RSCTRA | SNAP2182RSCTRA |
| | White | SNAP2172WSCTRA | SNAP2182WSCTRA |
| | Orange | SNAP2172IGTRA | SNAP2182IGTRA |
| | Red | SNAP2172RIGTRA | SNAP2182RIGTRA |
| Hospital grade, with Power Indicating LED, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP2172BKL | SNAP2182BKL |
| | Brown | SNAP2172L | SNAP2182L |
| | Gray | SNAP2172GYL | SNAP2182GYL |
| | Ivory | SNAP2172IL | SNAP2182IL |
| | Light Almond | SNAP2172LAL | SNAP2182LAL |
| | Red | SNAP2172RL | SNAP2182RL |
| Hospital grade, with Power Indicating LED, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | White | SNAP2172WL | SNAP2182WL |
| | Orange | SNAP2172IGL | SNAP2182IGL |
| | Red | SNAP2172RIGL | SNAP2182RIGL |
| | Black | SNAP2172BKLTRA | SNAP2182BKLTRA |
| | Brown | SNAP2172LTRA | SNAP2182LTRA |
| | Gray | SNAP2172GYLTRA | SNAP2182GYLTRA |
| Hospital grade, Tamper-Resistant, with Power Indicating LED, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Ivory | SNAP2172ILTRA | SNAP2182ILTRA |
| | Light Almond | SNAP2172LALTRA | SNAP2182LALTRA |
| | Red | SNAP2172RLTRA | SNAP2182RLTRA |
| | White | SNAP2172WLTRA | SNAP2182WLTRA |
| | Orange | SNAP2172IGLTRA | SNAP2182IGLTRA |
| | Red | SNAP2172RIGLTRA | SNAP2182RIGLTRA |

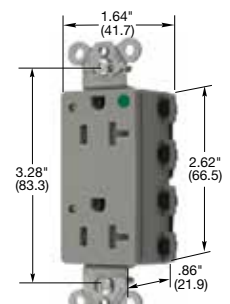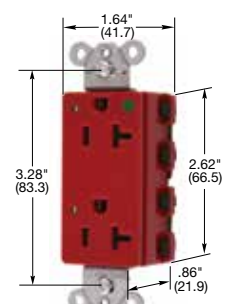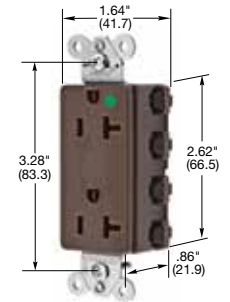


Dimensions in Inches (mm)

Note: ^ASee section N additional information on isolated ground devices and section O for wallplates.
 See page A-5 for additional information on SNAPConnect features and page A-16 for SNAPConnect pigtailed connectors.
 See page Tech-10 for Tamper-Resistant and LED Power Indicators descriptions.
 See pages A-47 and A-48 for accessories.


SNAPConnect® Tester

| Description | Catalog Number |
|--|----------------|
| Circuit Tester for SNAPConnect receptacle terminals, GFCI and standard receptacles | SNAPCTG |


15 and 20 Ampere, 125 Volts



SNAP53621A




SNAP5362LATRA

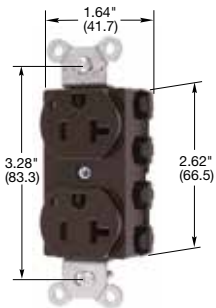

SNAP5362L



SNAP5362GYLTRA



SNAP52611

Dimensions in Inches (mm)

SNAPConnect® Extra Heavy Duty Receptacles

Duplex

| Description | Color | Catalog Number | Catalog Number | |
|--|--|------------------------|------------------------|----------------------|
| Specification grade, finder groove, nylon face, modular receptacle which requires pigtailed connector on page A-15. | Black | SNAP5262BKA | SNAP5362BKA | |
| | Brown | SNAP5262A | SNAP5362A | |
| | Gray | SNAP5262GYA | SNAP5362GYA | |
| | Ivory | SNAP5262IA | SNAP5362IA | |
| | Light Almond | SNAP5262LAA | SNAP5362LAA | |
| | Red | SNAP5262RA | SNAP5362RA | |
| Specification grade, smooth, nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP5262BKNA | SNAP5362BKNA | |
| | Brown | SNAP5262NA | SNAP5362NA | |
| | Gray | SNAP5262GYNA | SNAP5362GYNA | |
| | Ivory | SNAP5262INA | SNAP5362INA | |
| | Light Almond | SNAP5262LANA | SNAP5362LANA | |
| | Red | SNAP5262RNA | SNAP5362RNA | |
| Specification grade, Tamper-Resistant, smooth nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP5262BKTRA | SNAP5362BKTRA | |
| | Blue | SNAP5262BLTRA | SNAP5362BLTRA | |
| | Brown | SNAP5262TRA | SNAP5362TRA | |
| | Gray | SNAP5262GYTRA | SNAP5362GYTRA | |
| | Ivory | SNAP5262ITRA | SNAP5362ITRA | |
| | Light Almond | SNAP5262LATRA | SNAP5362LATRA | |
| Specification grade, Tamper-Resistant, Split Circuit, smooth nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP5262BKSTRA | SNAP5362BKSTRA | |
| | Blue | SNAP5262BLSTRA | SNAP5362BLSTRA | |
| | Brown | SNAP5262STRA | SNAP5362STRA | |
| | Gray | SNAP5262GYSTRA | SNAP5362GYSTRA | |
| | Ivory | SNAP5262ISCTRA | SNAP5362ISCTRA | |
| | Light Almond | SNAP5262LASCTRA | SNAP5362LASCTRA | |
| Isolated ground ^A , Specification grade, Tamper-Resistant. | Red | SNAP5262RSTRA | SNAP5362RSTRA | |
| | White | SNAP5262WSTRA | SNAP5362WSTRA | |
| | Orange | SNAP5262IGTRA | SNAP5362IGTRA | |
| | Specification grade, with Power Indicating LED, smooth nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP5262BKL | SNAP5362BKL |
| | | Blue | SNAP5262BLL | SNAP5362BLL |
| | | Brown | SNAP5262L | SNAP5362L |
| Gray | | SNAP5262GYL | SNAP5362GYL | |
| Ivory | | SNAP5262IL | SNAP5362IL | |
| Light Almond | | SNAP5262LAL | SNAP5362LAL | |
| Isolated ground ^A , Specification grade, with Power Indicating LED. | Red | SNAP5262RL | SNAP5362RL | |
| | White | SNAP5262WL | SNAP5362WL | |
| | Orange | SNAP5262IGL | SNAP5362IGL | |
| | Specification grade, Tamper-Resistant, with Power Indicating LED, smooth nylon face, modular receptacle which requires pigtailed connector on page A-15. Assembled in USA. | Black | SNAP5262BKLTR | SNAP5362BKLTR |
| | | Blue | SNAP5262BLLTR | SNAP5362BLLTR |
| | | Brown | SNAP5262LTR | SNAP5362LTR |
| Gray | | SNAP5262GYLTR | SNAP5362GYLTR | |
| Ivory | | SNAP5262ILTR | SNAP5362ILTR | |
| Light Almond | | SNAP5262LALTR | SNAP5362LALTR | |
| Isolated ground ^A , Specification grade, TR with Power Indicating LED. | Red | SNAP5262RLTR | SNAP5362RLTR | |
| | White | SNAP5262WLTR | SNAP5362WLTR | |
| | Orange | SNAP5262IGLTR | SNAP5362IGLTR | |

SNAPConnect® Extra Heavy Duty Standard Single Receptacles

| Color | Standard Duplex | | Standard Duplex Tamper-Resistant | |
|--------------|-------------------|-------------------|----------------------------------|---------------------|
| | 15A 125V | 20A 125V | 15A 125V | 20A 125V |
| Almond | SNAP5261AL | SNAP5361AL | SNAP5261ALTR | SNAP5361ALTR |
| Black | SNAP5261BK | SNAP5361BK | SNAP5261BKTR | SNAP5361BKTR |
| Blue | SNAP5261BL | SNAP5361BL | SNAP5261BLTR | SNAP5361BLTR |
| Brown | SNAP5261 | SNAP5361 | SNAP5261TR | SNAP5361TR |
| Gray | SNAP5261GY | SNAP5361GY | SNAP5261GYTR | SNAP5361GYTR |
| Ivory | SNAP5261I | SNAP5361I | SNAP5261ITR | SNAP5361ITR |
| Light Almond | SNAP5261LA | SNAP5361LA | SNAP5261LATR | SNAP5361LATR |
| Red | SNAP5261R | SNAP5361R | SNAP5261RTR | SNAP5361RTR |
| White | SNAP5261W | SNAP5361W | SNAP5261WTR | SNAP5361WTR |

Straight Blade Devices



15 and 20 Ampere, 125 Volts



15A 125V
NEMA 5-15R
UL CSA
0.5 HP








20A 125V
NEMA 5-20R
UL CSA
1 HP

SNAPConnect® Extra Heavy Duty Receptacles

Style Line® Decorator

| Description | Color | Catalog Number | | |
|--|--|------------------------|------------------------|-----------------------|
| Specification grade, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector below. | Black | SNAP2152BKA | SNAP2162BKA | |
| | Brown | SNAP2152A | SNAP2162A | |
| | Gray | SNAP2152GYA | SNAP2162GYA | |
| | Ivory | SNAP2152IA | SNAP2162IA | |
| | Light Almond | SNAP2152LAA | SNAP2162LAA | |
| | Red | SNAP2152RA | SNAP2162RA | |
| Specification grade, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector below. Assembled in USA. | White | SNAP2152WA | SNAP2162WA | |
| | Black | SNAP2152BKNA | SNAP2162BKNA | |
| | Brown | SNAP2152NA | SNAP2162NA | |
| | Gray | SNAP2152GYNA | SNAP2162GYNA | |
| | Ivory | SNAP2152INA | SNAP2162INA | |
| | Light Almond | SNAP2152LANA | SNAP2162LANA | |
| Specification grade, Tamper-Resistant, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector below. Assembled in USA. | Red | SNAP2152RNA | SNAP2162RNA | |
| | White | SNAP2152WNA | SNAP2162WNA | |
| | Black | SNAP2152BKTRA | SNAP2162BKTRA | |
| | Blue | SNAP2152BLTRA | SNAP2162BLTRA | |
| | Brown | SNAP2152TRA | SNAP2162TRA | |
| | Gray | SNAP2152GYTRA | SNAP2162GYTRA | |
| Specification grade, Tamper-Resistant, Split Circuit, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector below. Assembled in USA. | Ivory | SNAP2152ITRA | SNAP2162ITRA | |
| | Light Almond | SNAP2152LATRA | SNAP2162LATRA | |
| | Red | SNAP2152RTRA | SNAP2162RTRA | |
| | White | SNAP2152WTRA | SNAP2162WTRA | |
| | Black | SNAP2152BKSCTRA | SNAP2162BKSCTRA | |
| | Blue | SNAP2152BLSCTRA | SNAP2162BLSCTRA | |
| Specification grade, Tamper-Resistant, Split Circuit, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector below. Assembled in USA. | Brown | SNAP2152SCTRA | SNAP2162SCTRA | |
| | Gray | SNAP2152GYSCTRA | SNAP2162GYSCTRA | |
| | Ivory | SNAP2152ISCTRA | SNAP2162ISCTRA | |
| | Light Almond | SNAP2152LASCTRA | SNAP2162LASCTRA | |
| | Red | SNAP2152RSCTRA | SNAP2162RSCTRA | |
| | White | SNAP2152WSCTRA | SNAP2162WSCTRA | |
| Isolated ground ^A , Specification grade, Tamper-Resistant. | Orange | SNAP2152IGTRA | SNAP2162IGTRA | |
| Specification grade, with Power Indicating LED, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector below. Assembled in USA. | Black | SNAP2152BKL | SNAP2162BKL | |
| | Blue | SNAP2152BLL | SNAP2162BLL | |
| | Brown | SNAP2152L | SNAP2162L | |
| | Gray | SNAP2152GYL | SNAP2162GYL | |
| | Ivory | SNAP2152IL | SNAP2162IL | |
| | Light Almond | SNAP2152LAL | SNAP2162LAL | |
| Specification grade, with Power Indicating LED, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector below. Assembled in USA. | Red | SNAP2152RL | SNAP2162RL | |
| | White | SNAP2152WL | SNAP2162WL | |
| | Isolated ground ^A , Specification grade, with Power Indicating LED. | Orange | SNAP2152IGL | SNAP2162IGL |
| | Specification grade, Tamper-Resistant, with Power Indicating LED, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector below. Assembled in USA. | Black | SNAP2152BKLTRA | SNAP2162BKLTRA |
| | | Blue | SNAP2152BLLTRA | SNAP2162BLLTRA |
| | | Brown | SNAP2152LTRA | SNAP2162LTRA |
| Gray | | SNAP2152GYLTRA | SNAP2162GYLTRA | |
| Ivory | | SNAP2152ILTRA | SNAP2162ILTRA | |
| Light Almond | | SNAP2152LALTRA | SNAP2162LALTRA | |
| Specification grade, Tamper-Resistant, with Power Indicating LED, Style Line® decorator, flush, nylon face, modular receptacle which requires pigtailed connector below. Assembled in USA. | Red | SNAP2152RLTRA | SNAP2162RLTRA | |
| | White | SNAP2152WLTRA | SNAP2162WLTRA | |
| | Isolated ground ^A , Specification grade, with Power Indicating LED. | Orange | SNAP2152IGLTRA | SNAP2162IGLTRA |

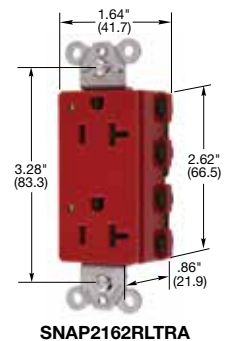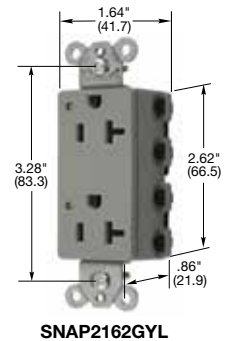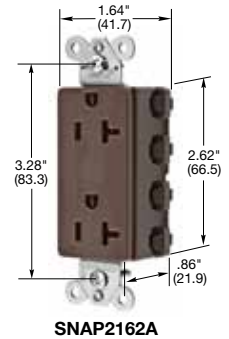

Note: ^ASee section N additional information on isolated ground devices.
See page Tech-10 for Tamper-Resistant and LED Power Indicators descriptions.
See pages A-47 and A-48 for accessories.
See section O for wallplates.

SNAPConnect® Right Angle Pigtailed Connector

| Description | Wire Type | General Use | Assembled in USA |
|---|-----------|----------------|------------------|
| Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material. | Solid | SNAP1RA | SNAP1RNA |
| | Stranded | SNAP2RA | SNAP2RNA |


Note: For Assembled in USA products, must order connector with NA suffix.

Dimensions in Inches (mm)


Straight Blade Devices




15 and 20 Ampere, 125 Volts

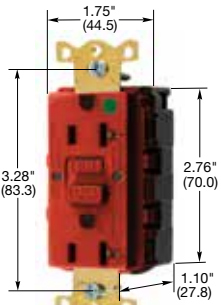


GFRST83SNAPR




GFTWRST83SNAPI



SNAP8300USBW

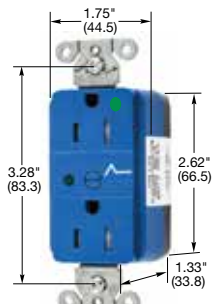

SNAP8262S



SNAP1RA

Dimensions in Inches (mm)



SNAPConnect® GFCI LED Hospital Grade ●

| Description | Color | Catalog Number | |
|--|--------------|----------------------|----------------------|
| Hospital Grade SNAPConnect GFCI LED, self-grounding staple, requires connector below, sold separately. Add "NA" suffix for devices Assembled in USA. | Almond | GFRST82SNAPAL | GFRST83SNAPAL |
| | Black | GFRST82SNAPBK | GFRST83SNAPBK |
| | Brown | GFRST82SNAP | GFRST83SNAP |
| | Gray | GFRST82SNAPGY | GFRST83SNAPGY |
| | Ivory | GFRST82SNAPI | GFRST83SNAPI |
| | Light Almond | GFRST82SNAPLA | GFRST83SNAPLA |
| | Red | GFRST82SNAPR | GFRST83SNAPR |
| | White | GFRST82SNAPW | GFRST83SNAPW |

SNAPConnect® GFCI LED Hospital Grade ● Tamper and Weather Resistant



| Description | Color | Catalog Number | |
|--|--------------|------------------------|------------------------|
| Hospital Grade SNAPConnect GFCI TR/WR, self-grounding staple, requires connector below, sold separately. Add "NA" suffix for devices Assembled in USA. | Almond | GFTWRST82SNAPAL | GFTWRST83SNAPAL |
| | Black | GFTWRST82SNAPBK | GFTWRST83SNAPBK |
| | Brown | GFTWRST82SNAP | GFTWRST83SNAP |
| | Gray | GFTWRST82SNAPGY | GFTWRST83SNAPGY |
| | Ivory | GFTWRST82SNAPI | GFTWRST83SNAPI |
| | Light Almond | GFTWRST82SNAPLA | GFTWRST83SNAPLA |
| | Red | GFTWRST82SNAPR | GFTWRST83SNAPR |
| | White | GFTWRST82SNAPW | GFTWRST83SNAPW |

Note: GFCI type receptacles should not be used in critical care patient areas or for electrical life support equipment applications because of the possibility of power interruption. All GFCI receptacles are furnished with a matching color nylon wallplate, 20 amp feed-through capability.

SNAPConnect® USB Charger Hospital Grade ● Duplex Receptacles



| Description | Color | Catalog Number | |
|---|--------------|----------------------|----------------------|
| Hospital Grade SNAPConnect USB Charger, Tamper-Resistant Style Line® decorator duplex receptacle, two USB type 2.0 ports 3 Amp, 5 Volt DC, 15 or 20 Amp, 125 Volt AC. | Black | SNAP8200USBBK | SNAP8300USBBK |
| | Brown | SNAP8200USB | SNAP8300USB |
| | Gray | SNAP8200USBGY | SNAP8300USBGY |
| | Ivory | SNAP8200USBI | SNAP8300USBI |
| | Light Almond | SNAP8200USBLA | SNAP8300USBLA |
| | Red | SNAP8200USBR | SNAP8300USBR |
| | White | SNAP8200USBW | SNAP8300USBW |

SNAPConnect® Surge Protection Hospital Grade ● Tamper-Resistant Receptacle with Power Indicating LED



| Description | Color | Catalog Number | |
|---|--------------|--------------------|--------------------|
| Hospital Grade SNAPConnect Surge suppression, Tamper-Resistant, smooth face, duplex receptacle. | Blue | SNAP8262S | SNAP8362S |
| | Gray | SNAP8262GYS | SNAP8362GYS |
| | Ivory | SNAP8262IS | SNAP8362IS |
| | Light Almond | SNAP8262LAS | SNAP8362LAS |
| | Red | SNAP8262RS | SNAP8362RS |
| | White | SNAP8262WS | SNAP8362WS |

SNAPConnect® Right Angle Pigtailed Terminal


| Description | Wire Type | General Use Catalog Number | Assembled in USA Catalog Number |
|---|-----------|----------------------------|---------------------------------|
| Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material. | Solid | SNAP1RA | SNAP1RNA |
| | Stranded | SNAP2RA | SNAP2RNA |

Note: See page Tech-10 for Tamper-Resistant, Weather Resistant and LED Power Indicators descriptions.

Straight Blade Devices




15 and 20 Ampere, 125 Volts



SNAPConnect® GFCI LED


| Description | Color | Catalog Number | |
|---|--------------|----------------------|----------------------|
| SNAPConnect GFCI LED, self-grounding staple, requires connector below, sold separately. Add "NA" suffix for devices Assembled in USA. | Almond | GFRST15SNAPAL | GFRST20SNAPAL |
| | Black | GFRST15SNAPBK | GFRST20SNAPBK |
| | Brown | GFRST15SNAP | GFRST20SNAP |
| | Gray | GFRST15SNAPGY | GFRST20SNAPGY |
| | Ivory | GFRST15SNAPI | GFRST20SNAPI |
| | Light Almond | GFRST15SNAPLA | GFRST20SNAPLA |
| | Red | GFRST15SNAPR | GFRST20SNAPR |
| | White | GFRST15SNAPW | GFRST20SNAPW |



GFRST15SNAPGY

SNAPConnect® GFCI LED, Tamper and Weather Resistant

| Description | Color | Catalog Number | |
|---|--------------|------------------------|------------------------|
| SNAPConnect GFCI TR/WR, self-grounding staple, requires connector below, sold separately. Add "NA" suffix for devices Assembled in USA. | Almond | GFTWRST15SNAPAL | GFTWRST20SNAPAL |
| | Black | GFTWRST15SNAPBK | GFTWRST20SNAPBK |
| | Brown | GFTWRST15SNAP | GFTWRST20SNAP |
| | Gray | GFTWRST15SNAPGY | GFTWRST20SNAPGY |
| | Ivory | GFTWRST15SNAPI | GFTWRST20SNAPI |
| | Light Almond | GFTWRST15SNAPLA | GFTWRST20SNAPLA |
| | Red | GFTWRST15SNAPR | GFTWRST20SNAPR |
| | White | GFTWRST15SNAPW | GFTWRST20SNAPW |




GFTWRST20SNAPI

Note: GFCI type receptacles should not be used in critical care patient areas or for electrical life support equipment applications because of the possibility of power interruption. All GFCI receptacles are furnished with a matching color nylon wallplate, 20 amp feed-through capability.



SNAPConnect® USB Charger, Duplex Receptacles

| Description | Color | Catalog Number | |
|--|--------------|--------------------|--------------------|
| SNAPConnect USB Charger, Tamper-Resistant Style Line® decorator duplex receptacle, two USB type 2.0 ports 3 Amp, 5 Volt DC, 15 or 20 Amp, 125 Volt AC. | Black | SNAP15USBK | SNAP20USBK |
| | Brown | SNAP15USB | SNAP20USB |
| | Gray | SNAP15USBGY | SNAP20USBGY |
| | Ivory | SNAP15USB | SNAP20USB |
| | Light Almond | SNAP15USBLA | SNAP20USBLA |
| | White | SNAP15USBW | SNAP20USBW |




SNAP15USBW



SNAPConnect® Surge Protection, Tamper-Resistant Receptacle with Power Indicating LED

| Description | Color | Catalog Number | |
|--|--------------|--------------------|--------------------|
| SNAPConnect Surge suppression, Tamper-Resistant, smooth face, duplex receptacle. | Blue | SNAP5262S | SNAP5362S |
| | Gray | SNAP5262GYS | SNAP5362GYS |
| | Ivory | SNAP5262IS | SNAP5362IS |
| | Light Almond | SNAP5262LAS | SNAP5362LAS |
| | White | SNAP5262WS | SNAP5362WS |




SNAP5262S

SNAPConnect® Tester

| Description | Catalog Number |
|---|----------------|
| Circuit Tester for SNAPConnect receptacle terminals, GFCI and standard receptacles. | SNAPCTG |

Note: See page Tech-10 for Tamper-Resistant, Weather Resistant and LED Power Indicators descriptions.




SNAPCTG

Dimensions in Inches (mm)

Straight Blade Devices




15 and 20 Ampere, 125 Volts

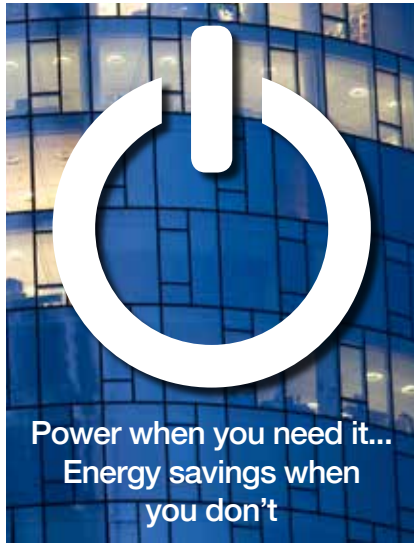


- ⊖ Permanent power symbol remains clearly visible after installation
- ⊖ Control both outlets per device for 100% controlled applications or just one outlet for 50% controlled applications
- ⊖ Ideal for commercial buildings, retail, schools, hotel rooms
- ⊖ Part of the Hubbell Load:Logic™ Plug Control system

SNAPConnect® Permanently Marked Receptacles



SNAP5362C1W


| Duplex | Color | One Controlled Face Split Circuit Hot Tab | | Two Controlled Faces | | |
|--|--|---|-----------------|----------------------|-----------------|-----------------|
| | | 15 Amp | 20 Amp | 15 Amp | 20 Amp | |
| SNAPConnect® standard duplex, permanently marked for use with automatic plugload controls. | Black | SNAP5262C1BK | SNAP5362C1BK | SNAP5262C2BK | SNAP5362C2BK | |
| | Blue | SNAP5262C1BL | SNAP5362C1BL | SNAP5262C2BL | SNAP5362C2BL | |
| | Brown | SNAP5262C1 | SNAP5362C1 | SNAP5262C2 | SNAP5362C2 | |
| | Gray | SNAP5262C1GY | SNAP5362C1GY | SNAP5262C2GY | SNAP5362C2GY | |
| | Green | SNAP5262C1GN | SNAP5362C1GN | SNAP5262C2GN | SNAP5362C2GN | |
| | Ivory | SNAP5262C1I | SNAP5362C1I | SNAP5262C2I | SNAP5362C2I | |
| | Lt. Almond | SNAP5262C1LA | SNAP5362C1LA | SNAP5262C2LA | SNAP5362C2LA | |
| | Red | SNAP5262C1R | SNAP5362C1R | SNAP5262C2R | SNAP5362C2R | |
| | White | SNAP5262C1W | SNAP5362C1W | SNAP5262C2W | SNAP5362C2W | |
| | SNAPConnect® Tamper-Resistant, standard duplex, permanently marked for use with automatic plugload controls. | Black | SNAP5262C1BKTRA | SNAP5362C1BKTRA | SNAP5262C2BKTRA | SNAP5362C2BKTRA |
| | | Brown | SNAP5262C1TRA | SNAP5362C1TRA | SNAP5262C2TRA | SNAP5362C2TRA |
| Gray | | SNAP5262C1GYTRA | SNAP5362C1GYTRA | SNAP5262C2GYTRA | SNAP5362C2GYTRA | |
| Green | | SNAP5262C1GNTRA | SNAP5362C1GNTRA | SNAP5262C2GNTRA | SNAP5362C2GNTRA | |
| Ivory | | SNAP5262C1ITRA | SNAP5362C1ITRA | SNAP5262C2ITRA | SNAP5362C2ITRA | |
| Lt. Almond | | SNAP5262C1LATRA | SNAP5362C1LATRA | SNAP5262C2LATRA | SNAP5362C2LATRA | |
| White | SNAP5262C1WTRA | SNAP5362C1WTRA | SNAP5262C2WTRA | SNAP5362C2WTRA | | |



SNAP2162C2I

Style Line® Decorator

| | | | | | | |
|---|---|-----------------|-----------------|-----------------|-----------------|-----------------|
| SNAPConnect® decorator duplex, permanently marked for use with automatic plugload controls. | Black | SNAP2152C1BK | SNAP2162C1BK | SNAP2152C2BK | SNAP2162C2BK | |
| | Blue | SNAP2152C1BL | SNAP2162C1BL | SNAP2152C2BL | SNAP2162C2BL | |
| | Brown | SNAP2152C1 | SNAP2162C1 | SNAP2152C2 | SNAP2162C2 | |
| | Gray | SNAP2152C1GY | SNAP2162C1GY | SNAP2152C2GY | SNAP2162C2GY | |
| | Green | SNAP2152C1GN | SNAP2162C1GN | SNAP2152C2GN | SNAP2162C2GN | |
| | Ivory | SNAP2152C1I | SNAP2162C1I | SNAP2152C2I | SNAP2162C2I | |
| | Lt. Almond | SNAP2152C1LA | SNAP2162C1LA | SNAP2152C2LA | SNAP2162C2LA | |
| | Red | SNAP2152C1R | SNAP2162C1R | SNAP2152C2R | SNAP2162C2R | |
| | White | SNAP2152C1W | SNAP2162C1W | SNAP2152C2W | SNAP2162C2W | |
| | SNAPConnect® Tamper-Resistant, decorator duplex, permanently marked for use with automatic plugload controls. | Black | SNAP2152C1BKTRA | SNAP2162C1BKTRA | SNAP2152C2BKTRA | SNAP2162C2BKTRA |
| | | Brown | SNAP2152C1TRA | SNAP2162C1TRA | SNAP2152C2TRA | SNAP2162C2TRA |
| Gray | | SNAP2152C1GYTRA | SNAP2162C1GYTRA | SNAP2152C2GYTRA | SNAP2162C2GYTRA | |
| Green | | SNAP2152C1GNTRA | SNAP2162C1GNTRA | SNAP2152C2GNTRA | SNAP2162C2GNTRA | |
| Ivory | | SNAP2152C1ITRA | SNAP2162C1ITRA | SNAP2152C2ITRA | SNAP2162C2ITRA | |
| Lt. Almond | | SNAP2152C1LATRA | SNAP2162C1LATRA | SNAP2152C2LATRA | SNAP2162C2LATRA | |
| White | SNAP2152C1WTRA | SNAP2162C1WTRA | SNAP2152C2WTRA | SNAP2162C2WTRA | | |



SNAP1RA

SNAPConnect® Right Angle Pigtailed Connector

| Description | Solid Wire | Stranded Wire |
|--|------------|---------------|
| Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2; Polycarbonate housing material. | SNAP1RA | SNAP2RA |

Permanent Controlled Receptacle Label

| Description | Catalog Number |
|---|----------------|
| For use in retrofit applications where indication of a controlled receptacle is required. This label is UL approved for marking and labeling. 60 labels of each per pack. | CL60 |

Dimensions in Inches (mm)

Straight Blade Devices








15 and 20 Ampere, 125 Volts

Industrial Grade, Permanently Marked Tamper-Resistant Receptacles



| Duplex | Color | One Controlled Face Split Circuit Hot Tab | | Two Controlled Faces | |
|---|------------|---|----------------|----------------------|----------------|
| | | 15 Amp | 20 Amp | 15 Amp | 20 Amp |
| Smooth nylon face, duplex, permanently marked for use with automatic outlet control systems, back and side wired. | Black | HBL5262C1BLKTR | HBL5362C1BLKTR | HBL5262C2BLKTR | HBL5362C2BLKTR |
| | Blue | HBL5262C1BLTR | HBL5362C1BLTR | HBL5262C2BLTR | HBL5362C2BLTR |
| | Brown | HBL5262C1TR | HBL5362C1TR | HBL5262C2TR | HBL5362C2TR |
| | Gray | HBL5262C1GRYTR | HBL5362C1GRYTR | HBL5262C2GRYTR | HBL5362C2GRYTR |
| | Ivory | HBL5262C1ITR | HBL5362C1ITR | HBL5262C2ITR | HBL5362C2ITR |
| | Lt. Almond | HBL5262C1LATR | HBL5362C1LATR | HBL5262C2LATR | HBL5362C2LATR |
| | Red | HBL5262C1RTR | HBL5362C1RTR | HBL5262C2RTR | HBL5362C2RTR |
| | White | HBL5262C1WHITR | HBL5362C1WHITR | HBL5262C2WHITR | HBL5362C2WHITR |

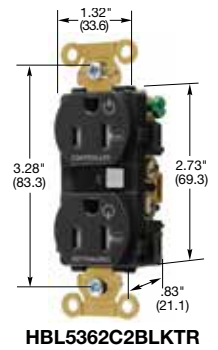

Permanently Marked Receptacles

| Duplex | Color | One Controlled Face Split Circuit Hot Tab | | Two Controlled Faces | |
|---|-------------|---|-------------|----------------------|-------------|
| | | 15 Amp | 20 Amp | 15 Amp | 20 Amp |
| Smooth nylon face, duplex, permanently marked for use with automatic outlet control systems, back and side wired. | Black | BR15C1BLK | BR20C1BLK | BR15C2BLK | BR20C2BLK |
| | Blue | BR15C1BL | BR20C1BL | BR15C2BL | BR20C2BL |
| | Brown | BR15C1 | BR20C1 | BR15C2 | BR20C2 |
| | Gray | BR15C1GRY | BR20C1GRY | BR15C2GRY | BR20C2GRY |
| | Green | BR15C1GN | BR20C1GN | BR15C2GN | BR20C2GN |
| | Ivory | BR15C1I | BR20C1I | BR15C2I | BR20C2I |
| | Lt. Almond | BR15C1LA | BR20C1LA | BR15C2LA | BR20C2LA |
| | Red | BR15C1R | BR20C1R | BR15C2R | BR20C2R |
| White | BR15C1WHI | BR20C1WHI | BR15C2WHI | BR20C2WHI | |
| Smooth nylon face, Tamper-Resistant, duplex, permanently marked for use with automatic outlet control systems, back and side wired. | Black | BR15C1BLKTR | BR20C1BLKTR | BR15C2BLKTR | BR20C2BLKTR |
| | Blue | BR15C1BLTR | BR20C1BLTR | BR15C2BLTR | BR20C2BLTR |
| | Brown | BR15C1TR | BR20C1TR | BR15C2TR | BR20C2TR |
| | Gray | BR15C1GRYTR | BR20C1GRYTR | BR15C2GRYTR | BR20C2GRYTR |
| | Green | BR15C1GNTR | BR20C1GNTR | BR15C2GNTR | BR20C2GNTR |
| | Ivory | BR15C1ITR | BR20C1ITR | BR15C2ITR | BR20C2ITR |
| | Lt. Almond | BR15C1LATR | BR20C1LATR | BR15C2LATR | BR20C2LATR |
| | Red | BR15C1RTR | BR20C1RTR | BR15C2RTR | BR20C2RTR |
| White | BR15C1WHITR | BR20C1WHITR | BR15C2WHITR | BR20C2WHITR | |

Style Line® Decorator

| | | | | | |
|---|-------------|-------------|-------------|-------------|-------------|
| Smooth nylon face, decorator duplex, permanently marked for use with automatic outlet control systems, back and side wired. | Black | DR15C1BLK | DR20C1BLK | DR15C2BLK | DR20C2BLK |
| | Blue | DR15C1BL | DR20C1BL | DR15C2BL | DR20C2BL |
| | Brown | DR15C1 | DR20C1 | DR15C2 | DR20C2 |
| | Gray | DR15C1GRY | DR20C1GRY | DR15C2GRY | DR20C2GRY |
| | Green | DR15C1GN | DR20C1GN | DR15C2GN | DR20C2GN |
| | Ivory | DR15C1I | DR20C1I | DR15C2I | DR20C2I |
| | Lt. Almond | DR15C1LA | DR20C1LA | DR15C2LA | DR20C2LA |
| | Red | DR15C1R | DR20C1R | DR15C2R | DR20C2R |
| White | DR15C1WHI | DR20C1WHI | DR15C2WHI | DR20C2WHI | |
| Smooth nylon face, Tamper-Resistant, decorator duplex, permanently marked for use with automatic outlet control systems, back and side wired. | Black | DR15C1BLKTR | DR20C1BLKTR | DR15C2BLKTR | DR20C2BLKTR |
| | Blue | DR15C1BLTR | DR20C1BLTR | DR15C2BLTR | DR20C2BLTR |
| | Brown | DR15C1TR | DR20C1TR | DR15C2TR | DR20C2TR |
| | Gray | DR15C1GRYTR | DR20C1GRYTR | DR15C2GRYTR | DR20C2GRYTR |
| | Green | DR15C1GNTR | DR20C1GNTR | DR15C2GNTR | DR20C2GNTR |
| | Ivory | DR15C1ITR | DR20C1ITR | DR15C2ITR | DR20C2ITR |
| | Lt. Almond | DR15C1LATR | DR20C1LATR | DR15C2LATR | DR20C2LATR |
| | Red | DR15C1RTR | DR20C1RTR | DR15C2RTR | DR20C2RTR |
| White | DR15C1WHITR | DR20C1WHITR | DR15C2WHITR | DR20C2WHITR | |

Permanent Controlled Receptacle Label

| Description | Catalog Number |
|---|----------------|
| For use in retrofit applications where indication of a controlled receptacle is required. This label is UL approved for marking and labeling. 60 labels of each per pack. | CL60 |

Dimensions in Inches (mm)



Features and Benefits

Switched Receptacles for Automatic Receptacle Control

The Load Control Switched Duplex Receptacle is the latest addition to Hubbell Wiring Device-Kellems' comprehensive offering for automatic receptacle control requirements. Featuring Hubbell's exclusive and patented tamper-resistant mechanism as standard, the unit is capable of controlling other receptacles downstream in the branch circuit.

Hubbell offers this innovative device in wired and wireless options, which are both fully compatible with existing systems. This allows for easy additions and changes to meet current energy codes and standards in current facilities.

Common Features

- Half Controlled or Fully Controlled 15A or 20A Options
- Hubbell's Exclusive Tamper-Resistant Mechanism
- Downstream Branch Circuit Control
- Brass Strap
- Permanent NEC 406.3 (E) Markings
- UL498B SA Listed Receptacles with Integral Switching Comply with Supplement SA
- Fed Spec W596G
- Hospital Grade Series Available



HBL5362LC2W



HBL5362RFC2W



Wired Switched Receptacles

- The wired series is designed to be automatically controlled by a low voltage signal from either occupancy sensors, or any other type of control device capable of performing this task, such as a time-of-day control device



Wireless Switched Receptacles

- The Clear Connect™ enabled wireless series is a wireless receiver that is controlled by the corresponding occupancy sensor

Wired Switched Receptacles for Automatic Receptacle Control

| Description | Color | 15A | | 20A | |
|---|------------|---------------|------------------|---------------|------------------|
| | | Split Circuit | Fully Controlled | Split Circuit | Fully Controlled |
| Auto ON/Auto OFF control. Capable of controlling additional receptacles downstream. | Black | HBL5262LC1BK | HBL5262LC2BK | HBL5362LC1BK | HBL5362LC2BK |
| | Brown | HBL5262LC1 | HBL5262LC2 | HBL5362LC1 | HBL5362LC2 |
| | Gray | HBL5262LC1GY | HBL5262LC2GY | HBL5362LC1GY | HBL5362LC2GY |
| | Green | HBL5262LC1GN | HBL5262LC2GN | HBL5362LC1GN | HBL5362LC2GN |
| | Ivory | HBL5262LC1I | HBL5262LC2I | HBL5362LC1I | HBL5362LC2I |
| | Lt. Almond | HBL5262LC1LA | HBL5262LC2LA | HBL5362LC1LA | HBL5362LC2LA |
| | White | HBL5262LC1W | HBL5262LC2W | HBL5362LC1W | HBL5362LC2W |

Note: See Section E, page E-31 for technical information. Special order for hospital grade devices.



HBL5362LC2W

Wireless Switched Receptacles for Automatic Receptacle Control

| Description | Color | 15A | | 20A | |
|---|------------|---------------|------------------|---------------|------------------|
| | | Split Circuit | Fully Controlled | Split Circuit | Fully Controlled |
| Wireless receiver Auto ON/Auto OFF. Capable of controlling additional receptacles downstream. | Black | HBL5262RFC1BK | HBL5262RFC2BK | HBL5362RFC1BK | HBL5362RFC2BK |
| | Brown | HBL5262RFC1 | HBL5262RFC2 | HBL5362RFC1 | HBL5362RFC2 |
| | Gray | HBL5262RFC1GY | HBL5262RFC2GY | HBL5362RFC1GY | HBL5362RFC2GY |
| | Green | HBL5262RFC1GN | HBL5262RFC2GN | HBL5362RFC1GN | HBL5362RFC2GN |
| | Ivory | HBL5262RFC1I | HBL5262RFC2I | HBL5362RFC1I | HBL5362RFC2I |
| | Lt. Almond | HBL5262RFC1LA | HBL5262RFC2LA | HBL5362RFC1LA | HBL5362RFC2LA |
| | White | HBL5262RFC1W | HBL5262RFC2W | HBL5362RFC1W | HBL5362RFC2W |

Note: See Section E, page E-31 for technical information. Special order for hospital grade devices.



HBL5362RFC2W


Straight Blade Devices



New Codes and Standards mandates that 50% of all receptacles in private offices, open offices and computer classrooms must be automatically controlled by occupancy or time based schedules. This also includes outlets in modular furniture. Hubbell provides solutions for compliance that are cost effective and installer friendly. Find out more design resources at www.hubbell-wiring.com/energy.aspx


Wired

Utilizing low voltage wiring provides installers with a familiar method of wiring and installation. Specify Hubbell's new load control receptacle to meet this requirement. Utilize alternating outlet or split receptacle wiring as required to control at least 50% of the outlets in the space.

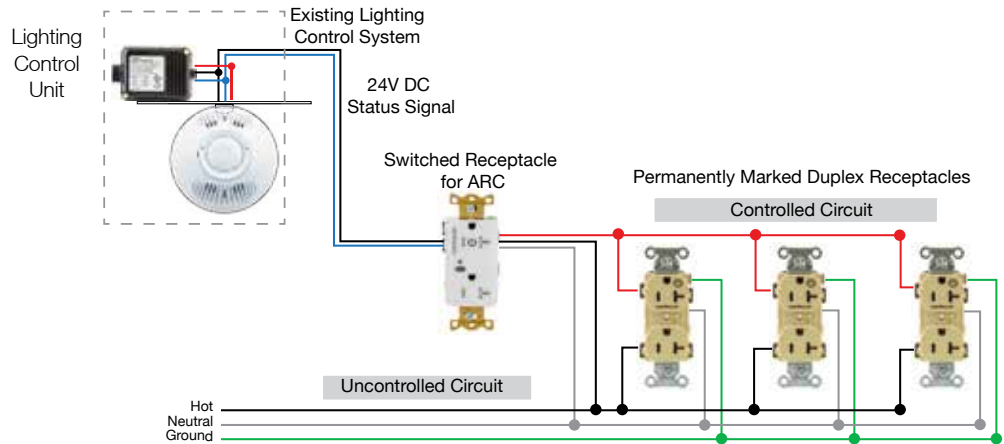

Wireless

Wireless communication takes complexity out of retrofit and difficult installations by eliminating low voltage wires running between lighting and receptacle control units. This gives installers flexibility to quickly deploy, add additional devices, and configure and re-configure the system as needed. Hubbell's WL series controls utilize Clear Connect™ communication and are compatible with other Clear Connect™ devices, such as Hubbell's wireless occupancy sensors.

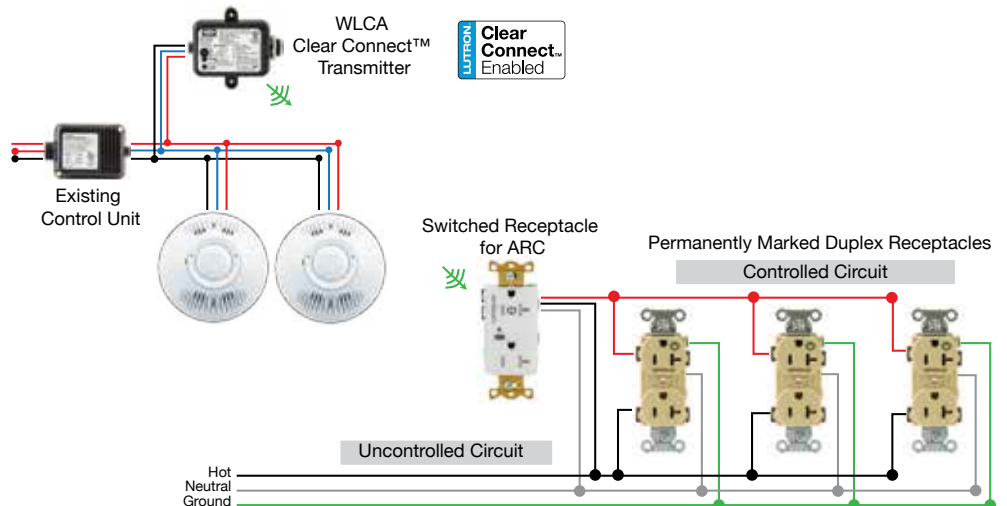

Codes and Standards

ASHRAE 90.1

ASHRAE 90.1 is the leading energy building efficiency standard for commercial buildings in North America. Section 8.4.2, ASHRAE 90.1-2010 instituted the requirement that in certain spaces at least 50% of all receptacles are to be controlled by either time of day control device, an occupancy sensor or by an automated signal from another control or alarm system.

Clear Connect™ is a registered trademark of Lutron Electronics Co., Inc.



California Energy Commission Title 24

Section 130.5(d) of California Energy Commission Title 24, Part 6 - 2013 code requires receptacles to have automatic shutoff controls in certain spaces in all buildings.




NEC 2017


Article 406.3(E) of the NEC® 2017 edition selected the standby (⏻) symbol as the marking for a receptacle connected to an automatic control system.




15 and 20 Ampere, 125 Volts




8200LA




8200TRA



8200REDLTRA



2172LATRA



2182IVLTRA

Dimensions in Inches (mm)

Hubbell-PRO Heavy Duty Hospital Grade Receptacles



**15A 125V
NEMA 5-15R
UL CSA
0.5 HP**



**20A 125V
NEMA 5-20R
UL CSA
1 HP**

Duplex

| | Color | Catalog Number | |
|--|--------------|--------------------|--------------------|
| Hospital grade, smooth nylon face, back and side wired. Assembled in USA. | Black | 8200BK | 8300BK |
| | Brown | 8200 | 8300 |
| | Gray | 8200GY | 8300GY |
| | Ivory | 8200IV | 8300IV |
| | Light Almond | 8200LA | 8300LA |
| | Red | 8200RED | 8300RED |
| | White | 8200WHI | 8300WHI |
| Hospital grade, Tamper-Resistant, smooth nylon face, back and side wired. Assembled in USA. | Black | 8200BKTRA | 8300BKTRA |
| | Brown | 8200TRA | 8300TRA |
| | Gray | 8200GYTRA | 8300GYTRA |
| | Ivory | 8200IVTRA | 8300IVTRA |
| | Light Almond | 8200LATRA | 8300LATRA |
| | Red | 8200REDTRA | 8300REDTRA |
| | White | 8200WTRA | 8300WTRA |
| Hospital grade, with Power Indicating LED, smooth nylon face, back and side wired. Assembled in USA. | Black | 8200BKL | 8300BKL |
| | Brown | 8200L | 8300L |
| | Gray | 8200GYL | 8300GYL |
| | Ivory | 8200IVL | 8300IVL |
| | Light Almond | 8200LAL | 8300LALM |
| | Red | 8200REDL | 8300REDL |
| | White | 8200WL | 8300WL |
| Hospital grade, Tamper-Resistant, with Power Indicating LED, smooth nylon face, back and side wired. Assembled in USA. | Black | 8200BKLTRA | 8300BKLTRA |
| | Brown | 8200LTRA | 8300LTRA |
| | Gray | 8200GYLTRA | 8300GYLTRA |
| | Ivory | 8200IVLTRA | 8300IVLTRA |
| | Light Almond | 8200LALTRA | 8300LALTRA |
| | Red | 8200REDLTRA | 8300REDLTRA |
| | White | 8200WLTRA | 8300WLTRA |

Style Line® Decorator

| | | | |
|---|--------------|--------------------|--------------------|
| Hospital grade, Style Line® decorator, flush, nylon face, back and side wired. Assembled in USA. | Black | 2172BK | 2182BK |
| | Brown | 2172 | 2182 |
| | Gray | 2172GY | 2182GY |
| | Ivory | 2172IV | 2182IV |
| | Light Almond | 2172LA | 2182LA |
| | Red | 2172RED | 2182RED |
| | White | 2172W | 2182W |
| Hospital grade, Tamper-Resistant, Style Line® decorator, flush, nylon face, back and side wired. Assembled in USA. | Black | 2172BKTRA | 2182BKTRA |
| | Brown | 2172TRA | 2182TRA |
| | Gray | 2172GYTRA | 2182GYTRA |
| | Ivory | 2172IVTRA | 2182IVTRA |
| | Light Almond | 2172LATRA | 2182LATRA |
| | Red | 2172REDTRA | 2182REDTRA |
| | White | 2172WTRA | 2182WTRA |
| Hospital grade, with Power Indicating LED, Style Line® decorator, flush, nylon face, back and side wired. Assembled in USA. | Black | 2172BKL | 2182BKL |
| | Brown | 2172L | 2182L |
| | Gray | 2172GYL | 2182GYL |
| | Ivory | 2172IVL | 2182IVL |
| | Light Almond | 2172LAL | 2182LAL |
| | Red | 2172REDL | 2182REDL |
| | White | 2172WL | 2182WL |
| Hospital grade, Tamper-Resistant, with Power Indicating LED, Style Line® decorator, flush, nylon face, back and side wired. Assembled in USA. | Black | 2172BKLTRA | 2182BKLTRA |
| | Brown | 2172LTRA | 2182LTRA |
| | Gray | 2172GYLTRA | 2182GYLTRA |
| | Ivory | 2172IVLTRA | 2182IVLTRA |
| | Light Almond | 2172LALTRA | 2182LALTRA |
| | Red | 2172REDLTRA | 2182REDLTRA |
| | White | 2172WLTRA | 2182WLTRA |

Note: See pages A-47 and A-48 for accessories.

See page Tech-10 for Tamper-Resistant and LED Power Indicators descriptions.

See section O for wallplates.

Straight Blade Devices



15 and 20 Ampere, 125 and 250 Volts

Hubbell-PRO Heavy Duty Specification Grade Receptacles



15A 125V
NEMA 5-15R
UL CSA
0.5 HP



20A 125V
NEMA 5-20R
UL CSA
1 HP

| Duplex | Color | Catalog Number | Catalog Number |
|--|--------------|----------------|----------------|
| Smooth nylon face, duplex, back and side wired. | Almond | 5252AAL | 5352AAL |
| | Black | 5252ABLK | 5352ABLK |
| | Brown | 5252AB | 5352AB |
| | Gray | 5252AG | 5352AG |
| | Ivory | 5252AI | 5352AI |
| | Light Almond | 5252ALA | 5352ALA |
| | Office White | 5252AOW | 5352AOW |
| | Red | 5252AR | 5352AR |
| | White | 5252AW | 5352AW |
| Isolated ground ^A , smooth face, duplex, back and side wired. | Almond | IG5252AL | IG5352AL |
| | Gray | IG5252GY | IG5352GY |
| | Ivory | IG5252I | IG5352I |
| | Light Almond | IG5252LA | IG5352LA |
| | Orange | IG5252 | IG5352 |
| Isolated ground ^A , Tamper-Resistant, smooth face, duplex, back and side wired. | Ivory | IG5252ITR | IG5352ITR |
| | Orange | IG5252TR | IG5352TR |
| | White | IG5252WTR | IG5352WTR |
| Finder groove nylon face, duplex, back and side wired. | Almond | 5262AL | 5362AL |
| | Black | 5262BLK | 5362BLK |
| | Blue | - | 5362BL |
| | Brown | 5262B | 5362B |
| | Gray | 5262G | 5362G |
| | Ivory | 5262I | 5362I |
| | Light Almond | 5262LA | 5362LA |
| | Office White | 5262OW | 5362OW |
| | Red | 5262R | 5362R |
| | White | 5262W | 5362W |
| Weather Resistant, finder groove nylon face, duplex, back and side wired. | Black | 5262BKWR | 5362BKWR |
| | Brown | 5262WR | 5362WR |
| | Gray | 5262GYWR | 5362GYWR |
| | Ivory | 5262IWR | 5362IWR |
| | White | 5262WWR | 5362WWR |
| Isolated ground ^A , finder groove face, duplex, back and side wired. | Black | CR5252IGBK | CR5352IGBK |
| | Blue | - | CR5352IGBL |
| | Gray | CR5252IGGY | CR5352IGGY |
| | Ivory | CR5252IGI | CR5352IGI |
| | Orange | CR5252IG | CR5352IG |
| | Office White | CR5252IGOW | CR5352IGOW |
| White | CR5252IGW | CR5352IGW | |

Note: ^ASee section N for additional information on isolated ground devices.
See page A-47 for accessories and section O for wallplates.
See page Tech-10 for Tamper and Weather Resistant descriptions.
Horsepower ratings listed above are AC only.




15A 250V
NEMA 6-15R
UL CSA
1.5 HP




20A 250V
NEMA 6-20R
UL CSA
2 HP

Hubbell-PRO Heavy Duty Specification Grade Receptacles


| Duplex | Color | Catalog Number | Catalog Number |
|---|--------------|----------------|----------------|
| Smooth nylon face, duplex, back and side wired. | Almond | 5662AL | 5462AL |
| | Black | 5662BK | 5462BK |
| | Blue | 5662BL | 5462BL |
| | Brown | 5662B | 5462B |
| | Gray | 5662GY | 5462GY |
| | Ivory | 5662IV | 5462IV |
| | Light Almond | 5662LA | 5462LA |
| | Red | 5662R | 5462R |
| | White | 5662WHI | 5462WHI |




5252AI




IG5352



5262B



5362IWR



CR5252IG

Dimensions in Inches (mm)







15 and 20 Ampere, 125 Volts



15A 125V
NEMA 5-15R
UL CSA
0.5 HP



20A 125V
NEMA 5-20R
UL CSA
1 HP

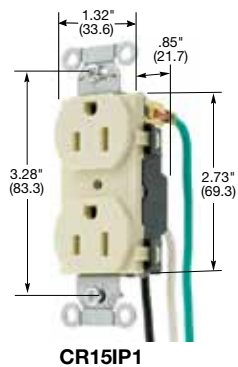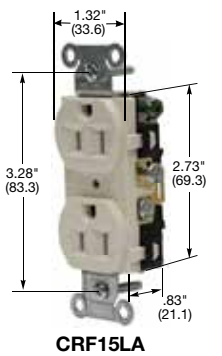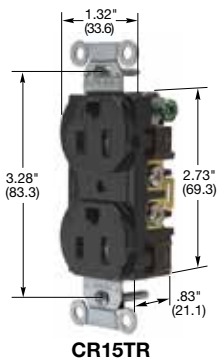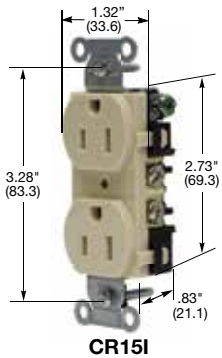

Commercial Specification Grade Receptacles

Duplex

| Description | Color | Catalog Number | |
|---|-----------------|--------------------|--------------------|
| Smooth nylon face, duplex, side wired only. | Almond | CR15AL | CR20AL |
| | Black | CR15BLK | CR20BLK |
| | Brown | CR15 | CR20 |
| | Gray | CR15GRY | CR20GRY |
| | Ivory | CR15I | CR20I |
| | Light Almond | CR15LA | CR20LA |
| | Office White | CR15OW | CR20OW |
| White | CR15WHI | CR20WHI | |
| Tamper-Resistant*, smooth nylon face, duplex, side wired only. | Almond | CR15ALTR | CR20ALTR |
| | Black | CR15BLKTR | CR20BLKTR |
| | Brown | CR15TR | CR20TR |
| | Gray | CR15GRYTR | CR20GRYTR |
| | Ivory | CR15ITR | CR20ITR |
| | Light Almond | CR15LATR | CR20LATR |
| | White | CR15WHITR | CR20WHITR |
| Finder groove, nylon face, duplex, side wired only. | Almond | CRF15AL | CRF20AL |
| | Black | - | CRF20BLK |
| | Brown | CRF15 | CRF20 |
| | Gray | CRF15GRY | CRF20GRY |
| | Ivory | CRF15I | CRF20I |
| | Light Almond | CRF15LA | CRF20LA |
| | Office White | CRF15OW | CRF20OW |
| White | CRF15WHI | CRF20WHI | |
| Pre-wired receptacles, smooth nylon face, duplex, side wired only, self-grounding, 8" solid wire leads. | Black | CR15BLKP1 | CR20BLKP1 |
| | Brown | CR15P1 | CR20P1 |
| | Gray | CR15GRYP1 | CR20GRYP1 |
| | Ivory | CR15IP1 | CR20IP1 |
| | Light Almond | CR15LAP1 | CR20LAP1 |
| | White | CR15WHIP1 | CR20WHIP1 |
| Pre-wired receptacles, smooth nylon face, duplex, side wired only, self-grounding, 8" stranded wire leads. | Black | CR15BLKP2 | CR20BLKP2 |
| | Brown | CR15P2 | CR20P2 |
| | Gray | CR15GRYP2 | CR20GRYP2 |
| | Ivory | CR15IP2 | CR20IP2 |
| | Light Almond | CR15LAP2 | CR20LAP2 |
| | White | CR15WHIP2 | CR20WHIP2 |
| Pre-wired receptacles, Tamper-Resistant*, smooth nylon face, duplex, side wired only, self-grounding, 8" solid wire leads. | Black | CR15BLKTRP1 | CR20BLKTRP1 |
| | Brown | CR15TRP1 | CR20TRP1 |
| | Gray | CR15GRYTRP1 | CR20GRYTRP1 |
| | Ivory | CR15ITRP1 | CR20ITRP1 |
| | Light Almond | CR15LATRP1 | CR20LATRP1 |
| | White | CR15WHITRP1 | CR20WHITRP1 |
| Pre-wired receptacles, Tamper-Resistant*, smooth nylon face, duplex, side wired only, self-grounding, 8" stranded wire leads. | Black | CR15BLKTRP2 | CR20BLKTRP2 |
| | Brown | CR15TRP2 | CR20TRP2 |
| | Gray | CR15GRYTRP2 | CR20GRYTRP2 |
| | Ivory | CR15ITRP2 | CR20ITRP2 |
| | Light Almond | CR15LATRP2 | CR20LATRP2 |
| | White | CR15WHITRP2 | CR20WHITRP2 |

Note: *Tamper-resistant devices are not Fed. Spec. Listed.
See page A-47 for accessories.
See page Tech-10 for Tamper-Resistant descriptions.
See section O for wallplates.

Dimensions in Inches (mm)

Straight Blade Devices



15 and 20 Ampere, 125 Volts



15A 125V
NEMA 5-15R
UL CSA
0.5 HP




20A 125V
NEMA 5-20R
UL CSA
1 HP


Commercial Specification Grade Receptacles

Duplex


| Description | Color | Catalog Number | | |
|--|--|--------------------|--------------------|------------------|
| Smooth nylon face, duplex, back and side wired. | Almond | BR15AL | BR20AL | |
| | Black | BR15BLK | BR20BLK | |
| | Blue | BR15BL | BR20BL | |
| | Brown | BR15 | BR20 | |
| | Gray | BR15GRY | BR20GRY | |
| | Ivory | BR15I | BR20I | |
| | Light Almond | BR15LA | BR20LA | |
| | Office White | BR15OW | BR20OW | |
| | Red | BR15R | BR20R | |
| | White | BR15WHI | BR20WHI | |
| | Tamper-Resistant*, smooth nylon face, duplex, back and side wired. | Almond | BR15ALTR | BR20ALTR |
| Black | | BR15BLKTR | BR20BLKTR | |
| Blue | | BR15BLTR | BR20BLTR | |
| Brown | | BR15TR | BR20TR | |
| Gray | | BR15GRYTR | BR20GRYTR | |
| Ivory | | BR15ITR | BR20ITR | |
| Light Almond | | BR15LATR | BR20LATR | |
| Red | | BR15RTR | BR20RTR | |
| White | | BR15WHITR | BR20WHITR | |
| Weather Resistant, smooth nylon face, duplex, back and side wired. | | Black | BR15BLKWR | BR20BLKWR |
| | | Brown | BR15WR | BR20WR |
| | Gray | BR15GRYWR | BR20GRYWR | |
| | Ivory | BR15IWR | BR20IWR | |
| | Light Almond | BR15LAWR | BR20LAWR | |
| | White | BR15WHIWR | BR20WHIWR | |
| Weather and Tamper-Resistant*, smooth nylon face, duplex, back and side wired. | Black | BR15BLKWRTR | BR20BLKWRTR | |
| | Brown | BR15WRTR | BR20WRTR | |
| | Gray | BR15GRYWRTR | BR20GRYWRTR | |
| | Ivory | BR15IWRTR | BR20IWRTR | |
| | Light Almond | BR15LAWRTR | BR20LAWRTR | |
| | White | BR15WHIWRTR | BR20WHIWRTR | |
| Isolated ground ^A , smooth nylon face, duplex, side wired only. | Almond | IG15CRAL | IG20CRAL | |
| | Gray | IG15CRGRY | IG20CRGRY | |
| | Ivory | IG15CRI | IG20CRI | |
| | Light Almond | IG15CRLA | IG20CRLA | |
| | Orange | IG15CR | IG20CR | |
| | White | IG15CRWHI | IG20CRWHI | |
| Isolated ground ^A , Style Line [®] decorator*, smooth nylon face, duplex, back and side wired. | Almond | IG15DRAL | IG20DRAL | |
| | Gray | IG15DRGRY | IG20DRGRY | |
| | Ivory | IG15DRI | IG20DRI | |
| | Light Almond | IG15DRLA | IG20DRLA | |
| | Orange | IG15DR | IG20DR | |
| | White | - | IG20DRWHI | |

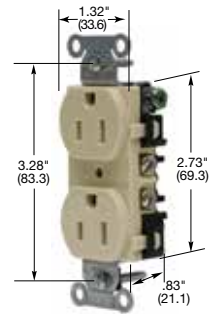


BR15I

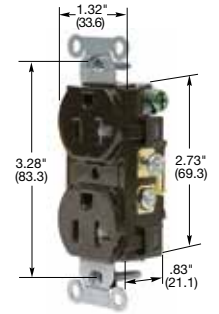


BR20TR

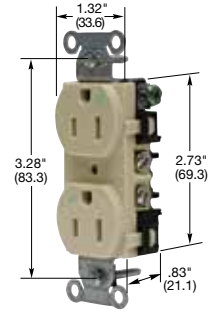

BR15IWR



BR20WRTR

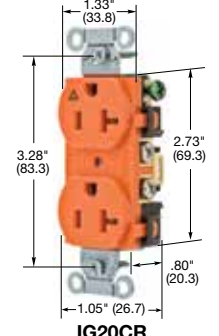

IG20CR

Note: ^ASee section N for additional information on isolated ground devices.
*Tamper-resistant and IG decorator devices are not Fed. Spec. Listed.
See page A-47 for accessories.
See page Tech-10 for Tamper and Weather Resistant descriptions.
See section O for wallplates.

Dimensions in Inches (mm)


15 and 20 Ampere, 125 Volts




15A 125V
NEMA 5-15R
UL CSA
0.5 HP




20A 125V
NEMA 5-20R
UL CSA
1 HP




DR15GRY




DR20ITR



DR20GRYWRTR



DR20WHIP2



DR15NLIV

Dimensions in Inches (mm)

Commercial Specification Grade Receptacles

Style Line® Decorator

| Description | Color | Catalog Number | | |
|--|---|--------------------|--------------------|--------------------|
| Smooth nylon face, Style Line® decorator duplex, back and side wired. | Almond | DR15AL | DR20AL | |
| | Black | DR15BLK | DR20BLK | |
| | Brown | DR15 | DR20 | |
| | Gray | DR15GRY | DR20GRY | |
| | Ivory | DR15I | DR20I | |
| | Light Almond | DR15LA | DR20LA | |
| | Red | DR15R | DR20R | |
| | White | DR15WHI | DR20WHI | |
| Tamper-Resistant*, Style Line® decorator duplex, smooth nylon face, back and side wired. | Almond | DR15ALTR | DR20ALTR | |
| | Black | DR15BLKTR | DR20BLKTR | |
| | Brown | DR15TR | DR20TR | |
| | Gray | DR15GRYTR | DR20GRYTR | |
| | Ivory | DR15ITR | DR20ITR | |
| | Light Almond | DR15LATR | DR20LATR | |
| | White | DR15WHITR | DR20WHITR | |
| | Weather and Tamper-Resistant*, Style Line® decorator duplex, smooth nylon face, back and side wired. | Black | DR15BLKWRTR | DR20BLKWRTR |
| Brown | | DR15WRTR | DR20WRTR | |
| Gray | | DR15GRYWRTR | DR20GRYWRTR | |
| Ivory | | DR15IWRTR | DR20IWRTR | |
| | Light Almond | DR15LAWRTR | DR20LAWRTR | |
| | White | DR15WHIWRTR | DR20WHIWRTR | |
| | Pre-wired receptacles, Style Line® decorator duplex, smooth nylon face, back and side wired, self-grounding, 8" solid wire leads. | Black | DR15BLKP1 | DR20BLKP1 |
| | | Brown | DR15P1 | DR20P1 |
| Gray | | DR15GRYP1 | DR20GRYP1 | |
| Ivory | | DR15IP1 | DR20IP1 | |
| Light Almond | | DR15LAP1 | DR20LAP1 | |
| | White | DR15WHIP1 | DR20WHIP1 | |
| | Pre-wired receptacles, Style Line® decorator duplex, smooth nylon face, back and side wired, self-grounding, 8" stranded wire leads. | Black | DR15BLKP2 | DR20BLKP2 |
| | | Brown | DR15P2 | DR20P2 |
| | | Gray | DR15GRYP2 | DR20GRYP2 |
| | | Ivory | DR15IP2 | DR20IP2 |
| Light Almond | | DR15LAP2 | DR20LAP2 | |
| | White | DR15WHIP2 | DR20WHIP2 | |
| | Pre-wired receptacles, Tamper-Resistant*, Style Line® decorator duplex, smooth nylon face, back and side wired, self-grounding, 8" solid wire leads. | Black | DR15BLKTRP1 | DR20BLKTRP1 |
| | | Brown | DR15TRP1 | DR20TRP1 |
| | | Gray | DR15GRYTRP1 | DR20GRYTRP1 |
| | | Ivory | DR15ITRP1 | DR20ITRP1 |
| Light Almond | | DR15LATRP1 | DR20LATRP1 | |
| | White | DR15WHITRP1 | DR20WHITRP1 | |
| | Pre-wired receptacles, Tamper-Resistant*, Style Line® decorator duplex, smooth nylon face, back and side wired, self-grounding, 8" stranded wire leads. | Black | DR15BLKTRP2 | DR20BLKTRP2 |
| | | Brown | DR15TRP2 | DR20TRP2 |
| | | Gray | DR15GRYTRP2 | DR20GRYTRP2 |
| | | Ivory | DR15ITRP2 | DR20ITRP2 |
| Light Almond | | DR15LATRP2 | DR20LATRP2 | |
| | White | DR15WHITRP2 | DR20WHITRP2 | |
| | Nightlight receptacle, two nightlight sources for a total of 0.5 Lumens, Tamper-Resistant* shutters complies with NEC article 406.12, back and side wired | Ivory | DR15NLIV | - |
| | | Light Almond | DR15NLLA | - |
| | | White | DR15NLWH | - |

Note: *Tamper-resistant devices are not Fed. Spec. Listed.

See page A-47 for accessories.

See page Tech-10 for Tamper and Weather Resistant descriptions.

See section O for wallplates.

15 and 20 Ampere, 125 Volts

Hospital Grade ● USB Charger Type-C, Type A&C and Type A



15A 125V
NEMA 5-15R
UL CSA
0.5 HP



20A 125V
NEMA 5-20R
UL CSA
1 HP



| Description | Color | Catalog Number | |
|---|-------------------|---------------------|---------------------|
| Hospital Grade USB Charger Outlet: two Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles. | Black | USB8200C5BK | USB8300C5BK |
| | Brown | USB8200C5 | USB8300C5 |
| | Gray | USB8200C5GY | USB8300C5GY |
| | Ivory | USB8200C5I | USB8300C5I |
| | Light Almond | USB8200C5LA | USB8300C5LA |
| | Red | USB8200C5R | USB8300C5R |
| Hospital Grade USB Charger Outlet: one Type A and one Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles. | Black | USB8200AC5BK | USB8300AC5BK |
| | Brown | USB8200AC5 | USB8300AC5 |
| | Gray | USB8200AC5GY | USB8300AC5GY |
| | Ivory | USB8200AC5I | USB8300AC5I |
| | Light Almond | USB8200AC5LA | USB8300AC5LA |
| | Red | USB8200AC5R | USB8300AC5R |
| Hospital Grade USB Charger Outlet: two Type A port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles. | Black | USB8200A5BK | USB8300A5BK |
| | Brown | USB8200A5 | USB8300A5 |
| | Gray | USB8200A5GY | USB8300A5GY |
| | Ivory | USB8200A5I | USB8300A5I |
| | Light Almond | USB8200A5LA | USB8300A5LA |
| | Red | USB8200A5R | USB8300A5R |
| White | USB8200A5W | USB8300A5W | |

Commercial Grade USB Charger Type-C, Type A&C and Type A



| Description | Color | Catalog Number | |
|---|--------------|-------------------|-------------------|
| Commercial Grade USB Charger Outlet: two Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles. | Black | USB15C5BK | USB20C5BK |
| | Brown | USB15C5 | USB20C5 |
| | Gray | USB15C5GY | USB20C5GY |
| | Ivory | USB15C5I | USB20C5I |
| | Light Almond | USB15C5LA | USB20C5LA |
| | White | USB15C5W | USB20C5W |
| Commercial Grade USB Charger Outlet: one Type A and one Type-C port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles. | Black | USB15AC5BK | USB20AC5BK |
| | Brown | USB15AC5 | USB20AC5 |
| | Gray | USB15AC5GY | USB20AC5GY |
| | Ivory | USB15AC5I | USB20AC5I |
| | Light Almond | USB15AC5LA | USB20AC5LA |
| | White | USB15AC5W | USB20AC5W |
| Commercial Grade USB Charger Outlet: two Type A port configurations, high power 5 Amp, 5 Volt USB output, Tamper-Resistant duplex receptacle, USB ports rated 10,000 cycles. | Black | USB15A5BK | USB20A5BK |
| | Brown | USB15A5 | USB20A5 |
| | Gray | USB15A5GY | USB20A5GY |
| | Ivory | USB15A5I | USB20A5I |
| | Light Almond | USB15A5LA | USB20A5LA |
| | White | USB15A5W | USB20A5W |

Note: See page Tech-10 for Tamper-Resistant description.
See section O for wallplates.


USB Charger 4 Port Outlet




| Description | Color | Catalog Number |
|---|------------|----------------|
| USB Charger 4 Port Outlet, Four USB Type 2.0 Ports 5 Amp, 5 Volt DC decorator. | Black | USB4BK |
| | Brown | USB4 |
| | Gray | USB4GY |
| | Ivory | USB4I |
| | Lt. Almond | USB4LA |
| | White | USB4W |

USB Charger 2 Port Outlet


| Description | Color | Catalog Number |
|--|------------|----------------|
| USB Charger 2 Port Outlet, Shallow Profile, Two USB Type 2.0 Ports 3 Amp, 5 Volt DC decorator. | Black | USB2BK |
| | Brown | USB2 |
| | Gray | USB2GY |
| | Ivory | USB2I |
| | Lt. Almond | USB2LA |
| | White | USB2W |



USB8300C5W




USB15AC5GY



USB20A5I



USB4W




USB2W


Dimensions in Inches (mm)




15 and 20 Ampere, 125 Volts




HBL415HI



HBL415I



HBL4API

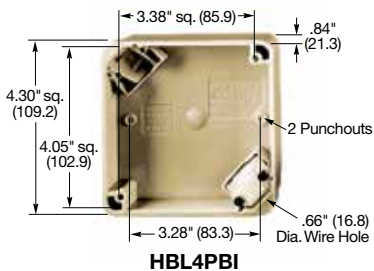

HBL4PBI

4-PLEX® Hospital Grade ● Receptacles



15A 125V
NEMA 5-15R
 UL CSA
 0.5 HP



20A 125V
NEMA 5-20R
 UL CSA
 1 HP

| Description | Color | Catalog Number | |
|---|-------|-----------------|------------------|
| 4 outlet high impact resistant Polycarbonate construction. Mount to 4 in. square box. | Brown | HBL415H | HBL420H |
| | Gray | - | HBL420HGY |
| | Ivory | HBL415HI | HBL420HI |
| | Red | HBL415HR | HBL420HR |
| | White | HBL415HW | HBL420HW |

4-PLEX® Receptacles Over Size Robertson/Slotted Head Terminal Screws



15A 125V
NEMA 5-15R
 UL CSA
 0.5 HP



20A 125V
NEMA 5-20R
 UL CSA
 1 HP

| Description | Color | Catalog Number | |
|--------------------------------|--------|-----------------|-----------------|
| Specification grade. | Black | HBL415BK | HBL420BK |
| | Brown | HBL415 | HBL420 |
| | Gray | HBL415GY | HBL420GY |
| | Ivory | HBL415I | HBL420I |
| | White | HBL415W | HBL420W |
| Isolated ground ^A . | Orange | IG415 | IG420 |
| Surge suppression. | Blue | HBL415S | HBL420S |
| | Ivory | HBL415IS | HBL420IS |

Note: ^ASee section N for additional information on isolated ground devices.

Horsepower ratings are AC only.

4-PLEX Receptacles are of a non-metallic design. Product is supplied with isolated ground symbol stickers. Apply if needed. Mounts to 4-inch square box.

4-PLEX® Accessories

| Description | Color | Catalog Number |
|---|--------|-----------------|
| 4-PLEX adapter plates for 1- and 2-gang, device boxes. | Blue | HBL4APBL |
| | Brown | HBL4AP |
| | Gray | HBL4APGY |
| | Ivory | HBL4API |
| | Orange | HBL4APO |
| | Red | HBL4APR |
| | White | HBL4APW |
| 4-PLEX Portable Box, 4 in. (101.6) square box with cord grip. Accepts up to .66 in. (16.8) diameter cord. | Black | HBL4PBBK |
| | Brown | HBL4PB |
| | Ivory | HBL4PBI |

Note: 4-PLEX Box is not UL listed or CSA Certified. UL listing does not apply when 4-PLEX Receptacle is used with 4-PLEX Box in extension cord application. Supplied with one cord clamp.



Products at a Glance



Hospital Grade Plugs and Connectors

- Hospital Grade with green dot symbol
- Powerful offsetting cord grips clamp on individual conductors
- Transparent angled wiring entrance holes permit "straight in" conductor insertion
- Valise® devices have unique patented clamp type terminals, provide a superior electrical connection



Heavy Duty Insulgrip® Plugs and Connectors

- Beveled housing prevents snagging
- Integral VARI-SIZE® insert adjusts to a wide range of cord sizes: .23 to .72 inch (5.8 to 18.3).
- Individually molded face for each blade configuration keeps debris out of plug interior
- Ribbed nylon housing is impact and chemical resistant



Watertight and Dust Tight Devices

- Multiple "U-Drive" fast lead body assembly screws
- Color coded Kellems GOTCHA® rings provide increased cord retention
- Powerful nylon cord grip prevents strain on terminals
- Dust and moisture seal keeps out liquids, metal filings and other foreign materials
- Closure plug seals connector body when disconnected from plug



Features and Benefits

Insulgrip® 15 and 20 Ampere Plugs and Connector Bodies

Insulgrip products are synonymous with Hubbell's ongoing commitment to discovering ways to make products safer and last longer.

By encasing wiring devices in tough nylon housings, Insulgrip devices ensure high impact, heat, and chemical resistance while insulating current-carrying components from the user for maximum safety.

- The Insulgrip's cord gripping design clamps conductors, not just the cable jacket, making it the industry's most powerful cord grip with superior strain relief.
- Each Insulgrip device is manufactured with roomy, separate wiring chambers to insulate conductors and an individually molded face to keep out dust and debris that can cause contamination over time.



HBL5266C



HBL5269C



Housing Design

- Ribbed nylon housing provides a secure grip that's impact and chemical resistant
- Beveled housing prevents snagging when dragged across uneven surfaces
- Individually molded face for each blade configuration keeps debris out of plug interior



Internal Design

- Powerful cord grips clamp on individual conductors and outer cord jacket to prevent strain on terminations
- Individual wiring terminals are completely enclosed in their own separate chambers



Cord Range

- Integral VARI-SIZE® insert adjusts to a wide range of cord sizes: .230"-.720" (5.8-18.3)
- VARI-SIZE® pointer set to "smaller than gauge" position. Cord diameter range is .230"-.360" (5.8-9.0). Accepts slotted and Phillips head drivers



Assembly

- Multiple drive screw heads provide screwdriver versatility. Pocketed recess for cord grip screws deters slippage of the screwdriver



Identification

- Catalog number is visible on the device while in use for easy identification



Visual Verification

- Transparent angled wiring entrance holes permit "straight in" conductor insertion and quick visual verification for terminations



Features and Benefits

Valise® Plugs and Connector Bodies

Hubbell Valise plugs go together in seconds but stay together securely for reliable long-term operation. Eight loadbearing, locking lugs in the impact- and crush-resistant nylon body assure a positive grip. Devices feature patented “wire bundling” terminals that are easy to wire and provide positive, reliable terminations



HBL5965VY



Housing Design

- Removable cord inserts to accommodate a wide range of cord sizes, .220"-.660" (5.6-16.8)
- Powerful cord grips prevent conductor slippage and strain on wiring terminals
- Eight specially designed load bearing locking lugs insure a positive fit as the blade holder and sides are closed



Internal Design

- Unique patented clamp-type terminals provide a superior electrical connection by “bundling” the conductor strands when clamps are tightened
- Nylon webs are provided to make wiring quick and easy during assembly
- Two captive multiple drive assembly screws

Elastogrip® High Visibility Yellow Plugs and Connectors

Hubbell straight blade devices, female connector body, Elastogrip watertight, industrial/commercial grade, 2-pole 3-wire grounding, 15A 125V, NEMA 5-15R, yellow, single pack. Tough nylon body provides superior resistance in harsh abusive environments. IP55 suitability when closure plug inserted or when installed and used properly with mating watertight plug.



HBL15W47



Watertight Plug Housing Design

- Thermoplastic elastomer housing resists weathering caused by ultraviolet rays and ozone better than rubber; also oil and chemical resistant
- Nylon compression nut keeps water and dust from getting into the body around the cord



Watertight Plug Internal Design

- Three separate transparent wiring chambers allow for visual inspection
- Multiple drive “U-Drive” fast lead body assembly screws
- Neoprene bushing keeps water and dust out
- Color coded Kellems GOTCHA® rings provide increased cord retention



Watertight Connector Housing Design

- Closure plug seals connector body when disconnected from plug
- Integral weatherproofing shroud seals connection between plug and connector



Watertight Connector Internal Design

- Pretensioned “bypass” design female contacts for abuse resistance and reliability
- Nylon compression nut keeps water and dust from getting into the body around the cord




Dust Tight Plug Housing Design

- Thermoplastic elastomer housing
- Powerful nylon cord grip prevents strain on terminals




Dust Tight Plug Internal Design

- Multiple drive “U-Drive” fast lead body assembly screws
- Dust and moisture seal keeps out liquids, metal filings and other foreign materials



HBL8215C

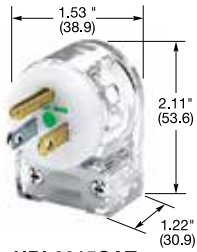


HBL8215CAT



HBL8115V




HBL8219C



HBL8219CT



HBL8119V

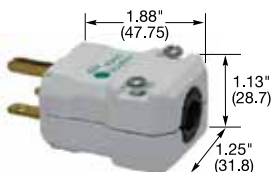

HBL8666V

IP20
SUITABILITY



15A 125V
NEMA 5-15P
UL CSA



20A 125V
NEMA 5-20P
UL CSA

Hospital Grade Plugs

Insulgrip®

| Description | Cord Diameter | Catalog Number | |
|---|------------------------|--------------------|--------------------|
| Black and white nylon. | .230"-.720" (5.8-18.3) | HBL8215C | HBL8315C |
| Transparent housing. | .230"-.720" (5.8-18.3) | HBL8215CT | HBL8315CT |
| 8 position angle plug, transparent housing. | .250"-.655" (6.4-16.6) | HBL8215CAT* | HBL8315CAT* |

Valise®

| Description | Cord Diameter | Catalog Number | |
|---------------------------------------|------------------------|------------------|-----------------|
| White nylon. | .300"-.660" (7.6-16.8) | HBL8115V | HBL8364V |
| Insulation displacement, white nylon. | .300"-.360" (7.6-9.1) | HBL8013V* | - |

IP20
SUITABILITY



15A 125V
NEMA 5-15R
UL CSA
0.5 HP



20A 125V
NEMA 5-20R
UL CSA
1 HP

Hospital Grade Connector Bodies

Insulgrip®

| Description | Cord Diameter | Catalog Number | |
|------------------------|------------------------|------------------|------------------|
| Black and white nylon. | .230"-.720" (5.8-18.3) | HBL8219C | HBL8319C |
| Transparent housing. | .230"-.720" (5.8-18.3) | HBL8219CT | HBL8319CT |

Valise®

| Description | Cord Diameter | Catalog Number | |
|--------------|------------------------|-----------------|---|
| White nylon. | .300"-.660" (7.6-16.8) | HBL8119V | - |

Note: *Not Fed. Spec. Listed.
See page A-48 for accessories.

IP20
SUITABILITY



15A 250V
NEMA 6-15P
UL CSA
1.5 HP



20A 250V
NEMA 6-20P
UL CSA
2 HP

Hospital Grade Plugs

Valise®

| Description | Cord Diameter | Catalog Number | |
|---------------------------|------------------------|-----------------|-----------------|
| Valise plug, white nylon. | .300"-.660" (7.6-16.8) | HBL8666V | HBL8464V |

Note: HP ratings listed above are based on 208 to 240V AC only.



15A 250V
NEMA 6-15R
UL CSA
1.5 HP



20A 250V
NEMA 6-20R
UL CSA
2 HP

Hospital Grade Connector Bodies

Valise®

| Description | Cord Diameter | Catalog Number | |
|--------------|------------------------|----------------|-----------------|
| White nylon. | .300"-.660" (7.6-16.8) | - | HBL8469V |

Dimensions in Inches (mm)



15A 125V
NEMA 5-15P
UL CSA




20A 125V
NEMA 5-20P
UL CSA

IP20
SUITABILITY

Plugs

Insulgrip®

| Description | Cord Diameter | Catalog Number | |
|--|---------------------------|--------------------|-------------------|
| Black and white nylon. | .230"-.720" (5.8-18.3) | HBL5266C | HBL5366C |
| Blue and white nylon. | .230"-.720" (5.8-18.3) | HBL5266CBL | - |
| Black nylon extra large cord clamp. | .360"-.720" (9.1-18.3) | HBL5266EBK | HBL5366EBK |
| Corrosion resistant yellow nylon. | .230"-.720" (5.8-18.3) | HBL52CM66C | HBL53CM66C |
| 8-position angle plug, black and white nylon. | .325"-.655" (8.3-16.6) | HBL5266CA | HBL5366CA |
| 8-position angle plug, transparent enclosure. | .325"-.655" (8.3-16.6) | HBL5266CAT | - |
| Anchor lock, black and white nylon. | .230"-.720" (5.8-18.3) | HBL5280C* | - |
| Anchor lock, corrosion resistant yellow nylon. | .230"-.720" (5.8-18.3) | HBL52CM80C* | - |
| Finger grip, black neoprene, combination screws. CSA only. | .31"-.43" (7.9-10.9) | HBL5921 | - |
| Fusible, black vinyl housing, slotted screws. CSA only. | .296"-.625" (7.5-15.9) | HBL5299 | - |




HBL5266C




HBL5266CA



HBL1447

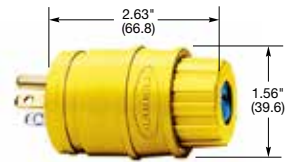

HBL14W47

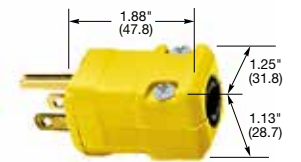

HBL5965VY


Elastogrip®

| Description | Cord Diameter | Catalog Number | |
|--|---------------------------|-------------------|-------------------|
| Yellow elastomer, dust tight. IP20 and IP55 SUITABILITY. | .300"-.655" (7.6-16.6) | HBL1447 | HBL1433 |
| Yellow elastomer, watertight. IP20 and IP55 SUITABILITY. | .300"-.655" (7.6-16.6) | HBL14W47** | HBL14W33** |
| Yellow elastomer, watertight. IP65, 66, 67 SUITABILITY. | .375"-.625" (9.5-15.9) | HBL14W47A | HBL14W33A |

IP20
SUITABILITY

Valise®

| Description | Cord Diameter | Catalog Number | |
|--|---------------------------|--------------------|-------------------|
| Yellow nylon. | .220"-.660" (5.6-16.8) | HBL5965VY | HBL5364VY |
| Black nylon. | .220"-.660" (5.6-16.8) | HBL5965VBLK | HBL5364VBK |
| Gray nylon. | .220"-.660" (5.6-16.8) | HBL5965VGY | - |
| Orange nylon, sold in bulk pack of 50. | .220"-.660" (5.6-16.8) | HBL515PVO | - |
| Insulation displacement terminals, black nylon. | .230"-.360" (5.8-9.1) | HBL5966VBLK | - |
| Insulation displacement terminals, yellow nylon. | .230"-.360" (5.8-9.1) | HBL5966VY | - |

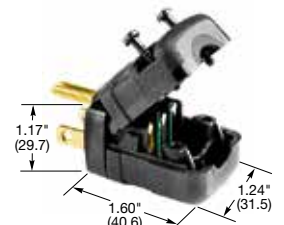

HBL5966VBLK


Note: *UL Component Listed only. Not for general use applications.

**Watertight plugs IP55 suitability when installed and used properly with mating Elastogrip watertight connector bodies.


Horsepower ratings listed are AC only.

See page A-48 for accessories.


Dimensions in Inches (mm)



HBL5269C

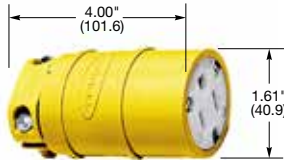

HBL1547

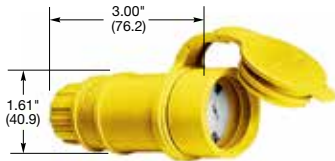

HBL15W47



HBL5969VY



HBL5963VY



Dimensions in Inches (mm)

IP20
SUITABILITY



15A 125V
NEMA 5-15R
UL CSA
0.5 HP



20A 125V
NEMA 5-20R
UL CSA
1 HP

Connector Bodies

Insulgrip®

| Description | Cord Diameter | Catalog Number | |
|-------------------------------------|---------------------------|-------------------|-------------------|
| Black and white nylon. | .230"-.720" (5.8-18.3) | HBL5269C | HBL5369C |
| Blue and white nylon. | .230"-.720" (5.8-18.3) | HBL5269CBL | - |
| Black nylon extra large cord clamp. | .360"-.720" (9.1-18.3) | HBL5269EBK | HBL5369EBK |
| Corrosion resistant yellow nylon. | .230"-.720" (5.8-18.3) | HBL52CM69C | HBL53CM69C |

Note: See page A-48 for accessories.

Elastogrip®

| Description | Cord Diameter | Catalog Number | |
|---|---------------------------|------------------|------------------|
| Yellow elastomer, dust tight. IP20 and IP55 SUITABILITY. | .300"-.655" (7.6-16.6) | HBL1547 | HBL1533 |
| Yellow elastomer, watertight. IP20 and IP55 SUITABILITY. | .300"-.655" (7.6-16.6) | HBL15W47* | HBL15W33* |
| Yellow elastomer, watertight. IP65, 66, 67 SUITABILITY. | .375"-.625" (9.5-15.9) | HBL15W47A | HBL15W33A |

IP20
SUITABILITY

Valise®

| Description | Cord Diameter | Catalog Number | |
|--|---------------------------|--------------------|-------------------|
| Yellow nylon. | .220"-.660" (5.6-16.8) | HBL5969VY | HBL5369VY |
| Black nylon. | .220"-.660" (5.6-16.8) | HBL5969VBLK | HBL5369VBK |
| Gray nylon. | .220"-.660" (5.6-16.8) | HBL5969VGY | - |
| Orange nylon, sold in bulk pack of 50. | .220"-.660" (5.6-16.8) | HBL515CVO | - |
| Insulation displacement terminals, black nylon. | .230"-.360" (5.8-9.1) | HBL5963VBK | - |
| Insulation displacement terminals, yellow nylon. | .230"-.360" (5.8-9.1) | HBL5963VY | - |

Note: *Watertight connectors IP55 suitability when closure plug inserted or when installed and used properly with mating Elastogrip watertight plug.
Connector bodies are not HP rated.
See page A-48 for accessories.

For quick visual identification of circuits or configurations.

Colored Cord Clamps*

| Description | Color | Catalog Number |
|--|--------|-----------------------|
| For use with 15A and 20A, 2 pole/3 wire, insulgrip plugs and connectors with cord diameter range of .230"-.720" (5.8-18.3) only. | Blue | HBLCORDCLAMPBL |
| | Green | HBLCORDCLAMPGN |
| | Orange | HBLCORDCLAMPOR |
| | Purple | HBLCORDCLAMPP |
| | Red | HBLCORDCLAMP R |
| | Yellow | HBLCORDCLAMPY |

Note: *Clamp only. Contains no screws. Order in increments of 10. Not UL Listed or CSA Certified.



15A 125V
NEMA 5-15P
UL CSA



20A 125V
NEMA 5-20P
UL CSA


Flanged Inlets

| Description | Catalog Number | |
|---|--------------------|-----------------|
| Nylon casing, back wired. | HBL5278C | HBL5378C |
| Weatherproof, gray, with lift cover and multiple drive screws. | HBL61CM64 | - |
| Weatherproof, black, with lift cover and boot, multiple drive screws. | HBL61CM64BK | - |
| Stainless steel flange, phenolic body, miniature style, for molded on connectors only, multiple drive screws. | HBL5240* | - |

Note: *Specially designed to accept "molded-on" connector bodies. Catalog number HBL5240 will not accept re-wireable size connector bodies listed in this catalog or molded connectors having a "rejection obstruction" as required by Underwriters Laboratories Inc. standard #817 cord sets and power supply cords" effective 7/1/81. See pages A-47 and A-48 for accessories.



HBL5278C

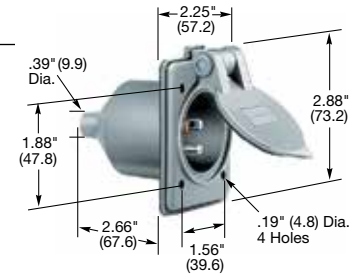

HBL61CM64



15A 125V
NEMA 5-15R
UL CSA
0.5 HP



20A 125V
NEMA 5-20R
UL CSA
1 HP


Flanged Receptacles

| Description | Catalog Number | |
|--|-----------------|--------------------|
| Nylon casing, back wired. | HBL5279C | HBL5379C |
| Stainless steel flange, phenolic body, covered terminals, multiple drive screws. | HBL5279 | - |
| Stainless steel flange, brown phenolic (mounting screws packed separately). | HBL5256 | - |
| Weatherproof, gray nylon, with lift cover and boot, multiple drive screws. | - | HBL61CM65** |


Note: **Not CSA Certified. See pages A-47 and A-48 for accessories.



HBL5279C

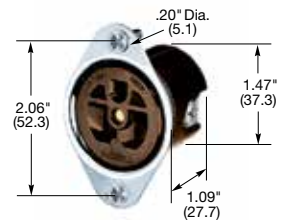





HBL5256



HBL61CM65

Dimensions in Inches (mm)



HBL5666C

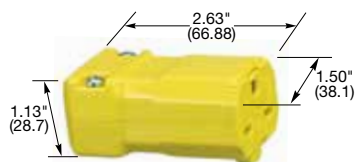HBL5669C

HBL5666CA

HBL5666VY

HBL5669VY

HBL5678C


Dimensions in Inches (mm)

Plugs

| Description | Cord Diameter | Catalog Number | |
|--|---------------------------|--------------------|--------------------|
| Insulgrip® Plug, black and white nylon. | .230"-.720" (5.8-18.3) | HBL5666C | HBL5466C |
| Insulgrip® Plug, corrosion resistant, yellow nylon. | .230"-.720" (5.8-18.3) | HBL566CM66C | HBL546CM66C |
| 8-Position Insulgrip® Angle Plug, black and white nylon. | .325"-.655" (8.3-16.6) | HBL5666CA | HBL5466CA |
| Valise® Plug, yellow nylon. | .220"-.660" (5.6-16.8) | HBL5666VY | HBL5464VY |



Connector Bodies

| Description | Cord Diameter | Catalog Number | |
|--|---------------------------|------------------|------------------|
| Insulgrip® Connector Body, black and white nylon, multiple drive screws. | .230"-.720" (5.8-18.3) | HBL5669C | HBL5469C |
| Valise® Connector Body, yellow nylon. | .220"-.660" (5.6-16.8) | HBL5669VY | HBL5469VY |



Note: See page A-48 for accessories.


Insulgrip® Flanged Inlets

| Description | Catalog Number | |
|---------------------------|-----------------|-----------------|
| Nylon casing, back wired. | HBL5678C | HBL5478C |

 Note: Flanged inlets are not HP rated.
See page A-48 for accessories.


Flanged Receptacles

| Description | Catalog Number | |
|---|-----------------|-----------------|
| Nylon casing, multiple drive screws. | HBL5679C | HBL5479C |
| Stainless steel flange, brown phenolic housing (mounting screws packaged separately). | HBL5656 | - |

 Note: Connector bodies are not HP rated.
See pages A-47 and A-48 for accessories.


For quick visual identification of circuits or configurations.

Colored Cord Clamps*

| Description | Color | Catalog Number |
|--|--------|-----------------------|
| For use with 15A and 20A, 2 pole/3 wire, insulgrip plugs and connectors with cord diameter range of .230"-.720" (5.8-18.3) only. | Blue | HBLCORDCLAMPBL |
| | Green | HBLCORDCLAMPGN |
| | Orange | HBLCORDCLAMPOR |
| | Purple | HBLCORDCLAMPPP |
| | Red | HBLCORDCLAMP R |
| | Yellow | HBLCORDCLAMPY |

Note: *Clamp only. Contains no screws. Order in increments of 10. Not UL Listed or CSA Certified.

Straight Blade Devices



15A, 125V, 2 Pole, 2 Wire Non-Grounding, Valise® Plugs

IP20
SUITABILITY




15A 125V
NEMA 1-15R
UL CSA
0.5 HP




15A 125V
NEMA 1-15P
UL CSA
0.5 HP

| Description | Cord Diameter | Catalog Number |
|------------------------------|--------------------------|----------------------|
| Yellow nylon, non-polarized. | .218"-.385" (5.5-9.8) | - HBL5865VY |
| Yellow nylon, polarized. | .218"-.385" (5.5-9.8) | - HBL5866VY |
| Black nylon, polarized. | Type 17/2 "SVT" cord | - HBL5867VBLK |

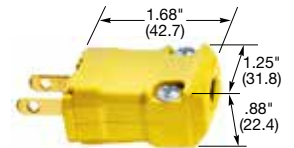


HBL5865VY

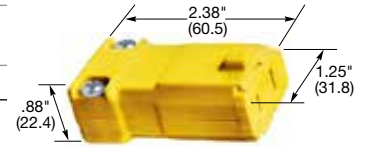

HBL5866VY

Valise® Connector Bodies

| Description | Cord Diameter | Catalog Number |
|---------------|--------------------------|--------------------|
| Yellow nylon. | .218"-.385" (5.5-9.8) | HBL5869VY - |



HBL5869VY



15A, 277V AC, 2 Pole, 3 Wire Grounding, Plugs



15A 277V AC
NEMA 7-15R
UL CSA
2 HP



15A 277V AC
NEMA 7-15P
UL CSA
2 HP

| Description | Cord Diameter | Catalog Number |
|-------------------------------|-------------------------|-------------------|
| Finger grip, black elastomer. | .31"-.43" (7.9-10.9) | - HBL5929* |



HBL5929

Receptacles and Connector Bodies

| Description | Cord Diameter | Catalog Number |
|---|---------------------------|------------------|
| Receptacle, flush duplex, brown, back and side wired. | - | HBL5302 - |
| Connector Body, phenolic and steel body. | .296"-.625" (7.5-15.9) | HBL5324 - |

Note: *Not UL Listed.
Horsepower ratings are AC only.
See pages A-47 and A-48 for accessories.



HBL5324



20A, 250V, 2 Pole, 2 Wire Non-Grounding, Valise® Plugs

IP20
SUITABILITY




20A 250V
NEMA 2-20R
UL Listed
2 HP



20A 250V
NEMA 2-20P
UL Listed
2 HP

| Description | Cord Diameter | Catalog Number |
|---------------|---------------------------|--------------------|
| Yellow nylon. | .220"-.660" (5.6-16.8) | - HBL9758VY |




HBL9758VY

Receptacle, Single


| Description | Catalog Number |
|-----------------|-------------------|
| Black phenolic. | HBL5552B - |

Note: Horsepower ratings are AC only and apply to plugs and receptacles only.
See pages A-47 and A-48 for accessories.



HBL5552B


Dimensions in Inches (mm)

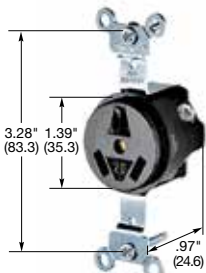


HBL6810




HBL9977C




HBL8410



HBL8411C

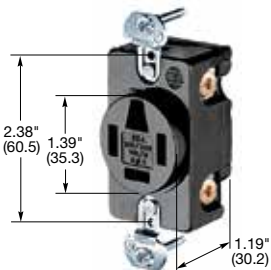

HBL7250



HBL7251C

Dimensions in Inches (mm)



20A, 125/250V, 3 Pole, 3 Wire Non-Grounding, Receptacles and Plugs

IP20
SUITABILITY



**20A 125V/250V
NEMA 10-20R**
UL Listed
2(1) HP



**20A 125V/250V
NEMA 10-20P**
UL Listed
2(1) HP

| Description | Cord Diameter | Catalog Number |
|-----------------------------|---------------------------|-----------------|
| Receptacle, black phenolic. | - | HBL6810 |
| Plug, Insulgrip®, nylon. | .385"-.780" (9.8-19.8) | HBL9977C |

Note: Horsepower ratings listed above are AC only.

Horsepower ratings not in parentheses are phase to phase (208 to 240V AC).

Those in parentheses are phase to neutral (120V AC).

See pages A-47 and A-48 for accessories.



20A, 125/250V, 3 Pole, 4 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY



**20A 125V/250V
NEMA 14-20R**
UL CSA
2(1) HP



**20A 125V/250V
NEMA 14-20P**
UL CSA
2(1) HP

| Description | Cord Diameter | Catalog Number |
|--|---------------------------|-----------------|
| Receptacle, black nylon body, back and side wired. | - | HBL8410 |
| Plug, nylon, angle 4-position. | .390"-.775" (9.9-19.7) | HBL8411C |

See pages A-47 and A-48 for accessories.



20A, 3Ø 250V AC, 3 Pole, 4 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY



**20A 3Ø 250V AC
NEMA 15-20R**
UL CSA
3 HP



**20A 3Ø 250V AC
NEMA 15-20P**
UL CSA
3 HP

| Description | Cord Diameter | Catalog Number |
|--|---------------------------|-----------------|
| Receptacle, black nylon body, back and side wired. | - | HBL8420 |
| Plug, nylon, angle 4-position. | .390"-.775" (9.9-19.7) | HBL8421C |

Note: Horsepower ratings listed above are AC only.

Horsepower ratings not in parentheses are phase to phase (208 to 240V AC).

Horsepower ratings in parentheses are phase to neutral (120V AC).

See pages A-47 and A-48 for accessories.



20A, 3ØY 120/208V AC, 4 Pole, 4 Wire Non-Grounding, Receptacles and Plugs

IP20
SUITABILITY



**20A 3ØY 120/208V AC
NEMA 18-20R**
UL Listed
2 HP



**20A 3ØY 120/208V AC
NEMA 18-20P**
UL Listed
2 HP

| Description | Cord Diameter | Catalog Number |
|---------------------------------|---------------------------|-----------------|
| Receptacle, black nylon body. | - | HBL7250 |
| Plug, nylon, angle, 4-position. | .390"-.775" (9.9-19.7) | HBL7251C |

Note: Horsepower ratings are phase to phase (208 to 240V AC).

Weatherproof boots for plugs not available.



See pages A-47 and A-48 for accessories.



Receptacle IEC 320 Compatible

| Description | Catalog Number |
|------------------------------------|-----------------|
| 20/16A 250V AC IEC straight blade. | H320R |
| For Ring Terminal connection. | H320RRT* |

Note: *Not UL Listed.





H320R



Connectora

IP20
SUITABILITY

| Description | Catalog Number |
|------------------------------------|----------------|
| 20/16A 250V AC IEC straight blade. | H320C |




H320C



Plug IEC 320 Compatible

IP20
SUITABILITY

| Description | Catalog Number |
|------------------------------------|----------------|
| 20/16A 250V AC IEC straight blade. | H320P |




H320P




Inlets

| Description | Catalog Number |
|---|----------------|
| 20/16A 250V AC IEC straight blade. | H320B |
| 20/16A 250V AC IEC straight blade with retention clamp. | H320BL |



H320B

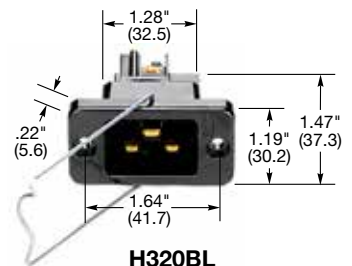

H320BL

Dimensions in Inches (mm)



UGRO20231



Acceptor® Hazardous Location Receptacles




15A 125V
NEMA 5-15R
UL CSA
0.5 HP



20A 125V
NEMA 5-20R
UL CSA
1 HP

| Description | Catalog Number |
|---|---|
| Explosion and dust ignition proof. Class I, Div. 1 & 2, Groups C, D Class II, Div. 1 & 2, Groups F, G Class III NEMA® 3, 7 B C D, 9 F G | - UGRO20231 - UGRA20231* |

*Note: *UGRA version includes an adapter plate for mounting to Crouse-Hinds® EDS series and Appleton® EFD series back boxes.
UL Listed for Class 1, Div. 2, Groups B, C, D.*

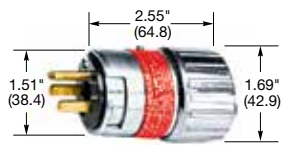

UGP15231



Acceptor® Hazardous Location Plugs




15A 125V
NEMA 5-15P
UL CSA



20A 125V
NEMA 5-20P
UL CSA

| Description | Catalog Number |
|---|---------------------------------|
| Explosion and dust ignition proof. Class I, Div. 1 & 2, Groups B, C, D Class II, Div. 1 & 2, Groups E, F, G Class III NEMA® 3, 7 B C D, 9 F G | UGP15231 UGP20231 |



SWB1

SWB Series Boxes

| Hub Size | 1-Gang Dead End | 1-Gang Feed Thru |
|---|-----------------|------------------|
| ½ in. NPT | SWB1 | SWB4 |
| ¾ in. NPT | SWB2 | SWB5 |
| Class I, Div. 1 & 2, Groups C, D Class II, Div. 1 & 2, Groups E, F, G Class III NEMA® 7 C D, 9 E F G | | |

Note: SWB series boxes will only accommodate Acceptor Series receptacles, not standard weatherproof covers.



SWB5

30A, 125V, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY




30A 125V
NEMA 5-30R
UL CSA
2 HP



30A 125V
NEMA 5-30P
UL CSA
2 HP

| Description | Cord Diameter | Catalog Number |
|--|-----------------------------|-------------------|
| Receptacle, black RTP. | - | HBL9308 |
| Receptacle, orange, isolated ground ^A . | - | IG9308 |
| Plug, nylon, angle, 4-position. | .625"-1.187" (15.9-30.1) | - HBL9309* |



HBL9308

30A, 125V, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY




30A 125V
NEMA TT-30R
UL Listed
2 HP



30A 125V
NEMA TT-30P
UL Listed
2 HP

| Description | Cord Diameter | Catalog Number |
|---|-----------------------------|-------------------|
| Receptacle, black RTP. Travel Trailer use only. | - | HBLTT30R |
| Plug, nylon, angle. Travel Trailer use only. | .625"-1.187" (15.9-30.1) | - HBLTT30P |



IG9308

30A, 250V, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY




30A 250V
NEMA 6-30R
UL CSA
2 HP



30A 250V
NEMA 6-30P
UL CSA
2 HP

| Description | Cord Diameter | Catalog Number |
|--|-----------------------------|-------------------|
| Receptacle, black RTP. | - | HBL9330 |
| Receptacle, orange, isolated ground ^A . | - | IG9330 |
| Plug, nylon, angle, 4-position | .625"-1.187" (15.9-30.1) | - HBL9331* |

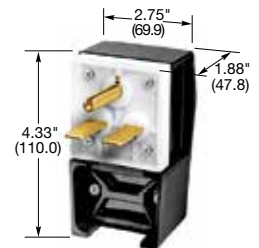

HBL9331

30A, 277V AC, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY




30A 277V AC
NEMA 7-30R
UL CSA
3 HP



30A 277V AC
NEMA 7-30P
UL CSA
3 HP

| Description | Cord Diameter | Catalog Number |
|---------------------------------|-----------------------------|-------------------|
| Receptacle, black RTP. | - | HBL9315 |
| Plug, nylon, angle, 4-position. | .625"-1.187" (15.9-30.1) | - HBL9319* |

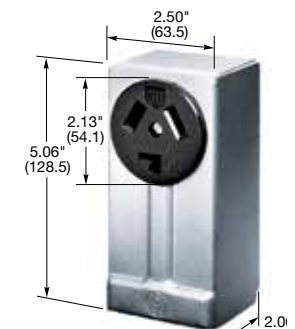

HBL9395

30A, 125/250V, 3 Pole, 3 Wire Non-Grounding, Receptacles and Plugs

IP20
SUITABILITY




30A 125/250V
NEMA 10-30R
UL Listed
2(2) HP



30A 125/250V
NEMA 10-30P
UL Listed
2(2) HP


| Description | Cord Diameter | Catalog Number |
|---|-----------------------------|-------------------|
| Receptacle, black phenolic. | - | HBL9350 |
| Receptacle, surface mount aluminum housing. | - | HBL9395 |
| Plug, Insulgrip®, nylon. | .625"-1.00" (15.9-25.4) | - HBL9337C |
| Plug, nylon, angle, 4-position. | .625"-1.187" (15.9-30.1) | - HBL9333 |

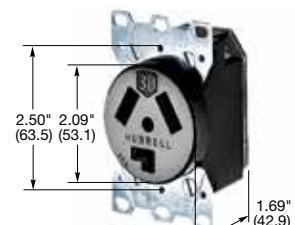

HBL9350

Note: RTP is an abbreviation for reinforced thermoplastic polyester.
^ASee section N for additional information on isolated ground devices.
 *Not Fed. Spec. Listed.
 See page A-49 for accessories.

Dimensions in Inches (mm)



HBL9430A

30A, 125/250V, 3 Pole, 4 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY




30A 125/250V
NEMA 14-30R
2(2) HP



30A 125/250V
NEMA 14-30P
2(2) HP

| Description | Cord Diameter | Catalog Number | |
|---------------------------------|-----------------------------|-----------------|-----------------|
| Receptacle, black RTP. | - | HBL9430A | - |
| Plug, nylon. | .625"-1.310" (15.9-33.3) | - | HBL9431C |
| Plug, nylon, angle, 4-position. | .625"-1.310" (15.9-33.3) | - | HBL9432C |



HBL9431C

30A, 3Ø 250V AC, 3 Pole, 4 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY



30A 3Ø 250V AC
NEMA 15-30R
3 HP



30A 3Ø 250V AC
NEMA 15-30P
3 HP

| Description | Cord Diameter | Catalog Number | |
|---------------------------------|-----------------------------|-----------------|-----------------|
| Receptacle, black RTP. | - | HBL8430A | - |
| Plug, nylon. | .625"-1.310" (15.9-33.3) | - | HBL8431C |
| Plug, nylon, angle, 4-position. | .625"-1.310" (15.9-33.3) | - | HBL8432C |



HBL9432C



30A, 3ØY 120/208V AC, 4 Pole, 4 Wire Non-Grounding, Receptacles and Plugs


IP20
SUITABILITY



30A 3ØY
120/208V AC
NEMA 18-30R
UL Listed
3 HP




30A 3ØY
120/208V AC
NEMA 18-30P
UL Listed
3 HP



HBL8330A

| Description | Cord Diameter | Catalog Number | |
|------------------------|-----------------------------|-----------------|-----------------|
| Receptacle, black RTP. | - | HBL8330A | - |
| Plug, nylon. | .625"-1.310" (15.9-33.3) | - | HBL8331C |

Note: RTP is an abbreviation for reinforced thermoplastic polyester.
See pages A-49 and A-50 for accessories.



HBL8331C

Dimensions in Inches (mm)

50A, 125V, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY




50A 125V
NEMA 5-50R
UL CSA
2 HP



50A 125V
NEMA 5-50P
UL CSA
2 HP

| Description | Cord Diameter | Catalog Number | |
|---------------------------------|-----------------------------|----------------|----------------|
| Receptacle, black RTP. | - | HBL9360 | - |
| Plug, nylon, angle, 4-position. | .625"-1.187" (15.9-30.2) | - | HBL9361 |



HBL9361

50A, 250V, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY




50A 250V
NEMA 6-50R
UL CSA
3 HP



50A 250V
NEMA 6-50P
UL CSA
3 HP

| Description | Cord Diameter | Catalog Number | |
|---------------------------------|-----------------------------|----------------|----------------|
| Receptacle, black RTP. | - | HBL9367 | - |
| Plug, nylon, angle, 4-position. | .625"-1.187" (15.9-30.2) | - | HBL9368 |



HBL7962

50A, 277V AC, 2 Pole, 3 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY




50A 277V AC
NEMA 7-50R
UL CSA
5 HP



50A 277V AC
NEMA 7-50P
UL CSA
5 HP

| Description | Cord Diameter | Catalog Number | |
|---------------------------------|-----------------------------|----------------|----------------|
| Receptacle, black RTP. | - | HBL9365 | - |
| Plug, nylon, angle, 4-position. | .625"-1.187" (15.9-30.2) | - | HBL9379 |

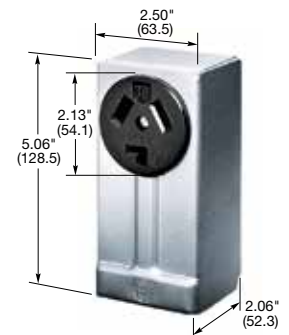

Representative of surface mount receptacle

50A, 125/250V, 3 Pole, 3 Wire Non-Grounding, Receptacles, Connector Body and Plugs

IP20
SUITABILITY




50A 125/250V
NEMA 10-50R
UL Listed
3(2) HP




50A 125/250V
NEMA 10-50P
UL Listed
3(2) HP

| Description | Cord Diameter | Catalog Number | |
|---|-----------------------------|-----------------|-----------------|
| Receptacle, black phenolic. | - | HBL7962 | - |
| Receptacle, surface mount aluminum housing. | - | HBL7940 | - |
| Connector body, Insulgrip, nylon. | .625"-1.218" (15.9-30.9) | HBL7515C | - |
| Plug, Insulgrip, nylon. | .625"-1.218" (15.9-30.9) | - | HBL7513C |
| Plug, nylon, angle, 4-position. | .625"-1.187" (15.9-30.2) | - | HBL7977 |




HBL7515C



HBL7513C

Note: RTP is an abbreviation for reinforced thermoplastic polyester.
See pages A-49 and A-50 for accessories.


Dimensions in Inches (mm)




HBL9450A



HBL9451C



HBL9452C



HBL8350A

50A, 125/250V, 3 Pole, 4 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY



50A 125/250V
NEMA 14-50R
UL CSA
3(2) HP



50A 125/250V
NEMA 14-50P
UL CSA
3(2) HP

| Description | Cord Diameter | Catalog Number |
|---------------------------------|-----------------------------|-------------------|
| Receptacle, black RTP. | - | HBL9450A |
| Plug, nylon. | .625"-1.310" (15.9-33.3) | - HBL9451C |
| Plug, nylon, angle, 4-position. | .625"-1.310" (15.9-33.3) | - HBL9452C |

50A, 3Ø 250V AC, 3 Pole, 4 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY



50A 3Ø 250V AC
NEMA 15-50R
UL CSA
7.5 HP



50A 3Ø 250V AC
NEMA 15-50P
UL CSA
7.5 HP

| Description | Cord Diameter | Catalog Number |
|---------------------------------|-----------------------------|-------------------|
| Receptacle, black RTP. | - | HBL8450A |
| Plug, nylon. | .625"-1.310" (15.9-33.3) | - HBL8451C |
| Plug, nylon, angle, 4-position. | .625"-1.310" (15.9-33.3) | - HBL8452C |



50A, 3ØY 120/208V AC, 4 Pole, 4 Wire Non-Grounding, Receptacles and Plugs

IP20
SUITABILITY



50A 3ØY
120/208V AC
NEMA 18-50R
UL Listed
7.5 HP



50A 3ØY
120/208V AC
NEMA 18-50P
UL Listed
7.5 HP

| Description | Cord Diameter | Catalog Number |
|---------------------------------|-----------------------------|-------------------|
| Receptacle, black RTP. | - | HBL8350A |
| Plug, nylon, angle, 4-position. | .625"-1.310" (15.9-33.3) | - HBL8352C |

*Note: RTP is an abbreviation for reinforced thermoplastic polyester.
See page A-50 for accessories.*

Dimensions in Inches (mm)

60A, 125/250V, 3 Pole, 4 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY




**60A 125/250V
NEMA 14-60R
UL CSA
3(2) HP**



**60A 125/250V
NEMA 14-60P
UL CSA
3(2) HP**

| Description | Cord Diameter | Catalog Number |
|---------------------------------|-----------------------------|-----------------|
| Receptacle, black RTP. | - | HBL9460A |
| Plug, nylon. | .625"-1.310" (15.9-33.3) | HBL9461C |
| Plug, nylon, angle, 4-position. | .625"-1.310" (15.9-33.3) | HBL9462C |



HBL9460A

60A, 3Ø 250V AC, 3 Pole, 4 Wire Grounding, Receptacles and Plugs

IP20
SUITABILITY



**60A 3Ø 250V AC
NEMA 15-60R
UL CSA
10 HP**



**60A 3Ø 250V AC
NEMA 15-60P
UL CSA
10 HP**

| Description | Cord Diameter | Catalog Number |
|---------------------------------|-----------------------------|-----------------|
| Receptacle, black RTP. | - | HBL8460A |
| Plug, nylon. | .625"-1.310" (15.9-33.3) | HBL8461C |
| Plug, nylon, angle, 4-position. | .625"-1.310" (15.9-33.3) | HBL8462C |



HBL8461C



HBL8462C

60A, 3ØY 120/208V AC, 4 Pole, 4 Wire Non-Grounding, Receptacles and Plugs

IP20
SUITABILITY




**60A 3ØY
120/208V AC
NEMA 18-60R
UL Listed
7.5 HP**



**60A 3ØY
120/208V AC
NEMA 18-60P
UL Listed
7.5 HP**

| Description | Cord Diameter | Catalog Number |
|---------------------------------|-----------------------------|-----------------|
| Receptacle, black RTP. | - | HBL7301A |
| Plug, nylon. | .625"-1.310" (15.9-33.3) | HBL7303C |
| Plug, nylon, angle, 4-position. | .625"-1.310" (15.9-33.3) | HBL7302C |



HBL7301A


Note: RTP is an abbreviation for reinforced thermoplastic polyester.
See page A-50 for accessories.

Dimensions in Inches (mm)



Miscellaneous and Combination Receptacles

2 Pole, 3 Wire Grounding



Miscellaneous Receptacles



HBL5236




HBL5235


| Description | Catalog Number |
|--|---------------------|
| Receptacle, display type, brown phenolic with .060 in. brass plate and blank flush plug. | HBL5236 |
| Replacement receptacle for HBL5236. | HBL5236M2 |
| Replacement threaded plug for HBL5236. | HBL5236PLUG* |
| Receptacle, wooden floors, brown phenolic with .060 in. brass plate, blank flush plug and box. | HBL6236 |
| Receptacle, clock hanger, brown with stainless steel plate. | HBL5235 |
| Four outlet cluster, brown phenolic, steel cover, swivel hook. Cord grip range .296-.562 in. (7.5-14.3) cord not supplied. | HBL9259* |

Note: *Not UL Listed or CSA certified.





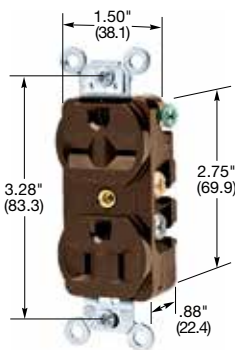










Special Combination Duplex Receptacles



HBL9259



HBL5292

| Description | Catalog Number |
|--|-----------------|
| 15A, 125V  Brown RTP, 1 feed, 1 return, back/side wired | HBL4792 |
|  Brown RTP, 2 feeds, 1 return, side wired | HBL4794 |
| 15A, 125V  Brown RTP, 2 feeds, 2 returns, side wired | HBL4795 |
| 15A, 250V  Brown nylon face, 2 circuit, back and side wired | HBL5292 |
| 15A, 125V  Ivory nylon face, 2 circuit, back and side wired | HBL5292I |
| 20A, 250V  Brown nylon face, 2 circuit, back and side wired | HBL5492 |
|  Ivory nylon face, 2 circuit, back and side wired | HBL5492I |
| 20A, 125V  Brown RTP, 2 feeds, 1 return, common ground | HBL7371 |
| 10A, 250V  Brown RTP, 2 feeds, 1 return, common ground | HBL7371 |
| 15A, 125V  Brown RTP, 2 feeds, 1 return, common ground | HBL7371 |
| 20A, 125V  Brown RTP, 2 feeds, 1 return, common ground | HBL7371 |
| 20A, 125V  Brown RTP, 2 feeds, 1 return, common ground | HBL7371 |
| 20A, 125V  Brown RTP, 2 feeds, 1 return, common ground | HBL7371 |
| 20A, 125V  Brown RTP, 2 feeds, 1 return, common ground | HBL7371 |
| 20A, 125V  Brown RTP, 2 feeds, 1 return, common ground | HBL7371 |

Note: This device will only accept 20A grounding plugs.

Note: RTP is an abbreviation for reinforced thermoplastic polyester.

*Not UL Listed or CSA certified.

See page A-47 for accessories.

Dimensions in Inches (mm)

Straight Blade Devices



Accessories

For 15 and 20 Ampere, 125 and 250 Volts and 277 Volts AC Devices



Wallplates, 1-Gang

| Description | Color | Duplex Receptacles Catalog Number | Style Line® Receptacles Catalog Number | Single Receptacle Plate 1.40 in. (35.6) Dia. Catalog Number |
|--|--------------|-----------------------------------|--|---|
| Nylon, smooth. | Almond | NP8AL | NP26AL | NP7AL |
| | Black | NP8BK | NP26BK | NP7BK |
| | Brown | NP8 | NP26 | NP7 |
| | Gray | NP8GY | NP26GY | NP7GY |
| | Ivory | NP8I | NP26I | NP7I |
| | Light Almond | NP8LA | NP26LA | NP7LA |
| | Office White | NP8OW | NP26OW | NP7OW |
| | Orange | NP8OR | - | - |
| | Red | NP8R | NP26R | NP7R |
| | White | NP8W | NP26W | NP7W |
| Stainless steel 302/304, .035 in. (0.9) horizontal brushed finish. | | SS8 | SS26 | SS7 |
| Brass .04 in. (1.0), horizontal brushed finish. | | SB8 | SB26 | SB7 |
| Aluminum .05 in. (1.3), horizontal brushed finish. | | SA8 | - | SA7 |



NP8



NP26I



SS7

Weatherproof Covers

| Description | Duplex Receptacles Catalog Number | Single Receptacle Plate 1.40 in. (35.6) Dia. Catalog Number |
|---------------------------------------|-----------------------------------|---|
| RTP, gray, for FS/FD box mounting. | HBL5221 | HBL7423WO |
| RTP, yellow, for FS/FD box mounting. | HBL52CM21 | HBL74CM23WO |
| RTP, gray, for device mounting. | HBL5222 | - |
| RTP, yellow, for device mounting. | HBL52CM22 | - |
| Cast aluminum for FS/FD box mounting. | HBL5206WO | HBL7420 |
| Cast aluminum for device mounting. | HBL5205WO | - |

Note: All weatherproof plates are UL Listed for Wet Locations.
 Those with suffix WO are listed for use with cover open, all others with cover closed.
 RTP is an abbreviation for reinforced thermoplastic polyester.
 See section O for additional information on cover plates.



HBL52CM22



HBL5206WO



HBL7423WO

Dimensions in Inches (mm)



Accessories

For 15 and 20 Ampere, 125 and 250 Volts and 277 Volts AC Devices



WP1



IP44
SUITABILITY

Weatherproof Covers For Nylon Flanged Inlets and Flanged Receptacles

| Description | Catalog Number |
|------------------------------------|----------------|
| RTP, gray, for FS/FD box mounting. | WP1 |

*Note: RTP is an abbreviation for reinforced thermoplastic polyester.
See page O-21 for additional information on weatherproof covers.*



HBL6017

IP55*
SUITABILITY

Weatherproof Boots

| Description | Catalog Number |
|---|------------------|
| Seal-Tite® triple seal, black elastomer cover for Insulgrip® plugs (HBL5266C style), when used in a cord set, and connector bodies (HBL5269C style), when used with flanged inlets. | HBL6017 |
| Same as above except yellow. | HBL60CM17 |
| Seal-Tite® triple seal black elastomer cover for Insulgrip® connector bodies when used in a cord set. | HBL6018 |
| Same as above except yellow. | HBL60CM18 |
| Closure plug, black. | HBL6019 |
| Closure plug, yellow. | HBL60CM19 |

*Note: *IP55 when installed and used properly with mating components.
Boots are not UL Listed or CSA Certified.*



HBL60CM19
Shown with HBL6018



HLDMP

PLUGOUT® Device

| Description | Catalog Number |
|--|----------------|
| Electrical plug lockout devices for 15 and 20A straight blade plugs. | HLDMP** |
| PLUGOUT® Lockout device for 20 and 30A Hubbell plugs and others. | HLD** |

*Note: **Not UL Listed or CSA Certified.
See section BB for additional information on lockout devices.*



HLD

Inserts

| Description | Catalog Number |
|--|-------------------|
| Replacement cord grip inserts for Valise® device, (bag of 40). | HBLVCGBK** |

*Note: **Not UL Listed or CSA Certified.*

Dimensions in Inches (mm)

Straight Blade Devices



Accessories

For 3 Wire 30 and 50 Ampere, 125 and 250 Volts and 277 Volts AC



Wallplates

| Description | Color | Single Receptacle Plate 2.16 in. (54.9) Dia. Catalog Number |
|---|-------|---|
| Nylon, smooth, 1-gang. | Black | NP724BK |
| Nylon, smooth, 2-gang. | Black | NP703BK |
| Aluminum, .05 in. (1.3), 1-gang, smooth horizontal brushed finish. | | SA723 |
| Stainless steel 302/304, .035 in. (0.9), 1-gang, smooth horizontal brushed finish. | | SS723 |
| Stainless steel 302/304, .035 in. (0.9), 2-gang, smooth horizontal brushed finish. | | SS703 |



SS723



SS703



IP44
SUITABILITY

Weatherproof Lift Covers

| Description | Catalog Number |
|---|----------------|
| Cast aluminum for FS/FD box mounting for 30A. | HBL9420 |
| Cast aluminum for FS/FD box mounting for 50A. | HBL9425 |



HBL9420

PLUGOUT® Device

| Description | Catalog Number |
|--|----------------|
| Electrical plug lockout device for 30, 50 and 60A devices. | HLD2 |

Note: See section BB for additional information on lockout devices.



HLD2

Dimensions in Inches (mm)



Accessories

For 4 Wire 30, 50 and 60 Ampere, 125/250 Volts, 3Ø 250 and 3ØY 120/208 Volts AC



SS701



Wallplates, 2-Gang

| Description | Catalog Number |
|---|----------------|
| Single Receptacle Plate 2.48 in. (63.0) Dia. | SB701 |
| Brass .04 in. (1.0), brushed, smooth. | SS701 |
| Stainless steel 302/304, .035 in. (0.9), smooth horizontal brushed finish. | |



HBL7777A



IP44
SUITABILITY

Weatherproof Lift Covers

| Description | Catalog Number |
|---|-------------------|
| RTP, gray, lift cover plate. Will fit FS/FD boxes having plate mounting hole 3.25 in. x 3.75 in. (82.5 x 95.2), centers. Only for use with receptacles on pages A-40 to A-43 with "A" suffix. | HBL7777A |
| Same as above except yellow. | HBL77CM77A |

Note: RTP is an abbreviation for reinforced thermoplastic polyester.



HLD2

PLUGOUT® Device

| Description | Catalog Number |
|--|----------------|
| Electrical plug lockout device for 30, 50 and 60A devices. | HLD2 |

Note: See section BB for additional information on lockout devices.

Dimensions in Inches (mm)



Technical Information

HBL® Extra Heavy Duty, Straight Blade Hospital Grade Duplex Receptacles



HBL8200GY

Specifications

| Receptacles | Part | Description |
|--|-------------------------------|---|
| Typical Specification – Catalog No. HBL8200 | Receptacle | 15A |
| Manufacturer’s Identification – Hubbell HBL8200 | Top | PBT* |
| Description – Hospital Grade, Straight Blade Duplex Receptacle | Base | RTP** |
| Type – 2 Pole, 3 Wire, Grounding | By-Pass Power Contacts | .037 in. (.9) Brass – Nickel Finish |
| Rating – 15A, 125V | Clamping Plate | .031 in. (.8) Brass – Nickel Finish |
| Certification: UL Listed to UL 498 File E2186, Fed. Spec. WC596, | Mounting Strap | .050 in. (1.3) Brass – Nickel Finish |
| Hospital Grade, NEMA® WD-6 Compliant | Line Terminal Screws | #10-32 Silicone Bronze, Multiple Drive |
| Certified to CSA, C22.2, No. 42 File 285 | Hex Head Grounding Screw | #10-32 (Green) Silicon Bronze, Multiple Drive |
| | Center Assembly Rivet | Silicon Bronze |
| | Automatic Self-Grounding Clip | Stainless Steel |
| | Flat Head Mounting Screws | Stainless Steel |

Performance

| Electrical | |
|--------------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V or 250V as rated. |
| Current Interrupting | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA (Brass, White, Green). |
| Terminal Accommodation | #14-10 AWG stranded or solid copper conductor only. |
| Product Identification | Ratings are a permanent part of the device. |
| Environmental – Material | |
| Flammability | UL 94V-0 and UL 94-5 VA. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact). |

Note: *Polybutylene Terephthalate.

**Reinforced Thermoplastic Polyester.



Technical Information

HBL® Extra Heavy Duty, Straight Blade Specification Grade Duplex Receptacles



HBL5262

Specifications

| Receptacles | Part | Description |
|---|-------------------------------|--------------------------------------|
| Typical Specification – Catalog No. HBL5262 | Receptacle | 15A |
| Manufacturer's Identification – Hubbell HBL5262 | Top | Nylon |
| Description – Heavy Duty Straight Blade Duplex Receptacle | Base | RTP* |
| Type – 2 Pole, 3 Wire, Grounding | By-Pass Power Contacts | .037 in. (.9) Brass |
| Rating – 15A, 125V | Wire Clamps | .031 in. (.8) Brass |
| Certification: UL Listed to UL498 File E2186, Guide RTRT | Mounting Strap | .050 in. (1.3) Brass |
| Fed. Spec. WC596, Meets NEMA® WD-6 Compliant | Line Terminal Screws | #10-32 Brass, Multiple Drive |
| Certified to CSA, C22.2, No. 42 File 285 | Ground Screw | #10-32 Brass, Multiple Drive (Green) |
| | Center Assembly Rivet | Brass |
| | Automatic Self-Grounding Clip | Stainless Steel |
| | Flat Head Mounting Screws | Steel-Zinc Plated |
| | Ground Tension Clips | Steel-Nickel Finish |

Performance

| Electrical | |
|--------------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V or 250V as rated. |
| Current Interrupting | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA (Brass, White, Green). |
| Terminal Accommodation | #14-10 AWG stranded or solid copper conductor only. |
| Product Identification | Ratings are a permanent part of the device. |
| Environmental – Material | |
| Flammability | Top: UL 94V-2. Base: UL 94V-0 and UL 94-5 VA. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact). |

Note: *Reinforced Thermoplastic Polyester.



Technical Information

HBL® Compact Extra Heavy Duty, Specification Grade Receptacles



HBL5252

Specifications

| Receptacles | Part | Description |
|---|-------------------------------|-------------------------------------|
| Typical Specification – Catalog No. HBL5252 | Receptacle | 15A |
| Manufacturer’s Identification – Hubbell HBL5252 | Top | Nylon |
| Description – Straight Blade Duplex Receptacle | Base | RTP* |
| Type – 2 Pole, 3 Wire, Grounding | Triple Wipe Power Contacts | .032 in. (.8) Brass |
| Rating – 15A, 125V | Wire Clamps | .062 in. (1.8) Steel |
| Certification – UL Listed to UL 498 File E2186, Fed. Spec. WC596, Certified to CSA 22.2, No. 42 File 285 | Mounting Strap | .050 in. (1.3) Brass |
| | Line Terminal Screws | #8-32 Brass, Multiple Drive |
| | Ground Screw | #8-32 Brass, Multiple Drive (Green) |
| | Center Assembly Rivet | Brass |
| | Automatic Self-Grounding Clip | Stainless Steel |
| | Flat Head Mounting Screws | Steel-Zinc Plated |

Performance

| Electrical | |
|--------------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V or 250V as rated. |
| Current Interrupting | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| Terminal Identification | Terminals identified in accordance with UL 498 (Brass, White, Green). |
| Terminal Accommodation | #14-10 AWG stranded or solid copper conductor only. |
| Product Identification | Ratings are a permanent part of the device. |
| Environmental – Material | |
| Flammability | UL 94V-2. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact). |

Note: *Reinforced Thermoplastic Polyester.

Please consult the factory for product dimensions and specifications of other products listed in this catalog.



Technical Information

HBL® Compact Heavy Duty Style Line®, Specification Grade and Hospital Grade Straight Blade Duplex Receptacles



HBL2152



HBL2172

Specifications

| Receptacle | Part | Description |
|--|---------------------------------|------------------------------------|
| Typical Specification – Catalog No. HBL2152 | Receptacle | 15A |
| Manufacturer's Identification – Hubbell HBL2152 Receptacle | Top | Nylon |
| Description – Straight Blade Duplex Receptacle | Base | Nylon |
| Type – 2 Pole, 3 Wire Grounding | Triple Wipe Power Contacts | .031 in. (.8) Brass |
| Rating – 15A, 125V | Wire Clamp | .062 in. (1.8) Steel-Nickel Finish |
| Certification – UL File No. E2186 | Mounting Strap | .050 in. (1.3) Galvanized Steel |
| Certified to CSA File No. 285 | Ground Contact | .031 in. (.8) Brass |
| | Line Terminal Screws | #8-32 Brass, Multiple Drive |
| | Ground Screw | #8-32 Brass, Multiple Drive |
| | Automatic Self-Grounding Staple | Stainless Steel |
| | Mounting Screws | Zinc Plated Steel |
| Receptacle | Part | Description |
| Typical Specification – Catalog No. HBL2172 | Receptacle | 15A |
| Manufacturer's Identification – Hubbell HBL2182 Receptacle | Top | Nylon |
| Description – Straight Blade Duplex Receptacle | Base | RTP* |
| Type – 2 Pole, 3 Wire Grounding | Triple Wipe Power Contacts | .031 in. (.8) Brass |
| Rating – 15A, 125V | Wire Clamp | .062 in. (1.8) Steel-Nickel Finish |
| Certification – UL Listed to UL498 File E2186, | Mounting Strap | .050 in. (1.3) Galvanized Steel |
| Fed. Spec. WC596, Certified to CSA File No. 285 | Ground Contact | .031 in. (.8) Brass |
| | Line Terminal Screws | #8-32 Brass, Multiple Drive |
| | Ground Screw | #8-32 Brass, Multiple Drive |
| | Automatic Self-Grounding Staple | Stainless Steel |
| | Mounting Screws | Zinc Plated Steel |

Performance


| Electrical | |
|--------------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V. |
| Current Interrupting | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA (Brass, White, Green). |
| Terminal Accommodation | #14-10 AWG stranded or solid copper conductor only. |
| Product Identification | Ratings are a permanent part of the device. |
| Environmental – Material | |
| Flammability | UL 94V-2. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact). |

Note: *Reinforced Thermoplastic Polyester.

Please consult the factory for product dimensions and specifications of other products listed in this catalog.



Technical Information

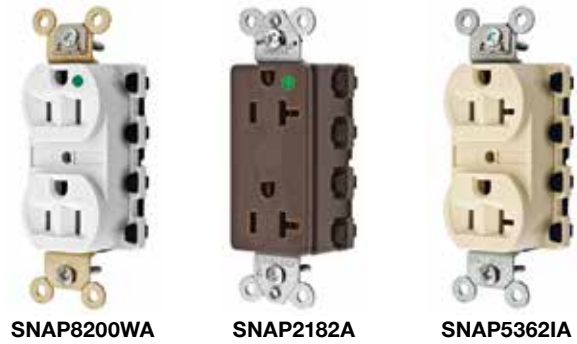

SNAPConnect® Straight Blade Duplex Receptacles Specification Grade and Hospital Grade

Specifications

| Receptacle | Part | Description |
|--|-------------------------------|--------------------------------|
| Typical Specification – Catalog No. SNAP8200 | Receptacle | 15A |
| Manufacturer's Identification – Hubbell SNAP8200 | Top | Nylon |
| Description – Straight Blade Duplex Receptacle | Base | Nylon |
| Type – 2 Pole, 3 Wire, Grounding | Triple Wipe Power Contacts | Brass |
| Rating – 15A, 125V | Mounting Strap | Galvanized Steel; Brass (HG) |
| Certification – UL Listed to UL 498 | Automatic Self-Grounding Clip | Stainless Steel |
| Fed. Spec. WC596, Certified to CSA 22.2, No. 42 | Flat Head Mounting Screws | Steel-Zinc Plated/Self Tapping |

| Connector | Contact | Connector Body | Wire |
|-----------|---------|---------------------|--|
| SNAP1RA | Brass | Clear Polycarbonate | 6" Solid copper #12 AWG THHN/THWN-2 600V, T90 Nylon FT-1, PVC 90°C (min). |
| SNAP2RA | Brass | Clear Polycarbonate | 6" Stranded copper #12 AWG THHN/THWN-2 600V, T90 Nylon FT-1, PVC 90°C (min). |


Performance

| Electrical | |
|----------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V as rated. |
| Current Interrupting | Receptacle certified for current interrupting at full rated current with equivalently rated NEMA® plug. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated DC current. |

| Mechanical | |
|------------------------------------|---|
| Terminal Wire Leads Identification | Terminal wire leads identified in accordance with UL 498 (Black, White, Green). |
| Product Identification | Ratings are a permanent part of the device. |

| Environmental – Material | |
|--------------------------|--|
| Flammability | UL 94V-2. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (without impact). |

Dimensions

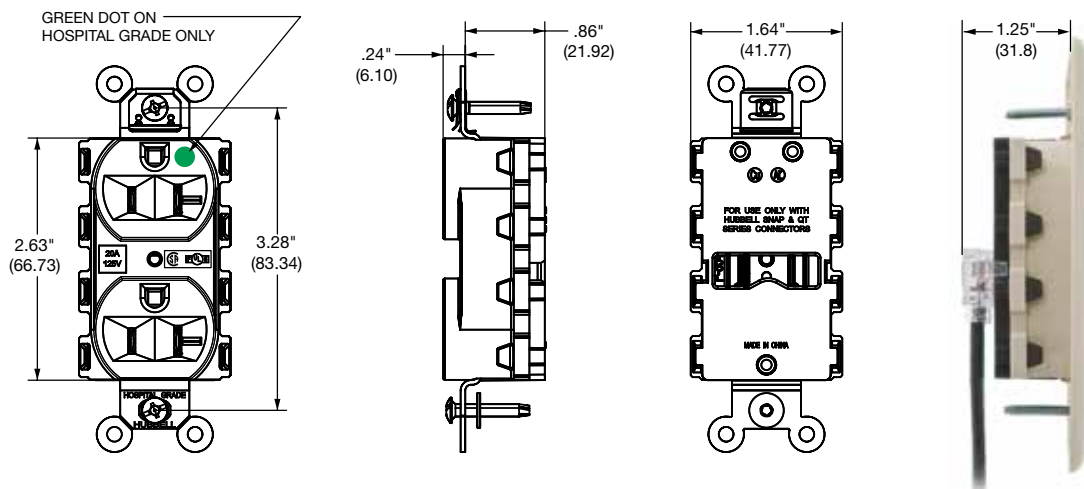

NEMA® is a registered trademark of the National Electrical Manufacturers Association.



Technical Information

Hubbell-PRO Heavy Duty, Straight Blade Hospital Grade Duplex Receptacles



8200REDLTRA



2182IVLTRA

Specifications

| Receptacle | Part | Description |
|---|---------------------------------|---------------------------|
| Typical Specification - Catalog No. 8200 | Receptacle | 15A |
| Manufacturer's Identification - Hubbell-PRO 8200 | Top | Nylon |
| Description - Straight Blade Hospital Grade Duplex Receptacle | Base | Nylon |
| Type - 2 Pole, 3 Wire, Grounding | Triple Wipe Power Contacts | .0295 in. Brass |
| Rating - 15A, 125V | Clamping Plate | Plated Steel |
| Certification - UL Listed to UL 498, Fed. Spec. WC596 | Mounting Strap | .040 in. Galvanized Steel |
| Hospital Grade, NEMA® WD-6 Compliant | Terminal Screws | Plated Steel |
| Certified to CSA | Hex Head Grounding Screw | Plated Steel |
| | Automatic Self-Grounding Staple | Stainless Steel |
| | Mounting Screws | Zinc Plated Steel |

Performance

| Electrical | |
|--------------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V. |
| Current Interrupting | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA (Brass, White, Green) |
| Terminal Accommodation | #14-10 AWG stranded or solid copper conductor only. |
| Product Identification | Ratings are a permanent part of the device. |
| Environmental – Material | |
| Flammability | UL 94V-2. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact). |

NEMA® is a registered trademark of the National Electrical Manufacturers Association.



Technical Information

USB Charger Tamper-Resistant, Straight Blade Hospital Grade and Specification Grade Duplex Receptacles



USB8300C5R



USB15AC5W

Specifications

| USB Charger Receptacle | Part | Description |
|---|---------------------------------|--|
| Typical Specification - Catalog No. USB8300A5 | Charger Receptacle | Electrical 20 Amp 125V AC USB 5.0 Amp 5V DC |
| Manufacturer's Identification - Hubbell USB8300A5 | Ports | Type A, 2.0 |
| Available Type USB Charger: A, A&C and C | LED | Green Indicator |
| Receptacle | Top | Nylon |
| Description - Hospital Grade, Straight Blade Duplex Receptacle | Base | Nylon |
| Type - 2 Pole, 3 Wire, Grounding | Triple Wipe Power Contacts | .030 in. Cooper Alloy |
| Rating - 20 Amp, 125V AC, USB 3 Amp, 5V DC | Clamping Plate | Plated Steel |
| Certification - cULus Listed to UL498 and UL1310 | Mounting Strap | .040 in. Galvanized Steel |
| Hospital Grade, NEMA® WD-6 Compliant (USB8200 and 8300 series only) | Terminal Screws | Plated Steel |
| Complies with battery charging specification USB BC1.2 | Hex Head Grounding Screw | Plated Steel |
| Complies with Part 15 of the FCC rules | Automatic Self-Grounding Staple | Stainless Steel |
| Compatible with USB 1.1/2.0/3.0 devices, including Apple products | Mounting Screws | Zinc Plated Steel |

Performance

| Electrical | |
|--------------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V. |
| Current Interrupting | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| USB Port | Stainless Steel Rated for 10,000 plug insertions and removal |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA (Brass, White, Green) |
| Terminal Accommodation | #14-10 AWG stranded or solid copper conductor only. |
| Product Identification | Ratings are a permanent part of the device. |
| Circuit Feed-Through | 20 Amp 125 Volt |
| Environmental - Material | |
| Flammability | UL 94V-2. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact). |

NEMA® is a registered trademark of the National Electrical Manufacturers Association.



Technical Information

Hubbell-PRO Heavy Duty, Straight Blade Specification Grade Duplex Receptacles



Specifications

| Receptacle, Smooth Nylon Face | Part | Description |
|--|---------------------------------|------------------------------------|
| Typical Specification – Catalog No. 5252A | Receptacle | 15A |
| Manufacturer's Identification – Hubbell 5252A Receptacle | Top | Nylon |
| Description – Straight Blade Duplex Receptacle | Base | RTP* |
| Type – 2 Pole, 3 Wire, Grounding | Triple Wipe Power Contacts | .031 in. (.8) Brass |
| Rating – 15A, 125V | Wire Clamp | .062 in. (1.8) Steel-Nickel Finish |
| Certification – UL Listed to UL498 File E2186 | Mounting Strap | .040 in. (1) Galvanized Steel |
| Certified to CSA File No. 285 | Ground Contact | .031 in. (.8) Brass |
| NEMA® WD-6 Compliant | Line Terminal Screws | #8-32 Brass, Multiple Drive |
| | Ground Screw | #8-32 Brass, Multiple Drive |
| | Center Assembly Staple | .040 in. (1) Galvanized Steel |
| | Automatic Self-Grounding Staple | Stainless Steel |
| | Mounting Screws | Zinc Plated Steel |
| Receptacle, Finder Groove Face | Part | Description |
| Typical Specification – Catalog No. 5262 | Receptacle | 15A |
| Manufacturer's Identification – Hubbell 5262 Receptacle | Top | Nylon |
| Description – Straight Blade Duplex Receptacle | Base | RTP* |
| Type – 2 Pole, 3 Wire, Grounding | Triple Wipe Power Contacts | .031 in. (.8) Brass |
| Rating – 15A, 125V | Wire Clamp | .062 in. (1.8) Steel-Nickel Finish |
| Certification – UL Listed to UL498 File E2186, | Mounting Strap | .040 in. (1) Galvanized Steel |
| Fed. Spec. WC596, Certified to CSA C22.2, No. 42 | Ground Contact | .031 in. (.8) Brass |
| NEMA® WD-6 Compliant | Line Terminal Screws | #8-32 Brass, Multiple Drive |
| | Ground Screw | #8-32 Brass, Multiple Drive |
| | Center Assembly Staple | .040 in. (1) Galvanized Steel |
| | Automatic Self-Grounding Staple | Stainless Steel |
| | Mounting Screws | Zinc Plated Steel |

Performance

| Electrical | |
|--------------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V. |
| Current Interrupting | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA (Brass, White, Green) |
| Terminal Accommodation | #14-10 AWG stranded or solid copper conductor only. |
| Product Identification | Ratings are a permanent part of the device. |
| Environmental – Material | |
| Flammability | UL 94V-2. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact). |

Note: *Reinforced Thermoplastic Polyester.

Please consult the factory for product dimensions and specifications of other products listed in this catalog.



Technical Information



Commercial Specification Grade Receptacles

Specifications

| Part | Standard | Weather Resistant |
|---------------------------------|------------------------------------|---------------------------------------|
| Top | Nylon | Nylon (UV Rated) |
| Base | Nylon | Nylon |
| Double Wipe Power Contacts | .030 in. (.8) Brass | .030 in. (.8) Brass |
| Wire Clamp | .062 in. (1.6) Steel-Nickel Plated | .062 in. (1.6) Steel-Nickel Plated |
| Finish | | |
| Mounting Strap | .040 in. (1) Steel (Galvanized) | .040 in. (1) Galvanized Steel |
| Ground Contact | .031 in. (.8) Brass | .031 in. (.8) Brass |
| Line Terminal Screws | #8-32 Plated Steel, Multiple Drive | #8-32 Stainless Steel, Multiple Drive |
| Ground Screw | #8-32 Plated Steel, Multiple Drive | #8-32 Stainless Steel, Multiple Drive |
| Automatic Self-Grounding Staple | Stainless Steel | Stainless Steel |
| Mounting Screws | Zinc Plated Steel | Stainless Steel |
| Certification | | |
| UL Listed | UL498 | UL498 |
| Fed. Spec. | WC596* | WC596* |
| Certified to CSA | C22.2, No. 42 | C22.2, No. 42 |

Performance

| Electrical | | |
|---------------------------------|--|--|
| Dielectric Voltage | Withstands 2,000V minimum. | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V. | 125V. |
| Current Interrupting | Certified for current interrupting at full rated current. | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 100 cycles of overload at 150% of rated current. | Max 30°C temperature rise at full rated current after 100 cycles of overload at 150% of rated current. |
| Mechanical | | |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA (Brass, White, Green). | Terminals identified in accordance with UL 498 and CSA (Brass, White, Green). |
| Terminal Accommodation | #14-10 AWG stranded or solid copper conductor only. | #14-10 AWG stranded or solid copper conductor only. |
| Product Identification | Ratings are a permanent part of the device. | Ratings are a permanent part of the device. |
| Environmental – Material | | |
| Flammability | UL 94V-2. | UL 94V-2. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact). | Maximum continuous 75°C; minimum -40°C (w/o impact). |

Note: *Decorator and Commercial Tamper-Resistant devices are not Fed. Spec. Listed.



Technical Information



HBL415I

4-PLEX® Receptacles

Specifications

| Receptacle | Part | Description |
|--|---------------------------------|-----------------------------|
| Typical Specification – Catalog No. HBL415 | Receptacle | 15 or 20A |
| Manufacturer's Identification – Hubbell 4-PLEX HBL415 | Top | Polycarbonate |
| Description – Straight Blade, Multiple Outlet Receptacle | Base | Polycarbonate |
| Type – 2 Pole, 3 Wire, Grounding | Power Contacts | .032 in. (.8) Brass |
| Rating 15A, 125V | Ground Contacts | .031 in. (.8) Brass |
| Certification – Listed to UL Standard 498 File E2186 | Ground Plate | .032 in. (.8) Plated Steel |
| Certified to CSA 22.2, No. 42 File 285 | (Hospital Grade) | .050 in. (1.3) Plated Steel |
| | Line and Neutral Terminal Plate | .031 in. (.8) Brass |
| | Line Terminal Screw | #8-32 Brass |
| | Ground Screw | #8-32 Brass (Green) |

Performance

| Electrical | |
|-------------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V. |
| Current Interrupting | Capable of withstanding a fault level of 1000A, per UL498. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload current at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| Terminal Identification | Terminals identified in accordance with UL498 and CSA (Brass, White, Green). |
| Terminal Accommodation | #14-12 AWG stranded or solid copper conductor only. |
| Product Identification | Ratings are a permanent part of the device. |
| Environmental | |
| Flammability | UL 94V-2. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact). |



Technical Information

Insulgrip® Plugs and Connector Bodies



HBL5266C



HBL5269C

Specifications

| Plugs | Part | Description |
|--|------|--------------------------------------|
| Typical Specification – Catalog No. HBL5266C | | Plug |
| Manufacturer's Identification – Hubbell HBL5266C | | Housing |
| Description – Straight Body Plug | | Blade Holder |
| Type – 2 Pole, 3 Wire, Grounding | | Retainer |
| Rating – 15A, 125V | | Cord Clamp |
| Verified to Fed. Spec. WC596 | | Contact Blades |
| Certification – UL Listed to UL498 File E1706, CSA Certified to C22.2 No. 42 File 280 | | Ground Contact Blade |
| IP Suitability – IP20 | | Line Terminal Screws |
| | | Ground Screw |
| | | Wire Clamps |
| | | 15A |
| | | Nylon – Black |
| | | Nylon – Natural |
| | | Polycarbonate – Clear |
| | | Nylon – Natural |
| | | .060 in. (1.5) Brass |
| | | .040 in. (1.0) Copper Alloy |
| | | #8-32 Brass, Multiple Drive |
| | | #8-32 Brass, Multiple Drive (Green) |
| | | .062 in. (1.6) Steel – Nickel Finish |
| Connector Bodies | Part | Description |
| Typical Specification – Catalog No. HBL5269C | | Connector Body |
| Manufacturer's Identification – Hubbell HBL5269C | | Housing |
| Description – Straight Body Connector | | Contact Holder |
| Type – 2 Pole, 3 Wire, Grounding | | Retainer |
| Rating – 15A, 125V | | Cord Clamp |
| Verified to Fed. Spec. WC596 | | Power Contacts |
| Certification – UL Listed to UL498 File E1706, CSA Certified to C22.2 No. 42 File 280 | | Line Terminal Screws |
| IP Suitability – IP20 | | Ground Screw |
| | | Wire Clamps |
| | | 15A |
| | | Nylon – Black |
| | | Nylon – Natural |
| | | Polycarbonate – Clear |
| | | Nylon – Natural |
| | | .040 in. (1.0) Copper Alloy |
| | | #8-32 Brass, Multiple Drive |
| | | #8-32 Brass, Multiple Drive (Green) |
| | | .062 in. (1.6) Steel – Nickel Finish |

Performance

| Electrical | |
|--------------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V or 250V as rated. |
| Current Interrupting | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| Terminal Identification | Terminals identified in accordance with UL498 and CSA (Brass, White, Green). |
| Terminal Accommodation | #18-10 AWG copper conductors only. |
| Product Identification | Ratings are a permanent part of the device. |
| Torque Range | 12 in./lb. terminal screws, 7 in./lb. assembly screws. |
| Cord Diameter Range | .230–.720 in. (5.8–18.3) integral cord grip. |
| Environmental – Material | |
| Flammability | UL 94HB or better. |
| Operating Temperature | Maximum continuous 75°C; minimum – 40°C (w/o impact). |



Technical Information

Valise® Plugs and Connectors



HBL5965VY



HBL5969VY

Specifications

| Plugs | Part | Description |
|--|----------------------------|-------------------------------|
| Typical Specification – Catalog No. HBL5965VY | Plug | 15A |
| Manufacturer's Identification – Hubbell HBL5965VY | Housing | Nylon |
| Description – Straight Body Plug | Contact Blades | Brass |
| Type – 2 Pole, 3 Wire, Grounding | Ground Blade | Brass |
| Rating – 15A, 125V | Line Terminal Screws | Steel-Copper, Multiple Drive |
| Verified to Fed. Spec. WC596 | Ground Screw | Steel (Green), Multiple Drive |
| Certification – UL Listed to UL 498 File E1706, CSA Certified to C22.2 No. 42 File 280C | Cable Inserts | Poly Phenylene Oxide |
| IP Suitability – IP20 | Wire Clamps | Steel |
| | Body Holding Screws | Steel, Multiple Drive |
| Connector Bodies | Part | Connector |
| Typical Specification – Catalog No. HBL5969VY | Connector Body | 15A |
| Manufacturer's Identification – Hubbell HBL5969VY | Housing | Nylon |
| Description – Straight Body Connector | Contact and Ground Springs | Brass |
| Type – 2 Pole, 3 Wire, Grounding | Line Terminal Screws | Steel-Copper, Multiple Drive |
| Rating – 15A, 125V | Ground Screw | Steel (Green), Multiple Drive |
| Verified to Fed. Spec. WC596 | Cable Inserts | Poly Phenylene Oxide |
| Certification – UL Listed to UL 498 File E1706, CSA Certified to C22.2 No. 42 File 280C | Wire Clamps | Steel |
| IP Suitability – IP20 | Body Holding Screws | Steel, Multiple Drive |

Performance

| Electrical | |
|--|---|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V or 250V as rated. |
| Current interrupting | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA (Brass, White, Green). |
| Terminal Accommodation | Copper conductors only. 2 Wire 15A Only #18-14 AWG, 2 Wire 20A & 3 Wire #18-12 AWG, Hospital Grade #16-12 AWG, I.D. Valise #18-16 AWG. |
| Product Identification | Molded Rating on Device Face. |
| Torque | 12 in./lb. terminal screws, 7 in./lb. assembly screws. |
| Cord Diameter Range | 2-Wire 15A Only .218–.385 in. (5.5–9.8), 2-Wire 20A & 3 Wire .220–.660 in. (5.6–16.8), Hospital Grade .300–.660 in. (7.6–16.8), I.D. Valise .230–.360 in. (5.8–9.1). |
| Environmental – Material | |
| Flammability | UL 94V-2. |
| Operating Temperature | Maximum continuous 75°C; minimum -40°C (w/o impact). |
| Standards | |
| NEMA® WD1 | |
| NEMA® Configurations | |
| Listed to UL Standard UL498 | |
| Certified to CSA Standard C22.2 No. 42 | |
| Verified to Federal Spec WC596 | |

NEMA® is a registered trademark of the National Electrical Manufacturers Association.



Technical Information



IEC 320 Devices

Specifications

| | |
|------------------------|--|
| Receptacle | |
| Catalog Number | H320R |
| Description | IEC Configuration compatible straight blade panel mount receptacle. |
| Type | 2 Pole + earth. |
| Rating | 16A 250V AC for European service; 20A 250V AC for North American service. |
| Certification | UL Listed 20A 250V AC – File No. E2186; CSA Certified 20A 250V AC – File No. 17337. |
| Terminal Accommodation | North American – #16-12 AWG stranded or solid copper conductor only. International – 1.55mm ² –2.5mm ² . |
| Connector | |
| Catalog Number | H320C |
| Description | IEC Detachable straight blade connector. |
| Type | 2 Pole + earth. |
| Rating | 16A 250V AC for European service; 20A 250V AC for North American service. |
| Configuration | IEC 60320-1 Style appliance coupler, C19. |
| Certification | UL Listed 20A 250V AC – File No. E1706; CSA Certified 20A 250V AC – File No. 17337; UL Classified to IEC 320, 16A 250V AC – File No. E111246; |
| Cord Accommodation | North American – 16/3SJ-12/3SJ (.325–.475 in. dia.); International – (HAR cord) 3x1.5mm ² –3x2.5mm ² (8mm–12mm dia.). |
| IP Suitability | IP20. |
| Plug | |
| Catalog Number | H320P |
| Description | IEC Configuration compatible straight blade Valise® plug. |
| Type | 2 Pole + earth. |
| Rating | 16A 250V AC for European service; 20A 250V AC for North American service. |
| Certification | UL Listed 20A 250V AC – File No. E1706; CSA Certified 20A 250V AC – File No. 17337. |
| Cord Accommodation | North American – 16/3 SJ-12/3SJ (.325–.475 in. dia.); International – (HAR cord) 3x1.5mm ² 3x2.5mm ² (8–12mm dia.). |
| IP Suitability | IP20. |
| Inlet | |
| Catalog Number | H320B and H320BL |
| Description | IEC Straight blade panel mount power inlet. |
| Type | 2 Pole + earth. |
| Rating | 16A 250V AC for European service; 20A 250V AC for North American service. |
| Configuration | IEC 60320-1 Style appliance coupler, C20. |
| Certification | UL Listed 20A 250V AC – File No. E1706; CSA Certified 20A 250V AC – File No. 17337; UL Classified to IEC 320, 16A 250V AC – File No. E111246; |
| Terminal Accommodation | VDE Certified at 16A 250V AC – File No. 12469 1550 1002. North American – #16-12 AWG stranded or solid copper conductor only. International – 1.5mm ² –2.5mm ² . |



Technical Information

Heavy Duty Insulgrip® Plugs and Receptacles



HBL9431C



HBL9430A

Specifications

| Plug | Part | Description |
|--|---------------------------|------------------------------------|
| Typical Specification - Catalog No. HBL9431C | Plug | 30A |
| Manufacturer's identification - Hubbell HBL9431C | Housing | Supertough Nylon |
| Description - Straight Body Plug | Blade Holder & Retainer | Reinforced Thermoplastic Polyester |
| Type - 3 Pole, 4 Wire, Grounding | Blades | Brass |
| Rating - 30A, 125/250V | Terminal Screws | 3/8 in. Allen Head, Plated Steel |
| Certification - UL Listed File E1706, CSA Certified* | Box Terminals | Copper Alloy |
| IP Suitability - IP20 | Cord Clamps | Reinforced Thermoplastic Polyester |
| | Mounting and Clamp Screws | Stainless Steel |
| | Cord Grip Range | .625–1.310 in. (15.9–33.3) |

| Receptacle | Part | Description |
|---|----------------------|------------------------------------|
| Typical Specification - Catalog No. HBL9430A | Receptacle | 30A |
| Manufacturer's Identification - Hubbell HBL9430A | Housing Construction | Reinforced Thermoplastic Polyester |
| Description - Single Receptacle | Mounting Plate | .062 in. (1.5) Pre-Plated Steel |
| Type - 3 Pole, 4 Wire, Grounding | Contacts | Brass |
| Rating - 30A, 125/250V | Ground Shunt | Brass |
| Certification - UL Listed File E2186, CSA Certified | Terminal Screws | 3/8 in. Allen Head, Plated Steel |
| | Box Terminals | Copper |

Performance

| Electrical | |
|---------------------------|--|
| Dielectric Voltage | Withstands 2,000V minimum. |
| Max. Working Voltage | 125V or 250V as rated. |
| Current Interruption | Certified for current interrupting at full rated current. |
| Temperature Rise | Max 30°C temperature rise at full rated current after 50 cycles of overload at 150% of rated current at a power factor of 75%. |
| Mechanical | |
| Terminal Identification | Terminals identified in accordance with UL 498 (Brass, White, Green). |
| Terminal Accommodation | #12 AWG through #4 AWG copper wire only. |
| Production Identification | Ratings are a permanent part of the device. |
| Environmental | |
| Flammability | Receptacle: UL 94 VO. Plug: UL 94 HB (Housing), UL 94 VO (Blade Holder and Retainer). |
| Operating Temperature | Maximum continuous 60°C, minimum -40°C (w/o impact). |

Note: *Listed to UL Standard 498 (Attachment Plugs and Receptacles), Certified to CSA Standard 42M (General Use Receptacles, Attachments, Plugs and Singular Wiring Devices) where applicable.