

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

B1-**DW Speedi Plumb® PLUS Braided Dishwasher Connector - Compression Inlet

Use: For use in potable water distribution systems in accessible locations only

Design Features:

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** ensures durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection
- **8-sided pneumatic crimp** provides greater dependability for realible nut-to-hose connections
- **No Lead**



Operating Specifications:

Temperature: 40°- 140° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)



MATERIAL SPECIFICATIONS	
Inner Hose	Reinforced PVC
Braiding	PVC coated polyester yarn
Barb	Brass
Ferrule	Zinc-plated steel
Washer	Rubber
Compression Nut	Brass, chrome plated
Elbow Adaptor	Brass
Fitting Adaptor	Brass, chrome plated

Part Listing:

- B1-12DW F 3/8" compression x 3/8" compression x 12" length
- B1-16DW F 3/8" compression x 3/8" compression x 16" length
- B1-20DW F 3/8" compression x 3/8" compression x 20" length
- B1-36DW F 3/8" compression x 3/8" compression x 36" length
- B1-48DW F 3/8" compression x 3/8" compression x 48" length
- B1-48DW6 F 3/8" compression x 3/8" compression x 48" length w/ 3/8" MIP elbow
- B1-48DW6 P 3/8" compression x 3/8" compression x 48" length w/ 3/8" MIP elbow, bagged
- B1U-48DW612 D Universal Connector - 3/8" compression x 3/8" compression x 48" length w/ 3/8" MIP elbow, 1/2" compression, & 1/2" FIP adaptors, carded

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.




B1-**DW Speedi Plumb® PLUS Braided Dishwasher Connectors - Compression Inlet

Part Listing (con't):

<input type="checkbox"/>	B1-48DW1 B	3/8" compression x 48" length w/ 3/4" crimped garden hose elbow, bulk
<input type="checkbox"/>	B1-48DW1 P	3/8" compression x 48" length w/ 3/4" crimped garden hose elbow, bagged
<input type="checkbox"/>	B1-48DW12 F	3/8" compression x 3/8" compression x 48" length w/ 3/4" garden hose elbow
<input type="checkbox"/>	B1-48DW12 P	3/8" compression x 3/8" compression x 48" length w/ 3/4" garden hose elbow, bagged
<input type="checkbox"/>	B1-60DW F	3/8" compression x 3/8" compression x 60" length
<input type="checkbox"/>	B1-60DW6 F	3/8" compression x 3/8" compression x 60" length w/ 3/8" MIP elbow
<input type="checkbox"/>	B1-60DW6 P	3/8" compression x 3/8" compression x 60" length w/ 3/8" MIP elbow, bagged
<input type="checkbox"/>	B1-60DW1 B	3/8" compression x 60" length w/ 3/4" crimped garden hose elbow, bulk
<input type="checkbox"/>	B1-60DW1 P	3/8" compression x 60" length w/ 3/4" crimped garden hose elbow, bagged
<input type="checkbox"/>	B1-60DW12 F	3/8" compression x 3/8" compression x 60" length w/ 3/4" garden hose elbow
<input type="checkbox"/>	B1-60DW12 P	3/8" compression x 3/8" compression x 60" length w/ 3/4" garden hose elbow, bagged
<input type="checkbox"/>	B1-72DW F	3/8" compression x 3/8" compression x 72" length
<input type="checkbox"/>	B1-72DW6 F	3/8" compression x 3/8" compression x 72" length w/ 3/8" MIP elbow
<input type="checkbox"/>	B1-72DW6 P	3/8" compression x 3/8" compression x 72" length w/ 3/8" MIP elbow, bagged
<input type="checkbox"/>	B1-72DW1 B	3/8" compression x 72" length w/ 3/4" crimped garden hose elbow, bulk
<input type="checkbox"/>	B1-72DW1 P	3/8" compression x 72" length w/ 3/4" crimped garden hose elbow, bagged
<input type="checkbox"/>	B1-72DW12 F	3/8" compression x 3/8" compression x 72" length w/ 3/4" garden hose elbow
<input type="checkbox"/>	B1-72DW12 P	3/8" compression x 3/8" compression x 72" length w/ 3/4" garden hose elbow, bagged
<input type="checkbox"/>	B1-72DW612 B	3/8" compression x 3/8" compression x 72" length w/ 3/4" garden hose elbow, bulk
<input type="checkbox"/>	B1U-72DW612 D	Universal Connector - 3/8" compression x 3/8" compression x 72" length w/ 3/8" MIP elbow, 1/2" compression, & 1/2" FIP adaptors, carded
<input type="checkbox"/>	B1-120DW F	3/8" compression x 3/8" compression x 120" length

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

B1-**DW Speedi Plumb® PLUS Braided Dishwasher Connectors - Compression Inlet

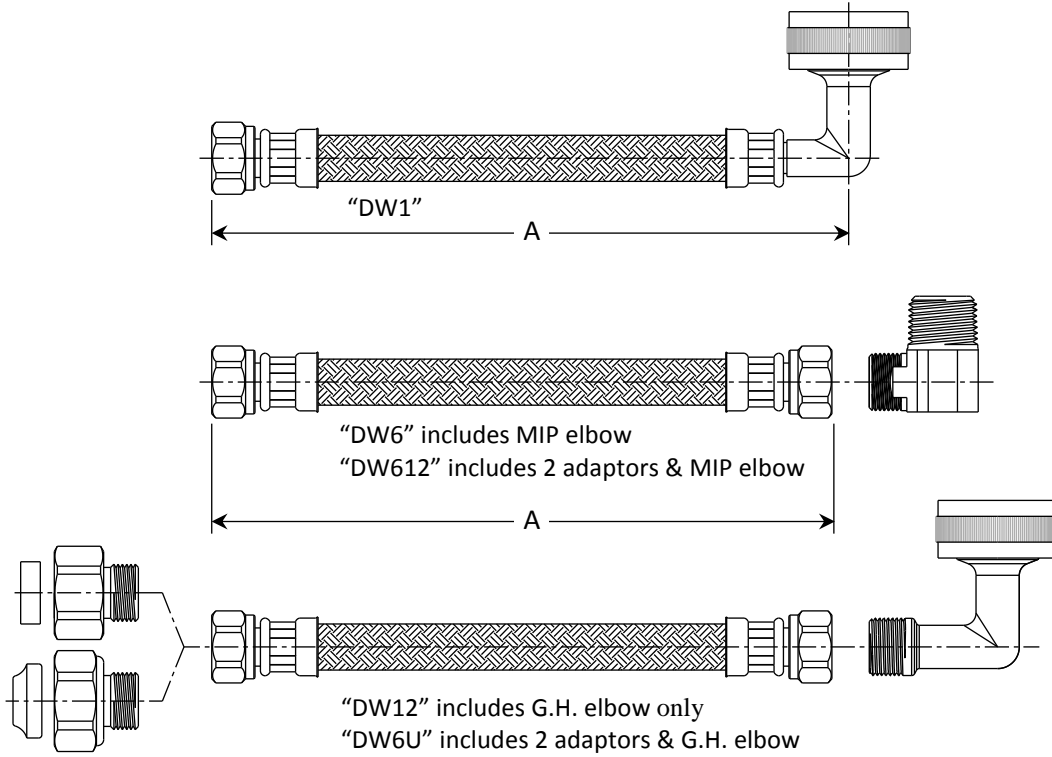

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-12DW	12.0 / 13.0
B1-16DW	16.0 / 17.0
B1-20DW	20.0 / 21.0
B1-36DW	36.0 / 37.0

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-48DW	48.0 / 49.0
B1-48DW6	48.0 / 49.0
B1U-48DW6	48.0 / 49.0
B1-60DW	60.0 / 61.0

PART DIMENSIONS (Inches)	
Model	DIM. A
B1-60DW6	60.0 / 61.0
B1-72DW	72.0 / 73.0
B1-72DW6	72.0 / 73.0
B1-120DW	120.0 / 121.0

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (Including NSF 61 and NSF 372)(File 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (Including NSF 61 and NSF 372)(File 204593)
- No-lead product CSA listed to NSF 372 (Class 6853-01)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Co., and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.

400.108 B1-DW SPP Braided Dishwasher Connector REV 04/16

BrassCraft®

© 2016 BrassCraft Mfg. Co.