


*For Residential and Commercial Applications*


Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## SWBOPS 3/4" ID Coated Stainless Steel Water Heater Connector – Push Connect x Female Iron Pipe

**Use:** For use in exposed locations only to connect water heaters, water softeners, and other water connected devices to the water supply. Compatible with PEX, copper, and CPVC.

**Design Features:**

- **Proprietary ProCoat® clear coat** provides superior corrosion protection from most harsh chemicals that can cause surface deterioration and pinhole leaks
- **Secure push connect connection**
- **No soldering or glue** needed for installation
- **Removes the need for additional transition fittings**
- **Full flow, maximum performance.** 3/4" internal diameter provides greater water flow without obstruction
- **Integrated dielectric sleeve** effectively isolates dissimilar metals within the waterway to help prevent galvanic and electrolytic corrosion
- **No dielectric union needed** with installation. Dielectric is built-in to the design of the connector\*
- **Less torque to seal** against the pliable rubber washer, especially on rough nipple surfaces
- **Longer connector nut** allows a greater number of thread-to-thread contacts and a better seal
- **100% leak tested** prior to coating application to ensure connector performance and reliability
-  **No Lead**

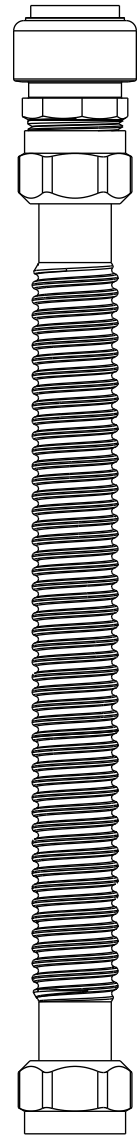

**Operating Specifications:**

**Temperature:** 40° - 180° F

**Water Pressure:** 125 PSI maximum

<b>MATERIAL SPECIFICATIONS</b>	
<b>Tubing</b>	Stainless steel
<b>Dielectric Sleeve</b>	Polypropylene
<b>Nut</b>	Brass, chrome plated
<b>Washer</b>	Rubber
<b>Push Connect O-ring</b>	Rubber
<b>Gripper Ring</b>	Stainless steel
<b>Release Collar &amp; Capsule</b>	Plastic
<b>Tube Stiffener</b>	Plastic

*\*Check with your local inspection office for applicable code requirements*


*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.*



# SWBOPS 3/4" ID Coated Stainless Steel Water Heater Connector – Push Connect x Female Iron Pipe

**Part Listing:**

- SWBOPS-12N 3/4" push connect x 3/4" FIP x 12" length
- SWBOPS-15N 3/4" push connect x 3/4" FIP x 15" length
- SWBOPS-18N 3/4" push connect x 3/4" FIP x 18" length
- SWBOPS-24N 3/4" push connect x 3/4" FIP x 24" length

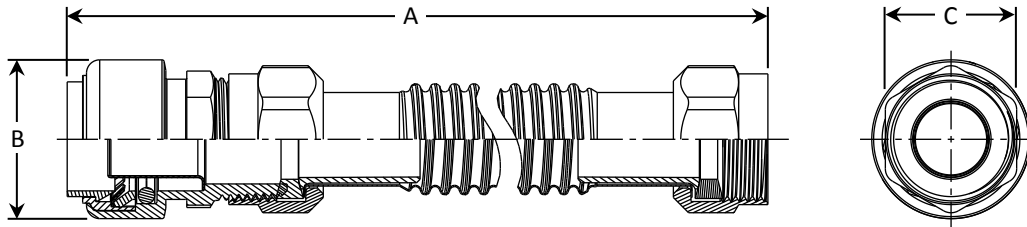

PART DIMENSIONS ( Inches )			
Model	DIM. A	DIA. B	HEX. C
SWBOPS-12N	13.30/14.10	1.36	1.12
SWBOPS-15N	16.30/17.10	1.36	1.12
SWBOPS-18N	19.30/20.10	1.36	1.12
SWBOPS-24N	25.30/26.10	1.36	1.12

**Listings & Certifications:**

- CSA listed to ASME A112.18.6 and CSA B125.6 (File # 204593)
- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- No-lead product CSA listed to NSF 372 (Class 6853-01)



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg. if requested.*

BrassCraft®