



Main

| | |
|-----------------------------|-------------------------------|
| Product or component type | Miniature circuit-breaker |
| Range of product | QOU |
| Circuit breaker type | Standard |
| Circuit breaker application | HACR and Switching Duty rated |

Complementary

| | |
|--------------------------------|--|
| Line Rated Current | 60 A |
| Number of Poles | 2P |
| Interrupt Rating | 10 KA 120/240 V AC 10 KA 120 V AC 5 kA 48 V DC |
| Electrical connection | Slotted box lugs, line side Slotted box lugs, load side |
| [Ue] rated operational voltage | 120/240 V AC 120 V AC 48 V DC |
| Mounting mode | Unit mount |
| AWG gauge | AWG 14...AWG 2 aluminium/copper |
| Maximum Height | 4.05 in (102.87 mm) |
| Maximum Depth | 2.95 in (74.93 mm) |
| Maximum Width | 1.5 in (38.10 mm) |
| Tightening torque | 45 lbf.in (5.08 N.m) AWG 14...AWG 2) |

Environment

| | |
|------------------------|-------------------------|
| Product certifications | UL Listed CSA IEC |
|------------------------|-------------------------|

Ordering and shipping details

| | |
|-----------------------|-------------------------------|
| Category | 00900 - QOU BREAKERS & SWITCH |
| Discount Schedule | DE2 |
| GTIN | 00785901418801 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 0.8 lb(US) (0.36 kg) |
| Returnability | Yes |
| Country of origin | MX |

Packing Units

| | |
|------------------------------|----------------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 3.60 in (9.144 cm) |
| Package 1 width | 4.80 in (12.192 cm) |
| Package 1 Length | 2.10 in (5.334 cm) |
| Unit Type of Package 2 | CAR |
| Number of Units in Package 2 | 24 |
| Package 2 Weight | 19.40 lb(US) (8.8 kg) |
| Package 2 Height | 3.70 in (9.398 cm) |
| Package 2 width | 13.60 in (34.544 cm) |
| Package 2 Length | 20.80 in (52.832 cm) |
| Unit Type of Package 3 | PAL |
| Number of Units in Package 3 | 288 |
| Package 3 Weight | 272.00 lb(US) (123.377 kg) |
| Package 3 Height | 40.00 in (101.6 cm) |
| Package 3 width | 42.00 in (106.68 cm) |
| Package 3 Length | 48.00 in (121.92 cm) |


Offer Sustainability

| | |
|-----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |
| Halogen content performance | Halogen free product |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Approximate Dimensions

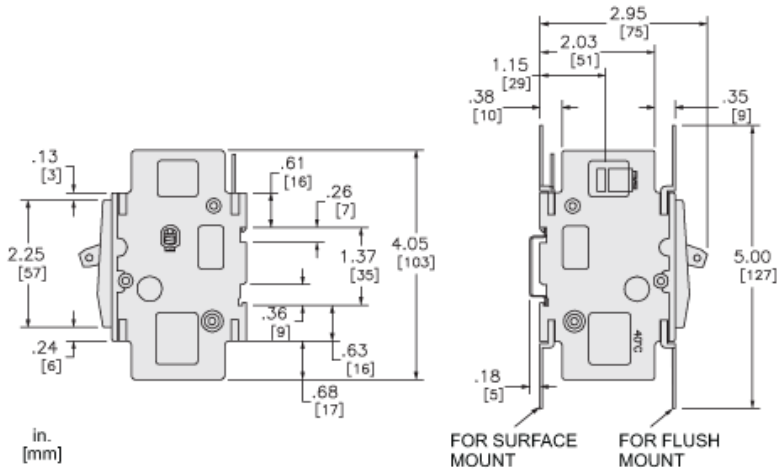

2.50 [64] MIN. WIRE BENDING SPACE FOR 2 AWG
1.50 [38] MIN. WIRE BENDING SPACE FOR 14 AWG
TYP. BOTH ENDS FOR ALL CB'S SHOWN PER ARTICLE 430-1-(B) NEC

