

SPECIFICATION & FEATURES

DESCRIPTION:

Orbit's Preassembled UMA-LVBS with Square Box and Device Ring is a ready-to-install solution for common switch and receptacle rough-ins. LVBS Series can be deployed on the job site with little to no assembly required, saving nearly a minute per box. LVBS assemblies mount direct to open or closed sides of a wall stud, with integrated back support for 2-1/2" and 3-1/2" stud depths (extend to 6" with FS-456-EXT). Mount assembly between wall studs or ceiling joists with SSB-T5. 2-1/8" Deep Square Box includes 10" grounding pigtail. Select models available with 1-gang and 2-gang device rings, and/or BMCS-CJ6 cable support.


FEATURES:

- Mounts direct-to-stud, or snaps onto the SSB-T5 for stud-to-stud mounting
- Centerline cutouts and mounting holes on UMA-LVBS's flanges allow for a quick installation onto wood or metal studs
- Top notch provides easy access to set screw fittings
- Includes far-side back support
- Box includes 10-32 Ground Screw and 10" Solid Cu. #12AWG Pigtail
- LVBS-A4 Series features MC clamp screws set at 15° angle, includes BMCS-CJ6 cable support

CONFIGURATION DATA:

Part No.	Description	No. of Gangs	Ring Depth	Std. Pkg.
LVBS-4	UMA-LVBS + 4SDB-MKO-PT-10	-	-	25
LVBS-4-158	UMA-LVBS + 4SDB-MKO-PT-10 + 41058	1	5/8"	25
LVBS-4-175	UMA-LVBS + 4SDB-MKO-PT-10 + 41075	1	3/4"	25
LVBS-4-258	UMA-LVBS + 4SDB-MKO-PT-10 + 42058	2	5/8"	25
LVBS-4-275	UMA-LVBS + 4SDB-MKO-PT-10 + 42075	2	3/4"	25
LVBS-4-A158	UMA-LVBS + 4SDB-MKO-PT-10 + 4AR1G-58	1	5/8" - 1-1/4"	25
LVBS-4-A134	UMA-LVBS + 4SDB-MKO-PT-10 + 4AR1G-34	1	3/4"	25
LVBS-4-A258	UMA-LVBS + 4SDB-MKO-PT-10 + 4AR2G-58	2	5/8" - 1-1/2"	25
LVBS-A4-CS6	UMA-LVBS + 4SDB-AMC-PT + BMCS-CJ6	-	-	25
LVBS-A4-A158-CS6	UMA-LVBS + 4SDB-AMC-PT + 4AR1G-58 + BMCS-CJ6	1	5/8" - 1-1/2"	25

LVBS ASSEMBLIES

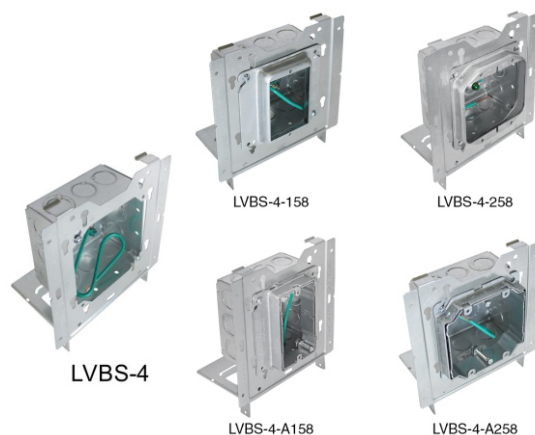

SPECIFICATIONS:

Box Dimensions

- Width: 4"
- Height: 4"
- Material: Sheet Steel
- Standard Boxes:
 - KO Sides: (8) - 1/2", (4) - MKO
 - KO Bottom: (2) - 1/2", (2) - MKO
- MC Cable Boxes:
 - KO Sides: (4) - 1/2", (2) - MKO, (4) - Loom
 - KO Bottom: (1) - 1/2"
- Depth: 2 - 1/8"
- Volume: 30.3 Cu.In.
- Color: Galvanized

Custom Assemblies:

For box and adapter assembly combinations not listed above, please contact info@orbitprofab.com. Please state the specific ring type, box size and depth, and any other pertinent notes (such as the addition of ground pigtails or firestop).



LVBS-4-158 shown installed on SSB-T5



LVBS-4-158 shown installed


 Up to 6" BS w/
FS-456-EXT


LVBS-A4-CS6

LVBS-A4-A158-CS6




www.orbitelectric.com

Application and Performance Specification Information is Subject to Change Without Notification

LOS ANGELES, CA 1-800-90-ORBIT

