

Copper Shut-Off Tool Operating Instructions

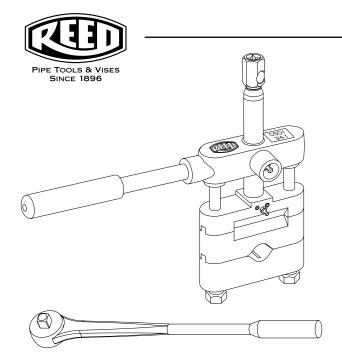

CSO1R ³/₄" - 1" (19-25 mm) CSO2R 1 ¹/₄" - 2" (32-51 mm)

Reed Manufacturing Company 1425 West 8th Street Erie, PA 16502 USA

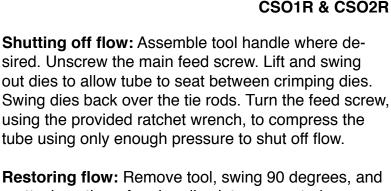

Restoring flow: Remove tool, swing 90 degrees, and reattach so the reforming die slots are seated over the edges of the crimped tube. Turn the feed screw to compress the reforming dies and restore flow. Expect 70 - 75% return of flow.

Note: Use the grease fittings inside the front handle hole and at the top crimp bar for lubricating the feed screw and the thrust washer.



Phone: 800-666-3691 or 814-452-3691 Fax: 800-456-1697 or 814-455-1697

www.reedmfgco.com

0418 - 58203

PIPE TOOLS & VISES SINCE 1896

CSO1R 3/4" - 1" (19-25 mm) CSO2R 1 1/4" - 2" (32-51 mm)

Copper Shut-Off Tool Operating Instructions

CSO1R & CSO2R

Shutting off flow: Assemble tool handle where desired. Unscrew the main feed screw. Lift and swing out dies to allow tube to seat between crimping dies. Swing dies back over the tie rods. Turn the feed screw, using the provided ratchet wrench, to compress the tube using only enough pressure to shut off flow.

Restoring flow: Remove tool, swing 90 degrees, and reattach so the reforming die slots are seated over the edges of the crimped tube. Turn the feed screw to compress the reforming dies and restore flow. Expect 70 - 75% return of flow.

Note: Use the grease fittings inside the front handle hole and at the top crimp bar for lubricating the feed screw and the thrust washer.

