


 $\begin{array}{c} \mathbf{n}, \mathbf{D}, \mathbf{n}, \mathbf{A}, \mathbf{N}, \mathbf{D} \\ \text{an oatey innovation} \end{array}$



FREESTANDING TUB DRAIN

The 1916 Collection Universal Freestanding Tub Drain works with freestanding island center and offset tubs. When installed at rough-in, it provides simple installation between the P-trap and tub — without needing access from below the floor.

Available in ABS, PVC or cast iron with a plastic or stainless steel flange, this drain is compatible with brass or Schedule 40 tailpieces. 1916 Collection is a carefully curated portfolio of thoughtfully designed, exceptionally engineered bath accessories that enhance both the form and function of every bath experience.

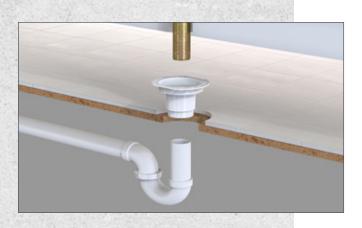







EASY, FAST INSTALLATION

- Simplifies rough-in installation between P-trap and tub
- Eliminates "stub out" method and the need to access the drain from below the floor

UNIVERSAL COMPATIBILITY

- Universal drain for freestanding/island center and offset tubs
- Compatible with brass or Schedule 40 tailpieces

COMPACT SIZE

- Compact size allows the drain to fit inside 8 in., 10 in. and 12 in. joists
- Fits inside 4 in. hole saw opening, making this drain great for remodels

JOBSITE READY

- Pre-installed, tool-free 1/4 turn test plug allows for testing up to 40 ft. of head
- Easy-to-grab protective cap keeps tile from being installed over the open drain and can be easily removed with channel locks













FTD5135

FTD5135P

FTD35

PART NUMBER

PRODUCT DESCRIPTION

FTD5135	Plastic PVC construction with stainless steel flange
FTD5135P	Plastic PVC construction with a one-piece design
FTD35	Plastic ABS construction with stainless steel flange
FTD35P	Plastic ABS construction with a one-piece design
FTD357	Cast iron construction with stainless steel flange

EACH KIT INCLUDES:

- Freestanding tub drain body
- Protective cap
- 1.5 in. X 2 in. Schedule 40 PVC/ABS adapter (Adapter not included with FTD357)
- 1.5 in. X 8 in. flanged brass tailpiece
- 1.5 in. X 8 in. threaded brass tailpiece
- Slip joint nut

• Slip joint washer

- 1.5 in. Schedule 40 PVC/ABS threaded tailpiece adapter
- Quarter turn test plug
- Cutout template
- Lubricant

PATENT PENDING